


NOTES:

1. ASSEMBLY MARKED WITH MOLEX, MOLEX P/N, REV & DATE CODE IN YYWW FORMAT. SEE EXAMPLE 1.

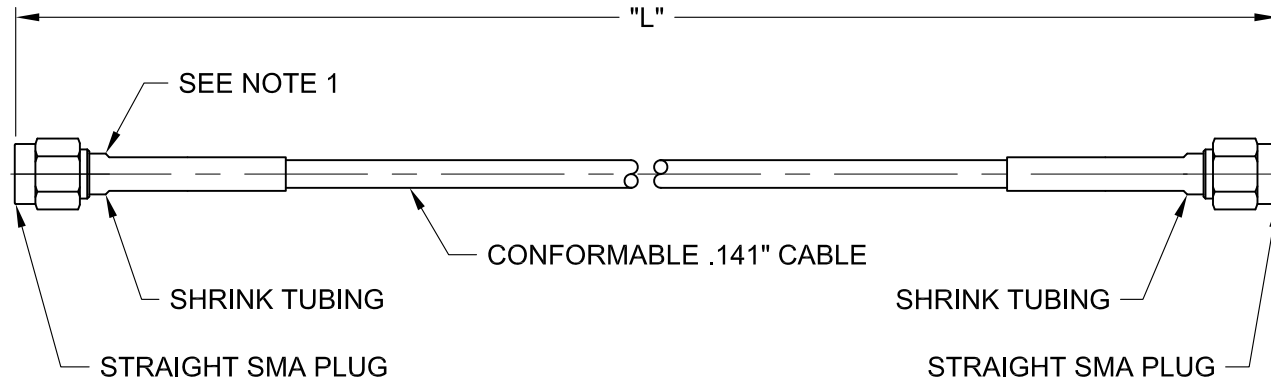

2GHz		6GHz		FCT P/N	MOLEX P/N	LENGTH	TOLERANCE
VSWR MAX	IL MAX	VSWR MAX	IL MAX				
1.10	.180 dB	1.20	.300 dB	24P104C24P1-003	73230-9343	3.000"	±.150
1.10	.200 dB	1.20	.350 dB	24P104C24P1-006	73230-9340	6.000"	±.150
1.10	.250 dB	1.20	.450 dB	24P104C24P1-009	73230-9344	9.000"	±.150
1.10	.300 dB	1.20	.530 dB	24P104C24P1-012	73230-9342	12.000"	±.175
1.10	.400 dB	1.20	.700 dB	24P104C24P1-018	73230-9341	18.000"	±.200

EXAMPLE 1:

MOLEX 73230-934X
REV. XX YYWW

QUALITY SYMBOLS ∇ = 0 ∇ = 0 ∇ = 0 ▼ = 0 ∇ = 0 ☒ = 0 ■ = 0 ▽ = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	DIMENSION UNITS INCH [mm]	SCALE NTS		
	GENERAL TOLERANCES (UNLESS SPECIFIED)	DRWN BY JEL	DATE 10/21/08		CABLE ASSEMBLY - SMA PLUG TO SMA PLUG
	4 PLACES ± ±	CHR'D BY TM	DATE 10/21/08		
	3 PLACES ± ±	APPR BY KJT	DATE 10/21/08		
	2 PLACES ± ±	ANGULAR TOL ± °	DRAWING SIZE A		
1 PLACES ± ±	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SERIES 73230	MATERIAL NUMBER SEE TABLE	CUSTOMER GENERAL MARKET	
0 PLACES ± ±	EC NO: 689506 DRWN: JWB CHKC: JED APPR: KJT	DOCUMENT NUMBER SD-73230-934	DOC TYPE PSD	DOC PART 000	SHEET NUMBER 1 OF 1