


114030A05MXXX

LENGTH

- 010 - 1M
- 050 - 5M
- 200 - 20M

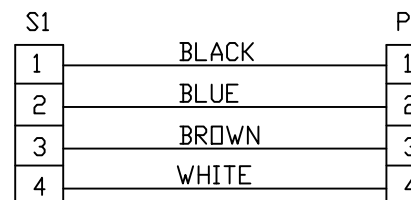

WIRING DIAGRAM

NOTES:

MECHANICAL
 CONTACT : GOLD/NICKEL OVER COPPER ALLOY
 INSERT : YELLOW PVC
 COUPLING NUT: BLACK ELECTROPHORETIC COATING OVER ZINC DIECAST
 MOLDED BODY: YELLOW PVC
 CABLE: 18 AWG 4 CONDUCTORS YELLOW PVC JACKET
 WRAP LABEL: YELLOW VINYL

ELECTRICAL
 VOLTAGE RATING: 300V AC/DC
 AMPERAGE: 7A

ENVIRONMENTAL
 OPERATION TEMP: 80°C

INITIAL RELEASE EC NO: IPG2013-1205 DRWN: BARDEN 2013/02/06 CHKD: TWOLDEGE APPR: JFMURPHY 2013/06/21	DESCRIPTION REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE INCH ONLY		SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		
		$\nabla=0$ $\sphericalangle=0$	mm	INCH	DRAWN BY	DATE	TITLE	MOLEX INCORPORATED		MINI CHANGE ASSEMBLY 4 POLE MALE/FEMALE ST/ST 18/4C AWG PVC YELLOW	
		4 PLACES	±---	±---	BARDEN	2013/02/06					
		3 PLACES	±---	±.005	CHECKED BY	DATE					
2 PLACES	±0.13	±.010	TWOLDEGE	2013/02/15	APPROVED BY	DATE	DOCUMENT NO.		SHEET NO.		
1 PLACE	±0.25	±.020	JFMURPHY	2013/06/21	MATERIAL NO.		SD-130010-026		1 OF 1		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			ANGULAR ±.5°		SIZE B		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				