
ם בד בר			0	σ	≻	
Image: second	200 Contraction of the second se					4
ω	,		LAYOUT SHO	NN AS EXAMPLE		3
	Keying Shown as example					
<ul> <li>CHARACTERISTICS</li> <li>-Standard : Based on MIL-DTL-38999 Series III</li> <li>-Shell Material : Composite</li> <li>-Shell Plating : Olive drab Cadmium</li> <li>-Insulator : Thermoplastic</li> <li>-Contacts : Copper Alloy</li> <li>-Seals &amp; Grommet : Silicon Elastomer</li> <li>-Contact Plating : Gold over copper Alloy 0.8µm minimum</li> <li>-Durability : 500 Mating cycles</li> <li>-Delivered with Souriau contacts and Accessories</li> <li>-Temperature Range : -65°C to +175°C</li> </ul>	Connector dimensionDimNominalØS29.4 MaxZ'31.5 MaxVV THREADM18x1-6g	A 17-10-2016	due to a use of the Pro- the Specifications issued by (professional recon <b>PN: 8D</b>	Country Jurisdiction	y with third party	2
-Salt Spray : 2000 hours		ISS DATE Designed By:	Latest modification - by Date:		MOD N USTOMER DRAWING	<u>N°</u>
		TITLE				
BASIC SERIES:     8D     5     -     13       →     SHELL TYPE : Plug with RFI Shielding     -     -     13	08 H A	SCALE NA	Genera Tolera ±	nces:	NPRDS / PROJECT 859 This document is the property of	
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 13	ORIENTATIO CONTACT TYPE : PIN (1500 Ma		SOURIAU         WWW.SOURIAU.COM         Inis document is the property of SOURIAU           it must not be reproduced or communicated without permission         it must not be reproduced or communicated without permission			
PLATING : J = Olive drab Cadmium	CONTACT LAYOUT :			RIAU DRG N° 513J08HA-C	SHEET 1/2	
H G	F E	D	C	B	A	

		۵	г	m		0
		Contact Layout				
4		$X \left( \begin{array}{c} & & & \\ & & \\ & & \\ & & \\ & \\ & \\ & \\ $				
		Contacts           Contact location           Nated (Inm)         Contact location (mm)           A         +.065 (1.65)         +.157 (3.99)           B         +.170 (4.32)         +.000 (0.00)           C         +.120 (3.05)        120 (3.05)           D         ·.000 (0.00)        170 (4.32)           E        120 (3.05)        120 (3.05)           F        170 (4.32)         +.000 (0.00)           G        065 (1.65)         +.157 (3.99)           H         +.000 (0.00)         +.004 (1.12)				
ى ى	Shell     Arrangement     Nu       size     no.     ct       13     -8     -8	imber of Size Service Contact Supersede ontacts contacts rating location 8 20 I All MS20051-				
	<b>-</b>					SOURIAU shall not be liable for an due to a use of the Products wi the Specifications issued by either o (professional recommenda
22						Counti FR PN: 8D513.
					A 17-10-20 ISS DATE Designed By:	116 First Release Latest modification - by Date:
					TITLE	Compo General linear
<u> </u>					NA SOURIA	Tolerances:
					FORMAT A3	SOURIAU
	Н	G	F	E	D	8D513J0

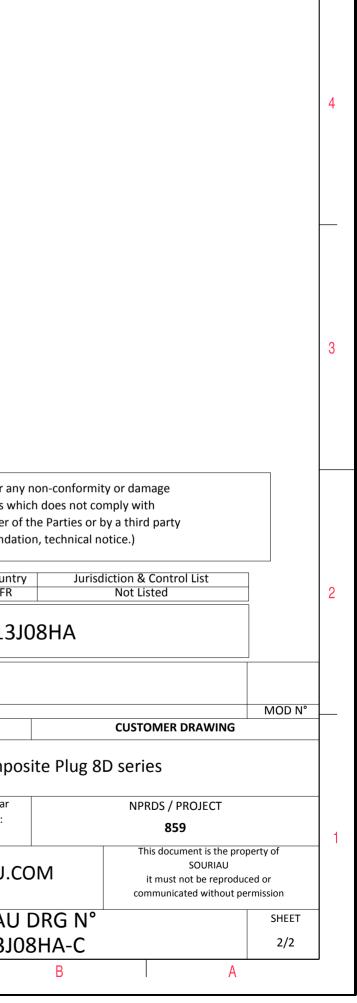

 $\triangleright$ 

σ