T 1	G		l m		
				_	







LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : X = Without Plating

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

ł	-Shell Material	: Composite			
	-Shell Plating	: Without Plating			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
	-Contact Plating	: Gold over copper Alloy 0.8 μm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered without Souriau contacts				
	-Temperature Range	-65℃ to +175℃			
	-Salt Spray	: 2000 hours			

: 10.3 g ± 10%

8D 0

G

11

Х

02


S


F

В ΙL

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		

Е



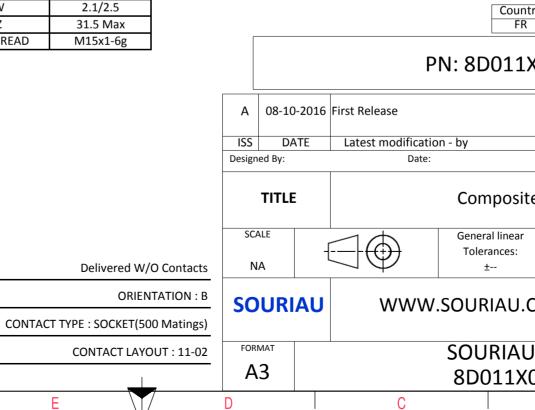

	σ			A		
						4
						3
	MPLE				1	
whic er of tl	non-conformit h does not co he Parties or t n, technical n	mply with by a third otice.)	n party			
intry R	y Jurisdiction & Control List Not Listed					2
1XC	X02SBL					
					/IOD N°	
		CUSTO	MER DRAWI	I		
ite I	te Receptacle 8D series					
ar	NPRDS / PROJECT 859					
	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
U DRG N° SHEET						
X02	2SBL-C				1/2]
	В			A		

г	<u>т</u>	G	L L	m	D	0
		Contact Layout				Panel Cutou
4	.× .2 (2)95 (2.4imm)			کر ۔ ج	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Shell Arrangement size no. 11 -2	tition X-axis Y-axis D (mm) (mm) A +.095 (2.41) +.000 (.00)	ct n		¥ (Dim
ω						ØA ØAA R1 ØT
	+					SOURIAU shall not be liable for an due to a use of the Products wh the Specifications issued by either of (professional recommendat
N						PN: 8D011X
					ISS DATE Designed By:	L6 First Release Latest modification - by Date:
<u> </u>					SCALE NA	General linear Tolerances:
					FORMAT A3	J WWW.SOURIAU.C SOURIAU 8D011X0
L	Н	G	F	E	D	C

