AUTOMATION & CONTROL

THE e**m4** Ethernet RANGE

The most intelligent and easiest network solution for managing your systems

› Simple to learn and use

› Optimised maintenance costs

› Reduced operating costs

› Improve energy management

› Easy data archiving

› Accurate measurements from your industrial sensors

› No training costs to consider

e**m4** Ethernet

Programmable Logic Controller communicating on local area network

› Manage timed or trigger based data exchange between devices via simple function blocks (Modbus TCP/IP),

› Program and debug your e**m4** Ethernet from anywhere on the Ethernet local network,

› Receive scheduled simple datalogs via email or FTP,

› Send email alerts fully controlled by the application program.

- Communicate with up to 16 e**m4** Ethernet or other devices with the Ethernet Modbus TCP/IP standard protocol Client and Server
- Connect the touch panel directly to your e**m4** Ethernet

e**m4** tool box

e**m4** soft

Native Ethernet	No need for USB or Modbus accessories
Discovery	Automatically detect up to 8, and debug all e**m4** in the network
Modbus TCP/IP Client and server	Communicate with up to 16 devices on the network
Datalog via email or FTP	Receive scheduled .csv files via email or FTP
Event management by email	Receive an email as soon as an event occurs in your application
Go online	Connect to your e**m4** via the internet

e**m4** Ethernet TECHNICAL DATA

e**m4** Ethernet nano-PLC

e**m4** base - General data

	Main features
Power supply	24 V DC (-15% / +20%) 4W-6.5W
Operating temperature	-20°C to 60°C
MMI	4 lines of 18 characters (black and white) 6-button keypad
Programming	FBD (including SFC) Large capacity memory ~1000 functional blocks
Clock	Backed up by a recyclable internal battery with a 10-year lifespan
Connections	Ethernet, Modbus TCP/IP Client & Server, email, FTP
Optional interfaces	USB, RS485 slave Modbus
Protection	IP20 on I/O terminals IP40 on the Glossy front panel
Certification	CE, cULus listed

e**m4** base - Inputs

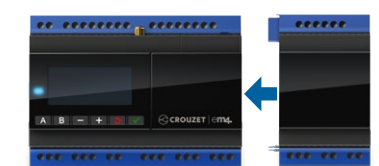| No.	Main features
4	24 V DC on/off inputs Quick encoder inputs (20kHz or 40kHz), counter (60kHz), tachometer, timer, time interval meter
8	24 V DC on/off inputs 12-bit analogue inputs (Potentiometer or 0-28.8V ±2%) for NTC, LDR 10-bit analogue inputs (0-10V ±1.1%)
4	24 V DC on/off inputs 12-bit analogue inputs (0-10V ±0.8%) 11-bit analogue inputs (0-20mA / 4-20mA ±1.2%)

Accuracy of analogue inputs at 25°C

e**m4** base - Outputs

No.	Main features
2	Static 24 V DC 0.5A digital outputs 10 bit PWM 24 V DC analog outputs (0-10V or 4-20mA with an external converter)
2	250 V AC / 6A relay outputs
6	250 V AC / 8A relay outputs One with NO/NC contact

e**m4** expansions

E10A analogue expansions

No.	Principal features
6	24 V DC on/off inputs 12-bit analogue inputs (0-10V ±0.8%) 11-bit analogue inputs (0-20 / 4-20mA ±1.2%)
2	24 V DC 0.5A static outputs 24 V DC PWM outputs (0-10V or 4-20mA outputs with external converter)
2	10-bit 0-10V analogue outputs (±1%)

Accuracy of analogue inputs and outputs at 25°C

E10R digital expansions

No.	Main features
6	24 V DC on/off inputs 12-bit analogue inputs (Potentiometer or 0-28.8V ±2%) for digital time converter, LDR 10-bit analogue inputs (0-10V ±1.1%)
2	250 V AC relay outputs / 6A digital outputs
2	250 V AC relay outputs / 8A digital outputs

Accuracy of analogue inputs at 25°C

max. 2 expansions

e**m4** Ethernet product pages

e**m4** Part numbers

	Description	Reference
Glossy Black	e**m4** Ethernet	88 981 133
	Starter kit e**m4** Ethernet	88 981 136
	e**m4** digital expansion E10R	88 982 113
	e**m4** analog expansion E10A	88 982 213
	Evaluation case e**m4** Ethernet	88 980 183

Ref. 670012 EN - 09/2017 - Photography - Visuals: Ginko / Crouzet / FreepIk / Flaticon

CROUZET

e**m4** ETHERNET

The most intuitive and easy to use nano-plc on your ethernet network

ABOUT CROUZET

The Automation & Control product lines offers timers, monitoring relays and counters which makes it easy to control the operation of industrial equipment. Our logic controllers and nano-PLCs automate larger jobs, offering the easiest to use function block programming and the ability to communicate remotely with your equipment. Crouzet is a brand of InnoVista Sensors™.

automation.crouzet.com

Contact:
Tel. +33 (0) 475 802 101
Fax +33 (0) 475 828 900
Email: info@em4-remote-plc.com

Follow us

Contact us!

InnoVista Sensors™: your trusted partner of choice to face industrial challenges of today and tomorrow.

InnoVista Sensors™ is a worldwide industrial specialist of sensors, controllers and actuators for automated systems.

Through its brands, Crouzet and Systron Donner Inertial, InnoVista Sensors™ offers a wide range of reliable, efficient and customizable components dedicated to the Aerospace & Defense, Transportation and Industrial markets and segments.

Thanks to the recognized expertise of its teams and a strong innovation policy, InnoVista Sensors™ brings performance enhancing solutions to its customers worldwide.
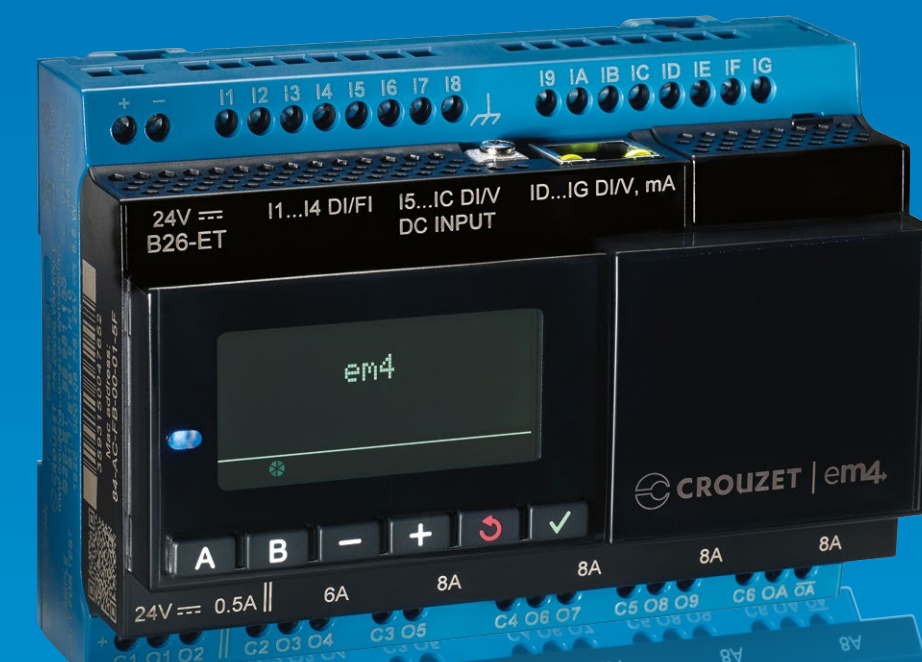
InnoVista Sensors™: your trusted partner of choice to face industrial challenges of today and tomorrow.

www.innovistasensors.com

automation.crouzet.com

e**m4** Ethernet,
AN EXTENDED IP CONNECTIVITY...

The programmable logic controller with Modbus TCP/IP communication, manages datalogs in .csv format (Excel) and alerts by email.

Complete access to your equipment:

Easy to set up
Program and set up your em4 Ethernet from your PC using standard network connections

Control, monitor and supervise
Manage automated installations using TCP/IP Ethernet Modbus

Essential information
Save data (datalog) from your installation and periodically receive a .csv file* by email or FTP server**

Simplified addressing
With auto discovery of e**m4** labels easily address up to 8 e**m4**

Whether you are an **installer, electrician, integrator, manufacturer of small machines** or you work in **a design office**, e**m4** Ethernet is perfectly suited to your needs.
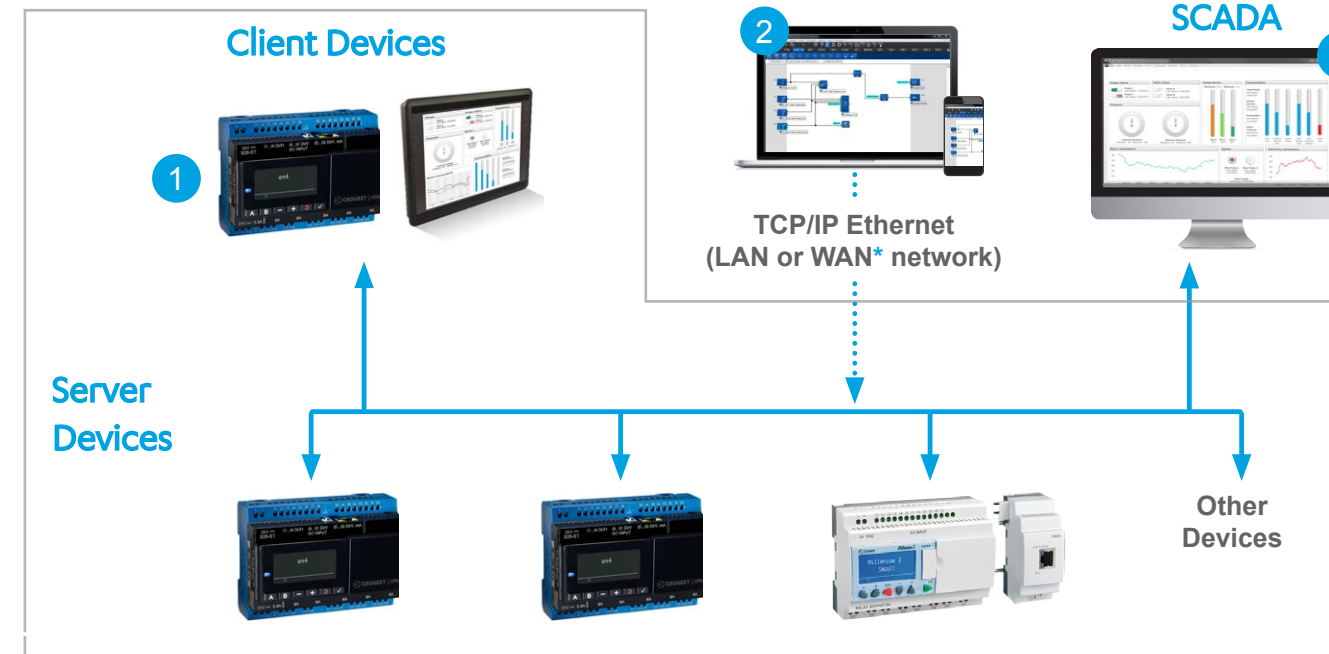
* Text file which can be manipulated in an Excel spreadsheet.
** The FTP (File Transfer Protocol) server transfers files via the Internet or a local computer network (intranet). Any person with the appropriate permission can upload and send files to a remote computer running such a server.

CREATE YOUR e**m4** NETWORK

Due to extensive connectivity options, remotely access the system in real time, manage and centralise data and take control of your installation.
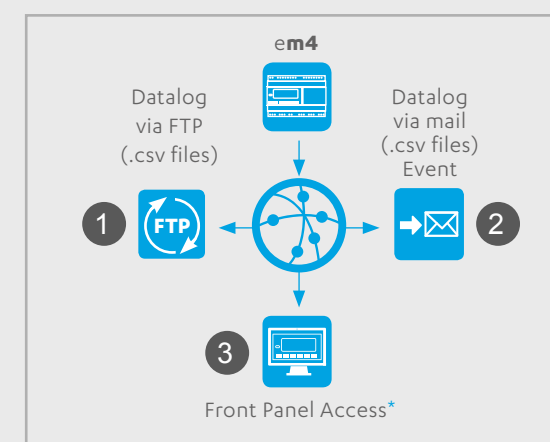
TCP/IP Modbus Network

Client Devices

SCADA

TCP/IP Ethernet
(LAN or WAN* network)

Server Devices

Other Devices

* External router to set up

1. Create your Modbus TCP/IP network by identifying client devices and server equipment

2. Manage your devices from your computer in a local network: Editing programs, Simulation and Debug program

3. Possibility of adding a SCADA for remote management of your installation in real time

Discover the network functionalities:

e**m4**

Datalog via FTP (.csv files)

Datalog via mail (.csv files) Event

Front Panel Access*

1. On an FTP server, periodically receive .csv files of saved variables

2. By mail, receive alerts or periodically .csv files of saved variables

3. Remotely check the e**m4** front panel without having access to the program

* Router requires configuration

---

e**m4** soft,
THE MOST INTUITIVE ON THE MARKET

The most intuitive, programming software on the market, e**m4** soft, includes all remote management functions in a single tool and it is a **free software**!

› **Saves time when designing your application** and remote functions by using a graphical programming language.

Analogue inputs
› Analogue input blocks integrating a scale factor and filtering function.
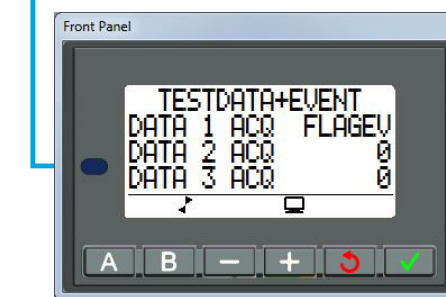
Easy integration
› **E**diting, **S**imulation and **D**ebug modes allow you to set up and configure your application program.

Datalog
› Up to three functional blocks allow the history of 24 values to be saved by sending a .csv file by email or FTP.

Simulation and Debugging Mode
› Optimised mode simulation,
› Colours make active signals clearly visible.

Label
› Easily identify your e**m4** on the network.

Event management
› Up to 24 customisable 'Event' blocks for sending alert messages directly to recipients or to your remote management system.

Access to the front panel
› Control the e**m4** front panel directly from your computer.