




GENERAL PURPOSE


- Expands up to 200%
- Cut and Abrasion Resistant
- Halogen Free
- FMVSS 302 Approval
- Cuts Easily with Scissors or a Hot Knife

## Extra Expansion For Easy Application

FLEXO® PET OVEREXPANDED (PTO) has many uses where inexpensive bundling is the principal consideration. Opens nearly 4-to-1 making it very easy to apply.

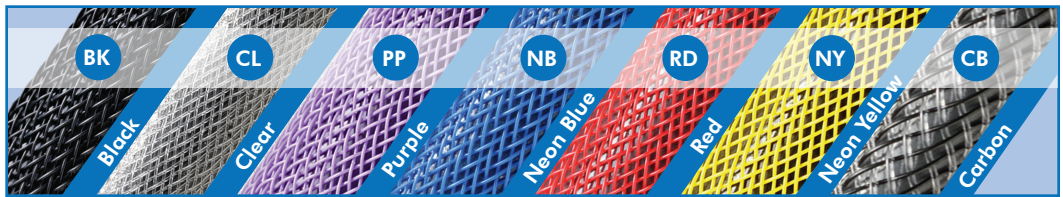

Nominal Size	Part #	Expansion Range		Standard Spool Put-Ups		Available Colors	Lbs/100'
		Min.	Max.	Bulk Spool	Shop Spool		
1/4"	PTO0.25BK	1/8"	1/2"	1,000'	200'	BK	0.24
5/16"	PTO0.31BK	1/4"	7/8"	500'	150'	BK	0.40
3/8"	PTO0.38	3/16"	1"	500'	125'	BK,CL,PP,NB,RD,NY,CB	0.52
1/2"	PTO0.50	7/16"	1 3/8"	500'	100'	CL & BK	0.63
3/4"	PTO0.75BK	1/2"	1 3/4"	250'	75'	BK	1.10

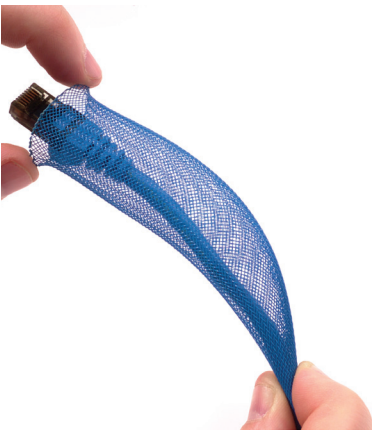

## Extra Coverage

TIGHT WEAVE (PTT) is designed for use in applications where optimum coverage and abrasion resistance is required. The tight braid construction increases the coverage, wear factor, and improves harness security.



Nominal Size	Part #	Expansion Range		Standard Spool Put-Ups		Available Colors	Lbs/100'
		Min.	Max.	Bulk Spool	Shop Spool		
1/8"	PTT0.13	1/16"	1/4"	1,000'	225'	BNR,BNB,BNO,BNY,BK	0.29
1/4"	PTT0.25	11/64"	11/32"	1,000'	200'	BNR,BNB,BNO,BNY,BK	0.36
5/16"	PTT0.31	1/4"	3/8"	1,000'	200'	BNR,BNB,BNO,BNY,BK	0.58
1/2"	PTT0.50	11/32"	5/8"	500'	100'	BNR,BNB,BNO,BNY,BK	0.84
3/4"	PTT0.75	1/2"	13/16"	250'	75'	BNR,BNB,BNO,BNY,BK	1.10
1"	PTT1.00	5/8"	1 1/8"	250'	65'	BNR,BNB,BNO,BNY,BK	1.23
1 1/4"	PTT1.25	1"	1 11/16"	250'	50'	BNR,BNB,BNO,BNY,BK	1.30
1 1/2"	PTT1.50	1 1/8"	2"	200'	40'	BNR,BNB,BNO,BNY,BK	1.95
1 3/4"	PTT1.75	1 1/2"	2 5/8"	200'	30'	BNR,BNB,BNO,BNY,BK	2.60
2"	PTT2.00	1 3/4"	3 1/8"	200'	50'	BNR,BNB,BNO,BNY,BK	3.43
2 1/2"	PTT2.50	2"	3 1/2"	100'	50'	BNR,BNB,BNO,BNY,BK	3.60

1 (833) SLEEVING  
www.techflex.com

