

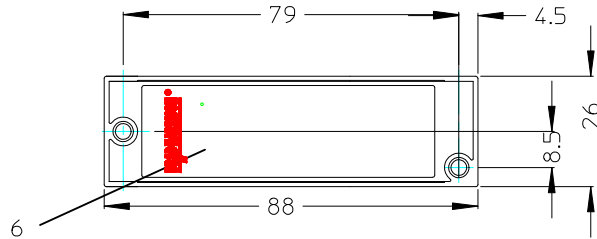
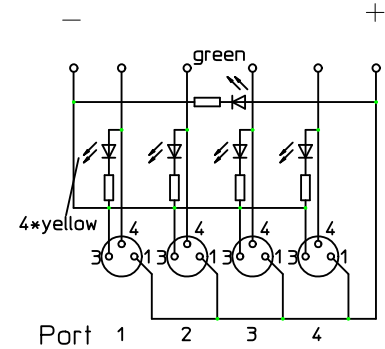


SAP-NUMBER	OLD PART NUMBER	FINISHED LENGTH
1201135063	BNY401P-FBM-05	5000
1201130024	BNY401P-FBM-10	10000

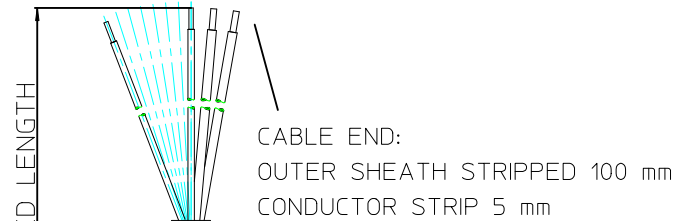


Ansicht X



Contact configuration	wire colour	+	wire mm <sup>2</sup>	Port	M8 connector Contact-No.
	brown	(+)	0.75	1-4	1
	blue	(-)	0.75	1-4	3
	white		0.34	1	4
	green		0.34	2	4
	yellow		0.34	3	4
	grey		0.34	4	4

**CLOSURE CAP**

SAP no. 1203080677  
Quantity 2

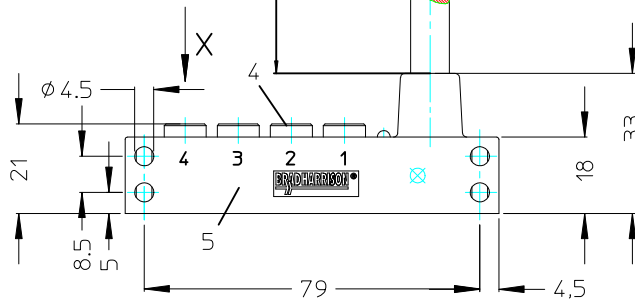

VOLTAGE RATING	10 - 30 VDC
AMPERAGE RATING PER PORT	2 A MAX./PORT 6 A MAX. TOTAL
PROTECTION	IP 67
OPERATING TEMPERATURE	-25°C / +90 °C

ITEM	COMPONENT	MATERIAL	FINISH
1	INSERT	PUR	BLACK
2	CONTAC SOCKET	BRASS	GOLD OVER NICKEL
3	O-RING	VITON	---
4	RECEPTACLE SHELL	BRASS	NICKEL PLATED
5	HOUSING	PBT	YELLOW
6	LABEL	ABS	WHITE
7	LENS	PA	CLEAR
8	CABLE	PUR/PVC	---

<b>NEW RELEASE</b>	EC NO: WEU2010-0248	2010/01/08
DRWN:SBH	CHKD:APOHL WEU	2010/01/08
APPR:NSTAUDIGEL		2010/01/29
DESCRIPTION		
QUALITY SYMBOLS	▽=0	∇=0

	GENERAL TOLERANCES (UNLESS SPECIFIED)	
	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± ---	± ---
1 PLACE	± 0.3	± ---
ANGULAR ± ---°		

DRAFT WHERE APPLICABLE  
MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE	
MM ONLY	
DRAWN BY	DATE
SBH	2010/01/08
CHECKED BY	DATE
APOHL WEU	2010/01/08
APPROVED BY	DATE
NSTAUDIGEL	2010/01/29
MATERIAL NO.	
SEE TABLE	
SIZE	A3

SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	METRIC	
TITLE		
M8-MPIS 4 PORT CABLE 90 DEGREE 3 POL OUTLINE		
molex MOLEX INCORPORATED		
DOCUMENT NO.	SHEET NO.	
SD-120113-021	1 OF 1	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		