


Material:  
 Plug Housing: Polycarbonate, clear.  
 Plug Terminal: 0.36[.014] thick phosphor bronze.  
 Connector: Thick gold in localized gold plate.  
 Area, Gold flash over the remainder.  
 Over 2.54mm[.000100] thick nickel underplate.  
 Conductor: [26AWG(0.12x12) Bare Copper]x8C  
 Insulation: (PP6331 ID: 0.95-1.0)x8C  
 Jacket: PVC NOUL 80P  
 Package: Individual PE Bag.

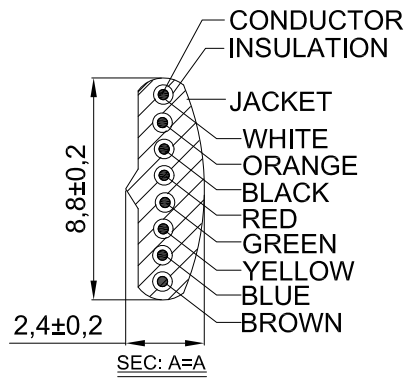

P1	COLOR
1	WHITE
2	ORANGE
3	BLACK
4	RED
5	GREEN
6	YELLOW
7	BLUE
8	BROWN

WSW P/N: AT-C-26-8/8/x-xx-OE

Order color:  
 B: Black  
 W: White  
 S: Silver

Length Code	Retracted Length(L3)	Extended Length(L2)	Cut Length(L1)
5	700±50	5.0FT-5.75FT	2900-3000
7	1000±50	7.0FT-8.05FT	4000-4200
10	1500±50	10.0FT-11.5FT	5900-6100
12	1650±50	12.0FT-13.8FT	7000-7200
14	1900±50	14.0FT-16.1FT	7600-7800
25	3200±50	25.0FT-28.75FT	14300-14500

RoHS compliant  
 Unit: mm

Scale	Free				Date	Name	Customer-No.	
TOLERANCE					Drawn	21.02.2019	Segal	ASSMANN WSW-No. <b>AT-C-26-8/8/x-xx-OE</b>
					Approved	21.02.2019	Segal	
DIM	TOL							Drawing-No.
								<b>ASS 8503 CA</b>
Angle	TOL	Id.	Modification	Date	Name	Replace		Sheet



Customer-No.	
ASSMANN WSW-No. <b>AT-C-26-8/8/x-xx-OE</b>	
Drawing-No.	rev00
Replace	Sheet