


T398M476K035AS7301

Aliases (T398M476K035ASTR)

T398, Tantalum, MnO2 Tantalum, Commercial Grade, 47 uF, 10%, 35 VDC, Radial, Solid Tantalum, Three Leaded, Lead Spacing = 2.54mm

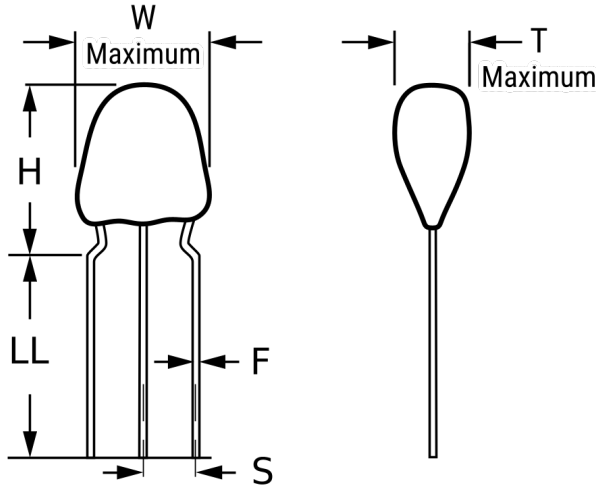

Click [here](#) for the 3D model.

Dimensions	
W	9.1mm
H	15.7mm
T	9.1mm
S	2.54mm +/-0.2mm
LL	4.75mm +/-1.27mm
F	0.5mm +/-0.05mm

Packaging Specifications	
Packaging	T&R, 305mm
Packaging Quantity	500

General Information	
Series	T398
Dielectric	MnO2 Tantalum
Style	Radial Three Lead
Description	Radial, Solid Tantalum, Three Leaded
RoHS	No
Prop 65	⚠ WARNING: Cancer and reproductive harm - http://www.p65warnings.ca.gov .
SCIP Number	78c25989-fc86-4b0d-a598-1bcecbae95c0
Termination	Lead (SnPb)
AEC-Q200	No
Construction	Conformal
Notes	Longest Lead Is Positive.

Specifications	
Capacitance	47 uF
Capacitance Tolerance	10%
Voltage DC	35 VDC (85C), 23 VDC (125C), 0.35 VDC (125C Reverse)
Temperature Range	-55/+125°C
Dissipation Factor	6%
Leakage Current	10 uA