


REVISIONS				
EC NO	DATE	REV	DESCRIPTION	CHANGER
NA	2018/09/13	A	INITIAL RELEASE	CISSY

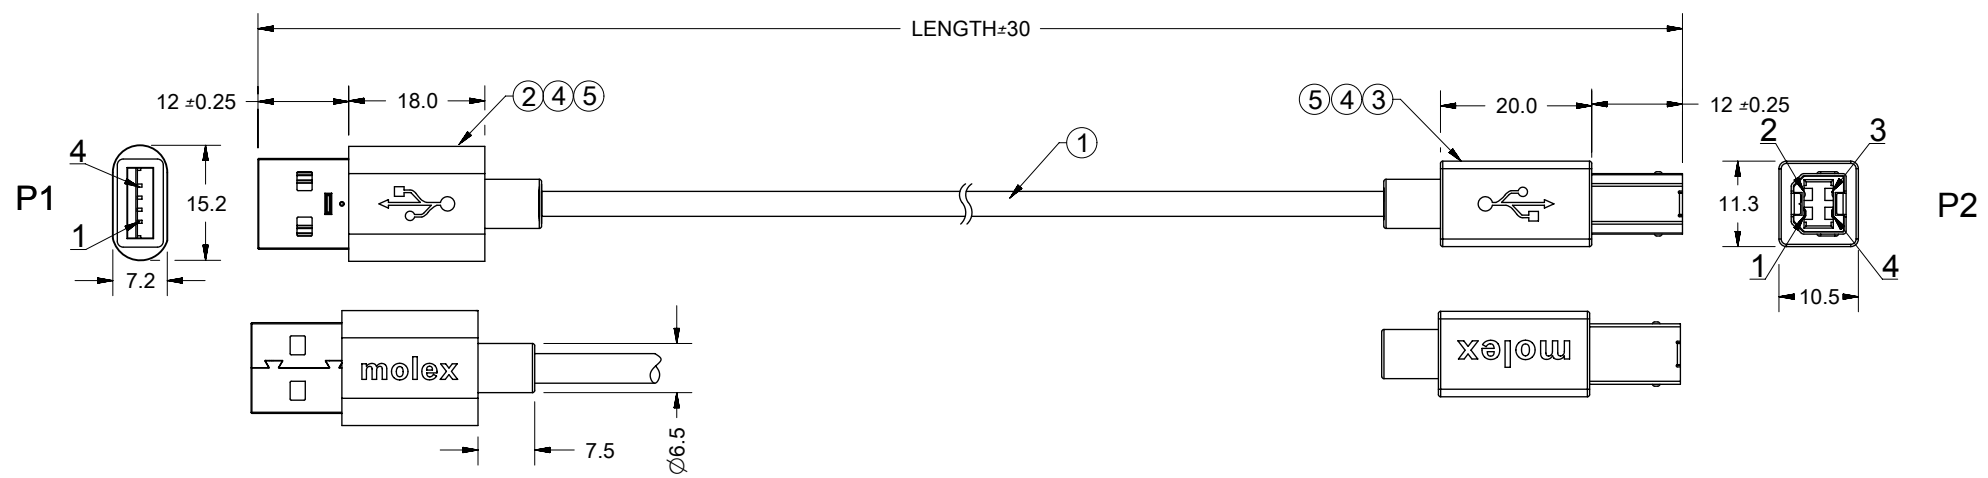

SHELL	BRAID WIRE	SHELL
4	BLACK	4
3	GREEN	3
2	WHITE	2
1	RED	1
P1	WIRE COLOR	P2
PIN ASSIGNMENTS		

PART NO.	LENGTH	DESCRIPTION
687680401	L=1000MM	USB2.0 A to USB2.0 B L=1M
687680402	L=1500MM	USB2.0 A to USB2.0 B L=1.5M
687680403	L=2000MM	USB2.0 A to USB2.0 B L=2M

ITEM	DESCRIPTION	QTY'
5	OUTMOLDED PVC BLACK	A/R
4	INNER MOLDED LDPE	A/R
3	USB B TYPE PLUG, CONTACTS: GOLD 1u" PLATED,SHELL: NICKEL PLATED,	1
2	USB A TYPE PLUG, CONTACTS: GOLD 1u" PLATED,SHELL: NICKEL PLATED,	1
1	USB CABLE 28AWG*1P+26AWG*2C+AEB JACKET BLACK	1

NOTE:

- OUTMOLDED WITH BLACK PVC RESIN
INNER MOLDER WITH PE RESIN
- ELECTRICAL PERFORMANCE:
 - 2.1 RATED CURRENT:1.0A
 - 2.2 RATED VOLTAGE:30V AC
 - 2.3 THIS PRODUCT MUST MEET USB 2.0 STANDARD.
- THIS PRODUCT MUST MEET THE EU RoHS CHEMICAL SUBSTANCES SPECIFICATION FOR PRODUCTS (2011/65/EU)
- APPLICATION CONDITION:
 - 4.1 WORKING CONDITION (TEMPERATURE:0°----+50°)
 - 4.2 STORE CONDITION (TEMPERATURE:-20°----+60°)

SYMBOLS = 0 = 0 = 0 = 0 = 0 = 0 = 0 = 0 = 0 = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION DIMENSION UNITS: mm SCALE: 1:1		CURRENT REV DESC: EC NO: 604448 DRWN: ZZXIAN 2018/09/13 CHK'D: CWANG49 2018/09/14 APPR: LHLIU 2018/09/14				
	GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± °		INITIAL REVISION: DRWN: ZZXIAN 2018/08/15 APPR: LHLIU 2018/09/14				
	4 PLACES ± 3 PLACES ± 2 PLACES ± 0.25 1 PLACE ± 0.5 0 PLACES ±		PRODUCT CUSTOMER DRAWING		DOCUMENT NUMBER: 2012410603 DOC TYPE: PSD DOC PART: 000 REVISION: A		
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING: A4-SIZE	SERIES: 201241	MATERIAL NUMBER: SEE TABLE	CUSTOMER: GENERAL MARKET

DOCUMENT STATUS	P1	RELEASE DATE	2018/09/14	09:50:21
-----------------	----	--------------	------------	----------