
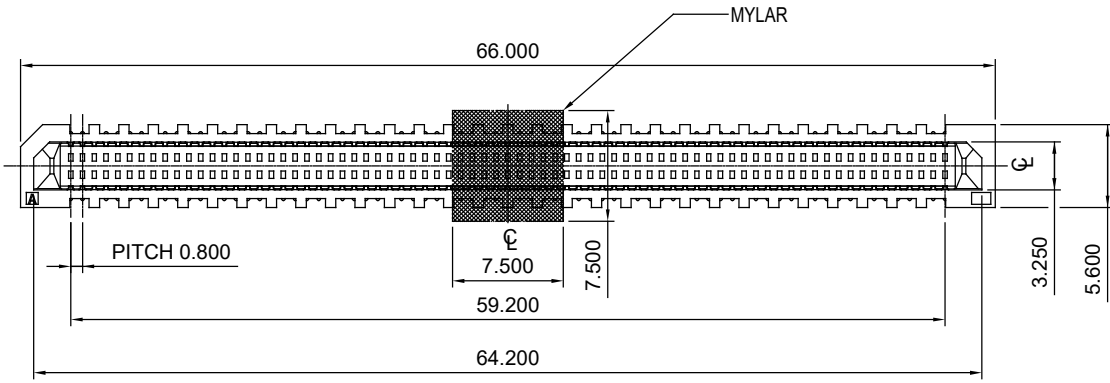


TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X	±0.25
.XX	±0.15
.XXX	±0.10

THIS IS A C.A.D. GENERATED DRAWING  
DO NOT MAKE MANUAL REVISIONS TO MASTER.






NOTES:


MATERIAL:  
MYLAR: PE MATERIAL (NO PLATING)  
HOUSING: L.C.P SERIES, UL-94V-0  
CONTACT: COPPER ALLOY  
10µ" GOLD PLATING ON CONTACT AREA  
MATTE TIN PLATING ON SOLDER TAIL OVER  
NICKEL UNDER PLATING

OPERATION TEMPERATURE: -55°C TO 85°C

ELECTRICAL:  
CURRENT RATING: 0.5A  
VOLTAGE RATING: 50V AC  
INSULATION RESISTANCE: 500MΩ MIN.  
CONTACT RESISTANCE: 50MΩ MAX.  
DIELECTRIC WITHSTANDING VOLTAGE: 150V AC / 60 SEC.

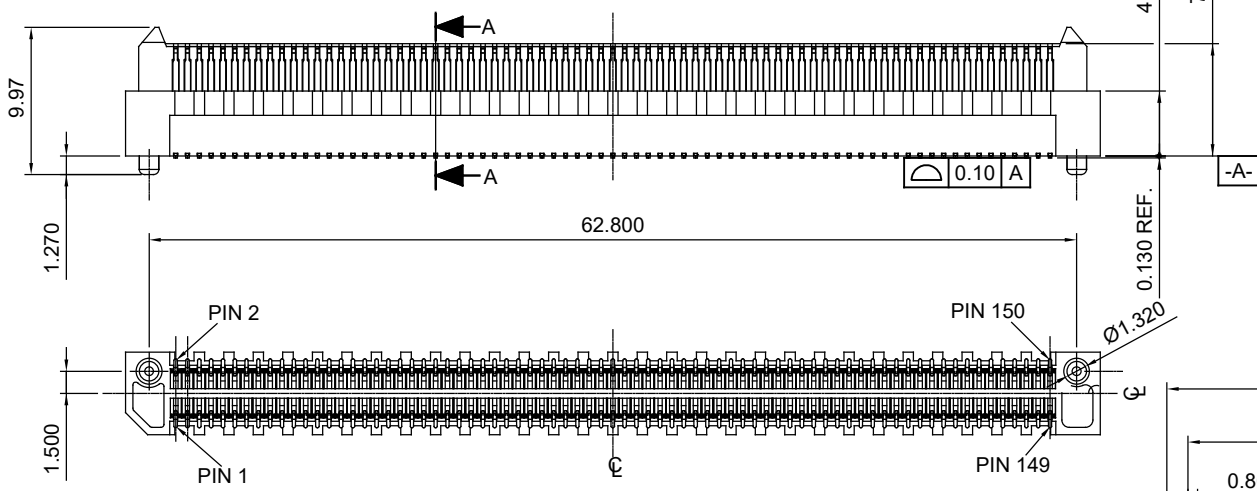

MARKED : CRITICAL DIMENSION  
MARKED DIMENSIONS NEED TO BE MEASURED IN CPK

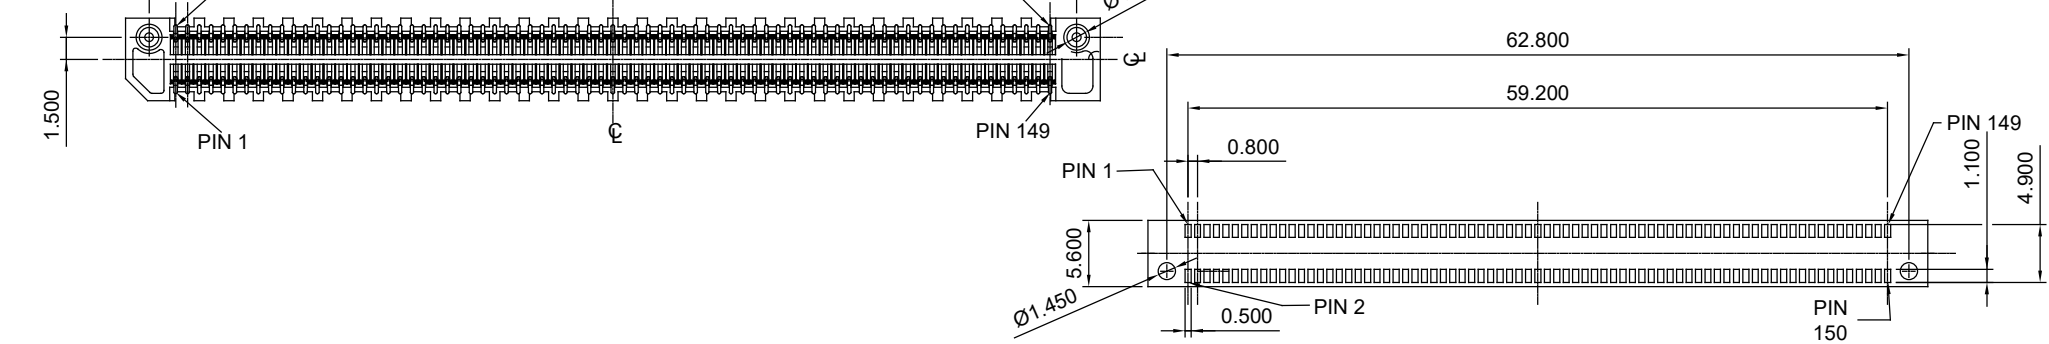

BOARD TO BOARD, 150 CONTACTS,  
SMT, ALL LONG PIN, MALE

ACAD REFERENCE NO.: 472-150-529-001	
DRAWN: W.T	DATE: JUNE.28 /2018
CHECKED:	DATE:
SCALE: N.T.S	SHEET 1 OF 1
DRAWING NUMBER: 472-150-529-001	ISSUE 1
PART NUMBER: 472-150-529-001	



THIS SERIES FULLY CONFORMS TO  
THE EUROPEAN UNION DIRECTIVES  
2011/65/EU FOR RoHS COMPLIANCY.



EDAC INC  
TORONTO, ONTARIO  
CANADA  
YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS  
ARE THE PROPERTY OF EDAC INC., AND  
SHALL NOT BE REPRODUCED, OR COPIED  
OR USED AS THE BASIS FOR THE  
MANUFACTURE OR SALE OF APPARATUS  
WITHOUT WRITTEN PERMISSION.