



# CQB150W SERIES 150 WATT 4:1 INPUT ISOLATED DC-DC CONVERTER

## Features

- Efficiency Up to 92%
- Fixed Switching Frequency
- Regulated Outputs
- Remote On/Off
- Low No Load Power Consumption
- Fully protected (OTP/OCP/OVP/UVLO)
- 2250Vdc I/O Isolation
- Operating Case Temperature -40 to +105°C
- Quarter Brick Size Meet Industrial Standard 2.28"x1.45"x0.5"
- CB Test Certificate IEC62368-1
- UL62368-1 Approval
- Meets EN50155 with External Circuits
- Shock & Vibration EN50155 (EN61373) Compliant
- Fire & Smoke EN45545-2 Compliant
- 3000m Operating Altitude



| MODEL NUMBER  | INPUT VOLTAGE | OUTPUT VOLTAGE | OUTPUT CURRENT |        | INPUT CURRENT |           | % EFF. |      | CAPACITOR LOAD MAX. |
|---------------|---------------|----------------|----------------|--------|---------------|-----------|--------|------|---------------------|
|               |               |                | MIN.           | MAX.   | NO LOAD       | FULL LOAD | (3)    | (2)  |                     |
| CQB150W-24S05 | 9-36 VDC      | 5 VDC          | 0 mA           | 30 A   | 10 mA         | 7.02 A    | 91     | 92   | 30000uF             |
| CQB150W-24S12 | 9-36 VDC      | 12 VDC         | 0 mA           | 12.5 A | 10 mA         | 7.02 A    | 91     | 92   | 12500µF             |
| CQB150W-24S15 | 9-36 VDC      | 15 VDC         | 0 mA           | 10 A   | 10 mA         | 7.02 A    | 91.5   | 91   | 10000µF             |
| CQB150W-24S24 | 9-36 VDC      | 24 VDC         | 0 mA           | 6.3 A  | 10 mA         | 7.08 A    | 89.5   | 89.5 | 6300uF              |
| CQB150W-24S28 | 9-36 VDC      | 28 VDC         | 0 mA           | 5.4 A  | 10 mA         | 7.08 A    | 90     | 90   | 5400uF              |
| CQB150W-24S48 | 9-36 VDC      | 48 VDC         | 0 mA           | 3.2 A  | 10 mA         | 7.19 A    | 90.5   | 90.5 | 1000uF              |
| CQB150W-48S05 | 18-75 VDC     | 5 VDC          | 0 mA           | 30 A   | 8 mA          | 3.47 A    | 92     | 92   | 30000uF             |
| CQB150W-48S12 | 18-75 VDC     | 12 VDC         | 0 mA           | 12.5 A | 8 mA          | 3.47 A    | 92     | 91   | 12500µF             |
| CQB150W-48S15 | 18-75 VDC     | 15 VDC         | 0 mA           | 10 A   | 8 mA          | 3.47 A    | 92     | 91   | 10000µF             |
| CQB150W-48S24 | 18-75 VDC     | 24 VDC         | 0 mA           | 6.3 A  | 8 mA          | 3.50 A    | 91     | 90.5 | 6300uF              |
| CQB150W-48S28 | 18-75 VDC     | 28 VDC         | 0 mA           | 5.4 A  | 8 mA          | 3.50 A    | 91.5   | 90.5 | 5400uF              |
| CQB150W-48S48 | 18-75 VDC     | 48 VDC         | 0 mA           | 3.2 A  | 8 mA          | 3.56 A    | 92     | 91.5 | 1000uF              |

NOTE:

1. Nominal Input Voltage 24, 48VDC
2. Measured at Nominal Input Voltage
3. Measured at 12VDC for 24Vin, 24VDC for 48Vin

## PART NUMBER

| Series   | Nominal Input Voltage    | Number of Outputs | Nominal Output Voltage   | Remote On/Off Logic           | Mounting Inserts  |
|----------|--------------------------|-------------------|--|-------------------------------|---|
| CQB150W- | II                       | O                 | XX   | L                             | -Y (Option)   |
| CQB150W  | 24: 24 VDC<br>48: 48 VDC | S: Single         | 05: 5.0VDC<br>12: 12VDC<br>15: 15 VDC<br>24: 24VDC<br>28: 28VDC<br>48: 48VDC | None: Positive<br>N: Negative | M3x0.5 Mounting<br>None: Inserts<br>-C: Clear Mounting Insert<br>(3.2mm DIA.) |

Part Number Example:

**CQB150W-48S12N-C:** Quarter Brick, 150W, 4:1 18-75Vdc Input, Single 12Vdc Output, Negative Logic, Clear Mounting Insert



# CQB150W Series

## TECHNICAL SPECIFICATIONS

(All specifications are typical at nominal input, full load at 25°C unless otherwise noted.)

### ABSOLUTE MAXIMUM RATINGS

| PARAMETER                     | NOTES and CONDITIONS                             | Device | Min. | Typ. | Max. | Units           |
|-------------------------------|--|--------|------|------|------|-----------------|
| Input Voltage                 | Continuous                                       | 24Vin  | -0.3 |      | 36   | V <sub>dc</sub> |
|                               |  | 48Vin  | -0.3 |      | 75   |                 |
| Input Surge Voltage           | 100ms max.                                       | 24Vin  |      |      | 50   | V <sub>dc</sub> |
|                               |  | 48Vin  |      |      | 100  |                 |
| Operating Ambient Temperature | At the center part of case plate (with derating) | All    | -40  |      | 105  | °C              |
| Maximum Case Temperature      |  | All    |      |      | 110  | °C              |
| Storage Temperature           |  | All    | -55  |      | 125  | °C              |

### INPUT CHARACTERISTICS

| PARAMETER                         | NOTES and CONDITIONS                         | Device                 | Min. | Typ. | Max. | Units            |
|-----------------------------------|--|------------------------|------|------|------|------------------|
| Operating Input Voltage           |  | 24Vin                  | 9    | 24   | 36   | V <sub>dc</sub>  |
|                                   |  | 48Vin                  | 18   | 48   | 75   |                  |
| Input Under Voltage Lockout       |  |                        |      |      |      |                  |
| Turn-On Voltage Threshold         |  | 24Vin                  | 8    | 8.5  | 8.8  | V <sub>dc</sub>  |
|                                   |  | 48Vin                  | 16.5 | 17   | 17.5 |                  |
| Turn-Off Voltage Threshold        |  | 24Vin                  | 7.7  | 8    | 8.3  | V <sub>dc</sub>  |
|                                   |  | 48Vin                  | 15.5 | 16   | 16.5 |                  |
| Lockout Hysteresis Voltage        |  | 24Vin                  |      | 0.6  |      | V <sub>dc</sub>  |
|                                   |  | 48Vin                  |      | 0.9  |      |                  |
| Maximum Input Current             | V <sub>in</sub> =9V, Full load.              | 24Vin                  |      | 20   |      | A                |
|                                   | V <sub>in</sub> =18V, Full load              | 48Vin                  |      | 10   |      |                  |
| No-Load Input Current             | V <sub>in</sub> =24, 48V, I <sub>o</sub> =0A | See Model Number Table |      |      |      | mA               |
| Input Filter                      | Pi filter                                    | All                    |      |      |      |                  |
| Inrush Current (I <sup>2</sup> t) | As per ETS300 132-2.                         | All                    |      |      | 0.1  | A <sup>2</sup> s |
| Input Reflected Ripple Current    | P-P thru 12uH inductor, 5Hz to 20MHz         | All                    |      | 30   |      | mA               |

### OUTPUT CHARACTERISTICS

| PARAMETER  | NOTES and CONDITIONS  | Device           | Min. | Typ. | Max.  | Units |
|--|---|------------------|------|------|-------|-------|
| Voltage Set Point Accuracy                               | V <sub>in</sub> =24, 48V, Full Load, T <sub>c</sub> =25°C   | All              | -1.0 |      | +1.0  | %     |
| Output Voltage Regulation                                |   |                  |      |      |       |       |
| Load Regulation  | Full Load to no load  | All              |      |      | ±0.2  | %     |
| Line Regulation  | V <sub>in</sub> =High line to low line, full load   | All              |      |      | ±0.2  | %     |
| Temperature Coefficient                                  | T <sub>c</sub> =-40°C to 105°C  | All              |      |      | ±0.02 | %/°C  |
| Output Voltage Ripple and Noise (5Hz to 20MHz bandwidth) |   |                  |      |      |       |       |
| Peak-to-Peak   | Full load, 10uF tantalum and 1.0uF ceramic capacitors (for V <sub>o</sub> : 48V: Full load 10uF aluminum and 1uF ceramic) | 5V <sub>o</sub>  |      |      | 100   | mV    |
|  |   | 12V <sub>o</sub> |      |      | 150   |       |
|  |   | 15V <sub>o</sub> |      |      | 150   |       |
|  |   | 48V <sub>o</sub> |      |      | 480   |       |
|  |   | Others           |      |      | 280   |       |
| RMS  |   | 5V <sub>o</sub>  |      |      | 40    |       |
|  |   | 12V <sub>o</sub> |      |      | 60    |       |
|  |   | 15V <sub>o</sub> |      |      | 60    |       |
|  |   | 48V <sub>o</sub> |      |      | 200   |       |
|  |   | Others           |      |      | 100   |       |



# CQB150W Series

| PARAMETER                 | NOTES and CONDITIONS                                      | Device                 | Min.                       | Typ. | Max.       | Units |
|---------------------------|---|------------------------|----------------------------|------|------------|-------|
| Output Current Range      | $V_{in}= 9$ to 36V, 18 to 75V                             | See Model Number Table |                            |      |            | A     |
| Over Current Protection   | Hiccup mode. Auto recovery                                | All                    | 110                        | 125  | 160        | %     |
| Over Voltage Protection   | Limited voltage   | All                    | 110                        | 125  | 140        | %     |
| Short Circuit Protection  |   | All                    | Continuous, Auto Recovery. |      |            |       |
| External Load Capacitance | Full load (resistive)                                     | See Model Number Table |                            |      |            | uF    |
| Output Voltage Trim Range | $P_o \leq \text{max rated power}$ , $I_o \leq I_{o\_max}$ | 15Vo<br>Other          | -20<br>-10                 |      | +10<br>+10 | %     |

## EFFICIENCY

| PARAMETER | NOTES and CONDITIONS | Device                 | Min. | Typ. | Max. | Units |
|-----------|----------------------|------------------------|------|------|------|-------|
| 100% Load | $V_{in}=24V$ , 48V   | See Model Number Table |      |      |      | %     |

## DYNAMIC CHARACTERISTICS

| PARAMETER                               | NOTES and CONDITIONS  | Device | Min. | Typ. | Max.    | Units |
|---|---|--------|------|------|---------|-------|
| Output Voltage Current Transient        |   |        |      |      |         |       |
| Error Band                              | 75% to 100% of $I_{o\_max}$ step load change<br>$dI/dt=0.1A/us$ | All    |      |      | $\pm 5$ | %     |
| Recovery Time                           | (within 1% $V_{out}$ nominal)                                   | All    |      |      | 250     | us    |
| Turn-On Delay and Rise Time             |   |        |      |      |         |       |
| Turn-On Delay Time, From On/Off Control | Full load (Constant resistive load)                             |        |      |      |         |       |
| Turn-On Delay Time, From On/Off Control | $V_{on/off}$ to 10% $V_{o\_set}$ , Remote on                    | All    |      | 30   |         | ms    |
| Turn-On Delay Time, From Input          | $V_{in\_min}$ to 10% $V_{o\_set}$ , Power up                    | All    |      | 30   |         | ms    |
| Output Voltage Rise Time                | 10% $V_{o\_set}$ to 90% $V_{o\_set}$                            | All    |      | 30   |         | ms    |

## ISOLATION CHARACTERISTICS

| PARAMETER  | NOTES and CONDITIONS  | Device | Min. | Typ.             | Max.                 | Units      |
|--|---|--------|------|------------------|----------------------|------------|
| Isolation Voltage<br>(100% factory Hi-Pot tested @2sec.) | 1 minute; Input to output,<br>1 minute; Input to case<br>1 minute; Output to case | All    |      |                  | 2250<br>2250<br>2250 | $V_{dc}$   |
| Isolation Resistance                                     | Input to output   | All    | 100  |                  |                      | M $\Omega$ |
| Isolation Capacitance                                    | Input to output<br>Input to case<br>Output to case                                | All    |      | 1500<br>NC<br>NC |                      | pF         |

## FEATURE CHARACTERISTICS

| PARAMETER   | NOTES and CONDITIONS                                 | Device          | Min.       | Typ.       | Max.       | Units       |
|---|--|-----------------|------------|------------|------------|-------------|
| Switching Frequency   | Pulse wide modulation (PWM), Fixed                   | 48S12<br>Others | 260<br>270 | 285<br>300 | 320<br>330 | KHz         |
| On/Off Control, Positive Remote On/Off logic, Refer to $-V_{in}$ pin. |  |                 |            |            |            |             |
| Logic Low (Module Off)  | $V_{on/off}$ at $I_{on/off}=1.0mA$                   | All             | 0          |            | 1.2        | V           |
| Logic High (Module On)  | $V_{on/off}$ at $I_{on/off}=0.0uA$ , Pin open=On     | All             | 3.5        |            | 75         | V           |
| On/Off Control, Negative Remote On/Off logic, Refer to $-V_{in}$ pin  |  |                 |            |            |            |             |
| Logic High (Module Off)   | $V_{on/off}$ at $I_{on/off}=0.0uA$ , Pin open=Off    | All             | 3.5        |            | 75         | V           |
| Logic Low (Module On)   | $V_{on/off}$ at $I_{on/off}=1.0mA$                   | All             | 0          |            | 1.2        | V           |
| On/Off Current (for both remote on/off logic)                         | $I_{on/off}$ at $V_{on/off}=0V$                      | All             |            | 0.3        | 1          | mA          |
| Leakage Current (for both remote on/off logic)                        | Logic High, $V_{on/off}=15V$                         | All             |            |            | 30         | uA          |
| Off Converter Input Current   | Shutdown input idle current                          | All             |            | 5          | 10         | mA          |
| Over Temperature Shutdown   | Temperature at the center part of case, non-latching | All             |            | 110        |            | $^{\circ}C$ |
| Over Temperature Recovery   |  | All             |            | 100        |            | $^{\circ}C$ |



# CQB150W Series

## GENERAL SPECIFICATIONS

| PARAMETER                       | NOTES and CONDITIONS  | Device | Min.                                     | Typ. | Max. | Units            |
|---------------------------------|---|--------|--|------|------|------------------|
| MTBF                            | I <sub>o</sub> =100% of I <sub>o,max</sub> ;<br>MIL-HDBK - 217F_Notice 1, GB, 25°C  | 05Vo   |  | 309  |      | K<br>hours       |
|                                 |   | 12Vo   |  | 331  |      |                  |
|                                 |   | 15Vo   |  | 354  |      |                  |
|                                 |   | 24Vo   |  | 563  |      |                  |
|                                 |   | 28Vo   |  | 560  |      |                  |
|                                 |   | 48Vo   |  | 667  |      |                  |
| Weight                          |   | All    |  | 68   |      | grams            |
| Case Material                   | Plastic, DAP, UL 94V-0  |        |  |      |      |                  |
| Base plate Material             | Aluminum  |        |  |      |      |                  |
| Potting Material                | UL 94V-0  |        |  |      |      |                  |
| Pin Material                    | Base: Copper<br>Plating: Nickel with Matte Tin                                      |        |  |      |      |                  |
| Shock/Vibration                 | MIL-STD-810F/EN61373 Compliant  |        |  |      |      |                  |
| Humidity                        | 95% RH max. Non Condensing  |        |  |      |      |                  |
| Altitude                        | 3000m Operating Altitude, 12000m Transport Altitude                                 |        |  |      |      |                  |
| Thermal Shock                   | MIL-STD-810F  |        |  |      |      |                  |
| Fire & Smoke                    | EN45545-2 Compliant   |        |  |      |      |                  |
| EMI                             | Meets EN55032 & EN50155 Compliant (with external filter)                            |        |  |      |      | Class A          |
| ESD                             | EN61000-4-2 Level 3: Air ±8kV, Contact ±6kV   |        |  |      |      | Perf. Criteria A |
| Radiated immunity               | EN61000-4-3 Level 3: 80~1000MHz, 20V/m  |        |  |      |      | Perf. Criteria A |
| Fast Transient                  | EN61000-4-4 Level 3: On power input port, ±2kV, external input capacitor required   |        |  |      |      | Perf. Criteria A |
| Surge                           | EN61000-4-5 Level 4: Line to earth, ±4kV, Line to line, ±2kV                        |        |  |      |      | Perf. Criteria A |
| Conducted immunity              | EN61000-4-6 Level 3: 0.15~80MHz, 10V  |        |  |      |      | Perf. Criteria A |
| Interruptions of Voltage Supply | EN50155 Class S3: 20ms interruptions, external input capacitor required             |        |  |      |      | Perf. Criteria A |
| Supply Change Over              | EN50155 Class C2: During a supply break of 30 ms, external input capacitor required |        |  |      |      | Perf. Criteria A |
| Application Note Link           |   |        | <a href="#">CQB150W Series App Notes</a> |      |      |                  |
| Packaging Information Link      |   |        | <a href="#">Packaging Information</a>    |      |      |                  |

## Immunity to Environmental Conditions.

| Phenomenon  | EN50155; 2017 Reference Clause(s) | Reference Standard | Test Conditions  | Result |
|---|-----------------------------------|--------------------|--|--------|
| Low Temperature Start-up test                                 | 13.4.4                            | EN 60068-2-1       | Class OT6<br>Temperature: -40°C<br>Duration: 2 hrs   | Pass   |
| Dry Heat Test   | 13.4.5                            | EN 60068-2-2       | Class OT6 & ST2<br>Temperature: 85°C<br>Duration: 6 hrs<br>Extended temperature: 100°C<br>Extended Duration: 10min   | Pass   |
| Low Temperature Storage Test                                  | 13.4.6                            | EN 60068-2-1       | Temperature: -40°C<br>Duration: 16 hrs   | Pass   |
| Cyclic Damp Heat Test   | 13.4.7                            | EN 60068-2-30      | Temperature: 25°C - 55°C<br>Humidity: 90% RH<br>Duration: 48 hrs   | Pass   |
| Random Vibration Test   | 13.4.11                           | EN 61373           | Temperature: 25°C +/- 10°C<br>Humidity: 50% +/-25% RH<br>Frequency range: 5 ~ 150 Hz<br>Vertical: 1.01 m/s <sup>2</sup><br>Transverse: 0.450 m/s <sup>2</sup><br>Longitudinal: 0.700 m/s <sup>2</sup><br>Duration: 10 min / axis | Pass   |
| Simulated Long Life Test at Increased Random Vibration Levels | 13.4.11                           | EN 61373           | Temperature: 25°C +/-10°C<br>Humidity: 50% +/-25% RH<br>Frequency range: 5 ~ 150 Hz<br>Vertical: 5.72 m/s <sup>2</sup><br>Transverse: 2.55 m/s <sup>2</sup><br>Longitudinal: 3.96 m/s <sup>2</sup><br>Duration: 5 hrs / axis     | Pass   |



# CQB150W Series

| Phenomenon | EN50155; 2017 Reference Clause(s) | Reference Standard | Test Conditions  | Result |
|------------|-----------------------------------|--------------------|--|--------|
| Shock Test | 13.4.11                           | EN 61373           | Temperature: 25°C +/-10°C<br>Humidity: 50% +/-25% RH<br>Frequency range: 5 ~ 150 Hz<br>+/-Vertical: 30 m/s <sup>2</sup><br>+/-Transverse: 30 m/s <sup>2</sup><br>+/-Longitudinal: 50 m/s <sup>2</sup><br>Duration: 30ms x18 (Each axis 3 shocks) | Pass   |


## EN45545-2 Fire & Smoke Test Conditions.

| Item | Standard  | Hazard Level  |
|------|---|---------------|
| R22  | Oxygen Index Test<br>EN 45545-2: 2013<br>EN ISO 4589-2: 2006    | HL1, HL2, HL3 |
|      | Smoke Density Test<br>EN 45545-2: 2013<br>EN ISO 5659-2: 2013   | HL1, HL2      |
|      | Smoke Toxicity Test<br>EN 45545-2: 2013<br>NF X70-100: 2006     | HL1, HL2, HL3 |
| R23  | Oxygen Index Test<br>EN 45545-2: 2013<br>EN ISO 4589-2: 2006    | HL1, HL2, HL3 |
|      | Smoke Density Test<br>EN 45545-2: 2013<br>EN ISO 5659-2: 2013   | HL1, HL2, HL3 |
|      | Smoke Toxicity Test<br>EN 45545-2: 2013<br>NF X70-100: 2006     | HL1, HL2, HL3 |
| R24  | Oxygen Index Test<br>EN45545-2: 2013<br>EN ISO 4589-2           | HL1, HL2, HL3 |
| R25  | Glow - Wire Test<br>EN 45545-2:2013<br>EN 60695-2-11:2001       | HL1, HL2, HL3 |
| R26  | Vertical Flame Test<br>EN 45545-2: 2013<br>EN 60695-11-10: 2013 | HL1, HL2, HL3 |


## CHARACTERISTIC CURVE

### Power Derating Curve


**CQB150W Derating Curve without Heatsink**

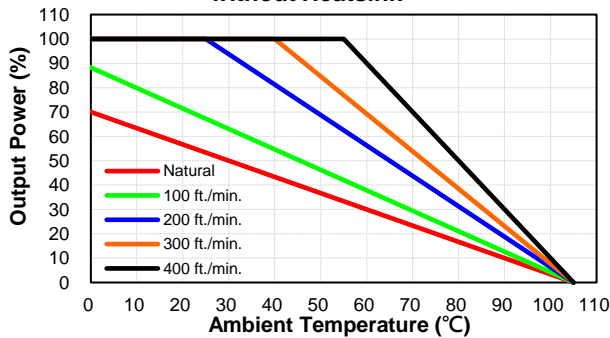

**CQB150W Derating Curve with Heatsink QBL127**

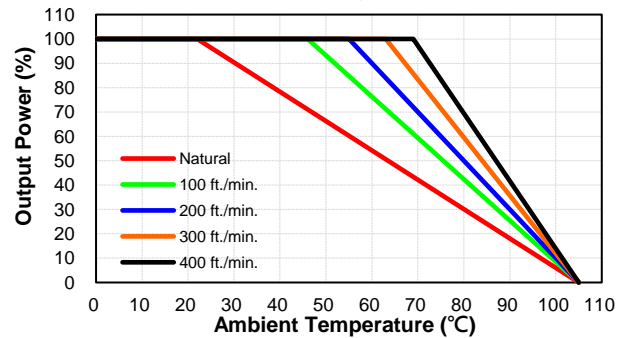

**CQB150W Derating Curve with Heatsink QBT210**

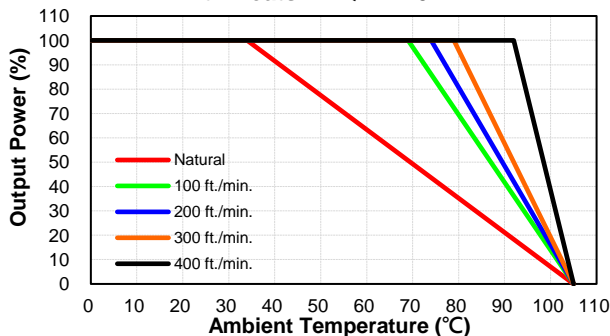





# CQB150W Series

## Performance Data


**CQB150W-24S05**  
Eff Vs Io @25 Deg. C

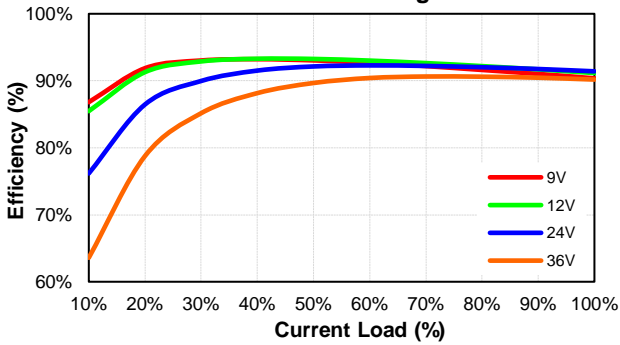


**CQB150W-24S05**  
Pd Vs Po @25 Deg. C

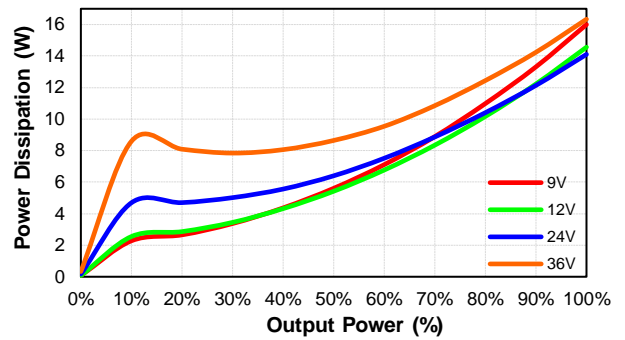


**CQB150W-24S12**  
Eff Vs Io @25 Deg. C

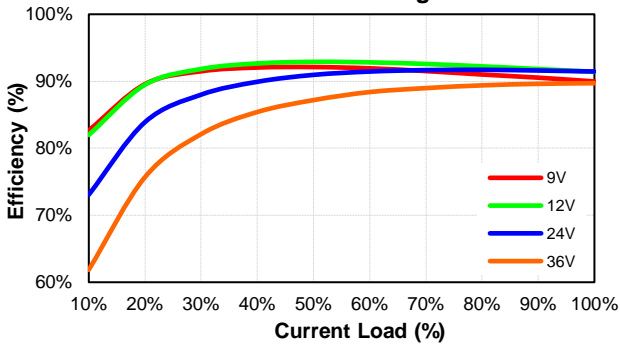


**CQB150W-24S12**  
Pd Vs Po @25 Deg. C

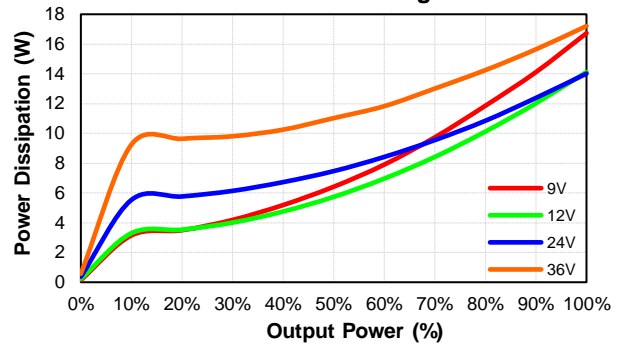


**CQB150W-24S15**  
Eff Vs Io @25 Deg. C

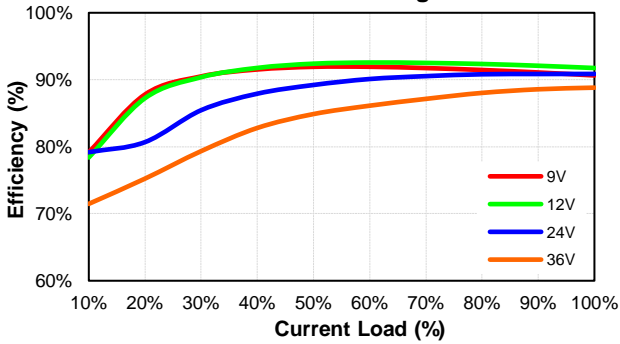


**CQB150W-24S15**  
Pd Vs Po @25 Deg. C

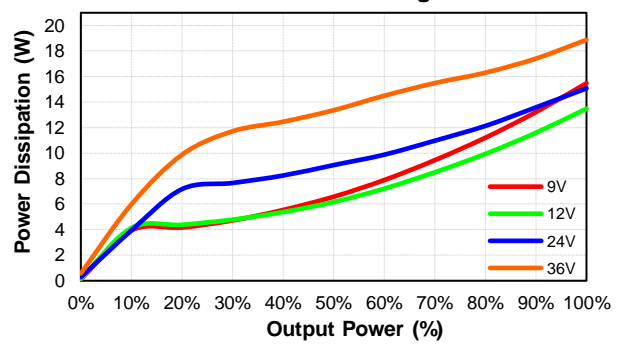

**CQB150W-24S24**  
Eff Vs Io @25 Deg. C

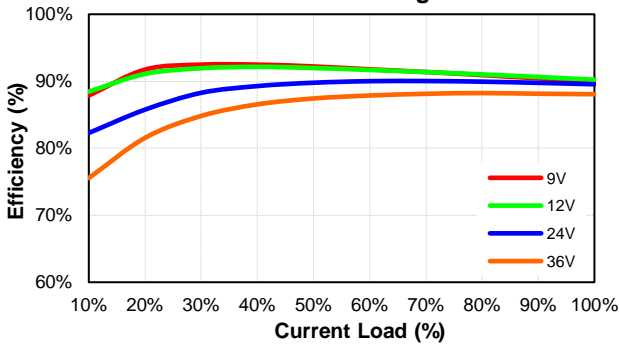


**CQB150W-24S24**  
Pd Vs Po @25 Deg. C

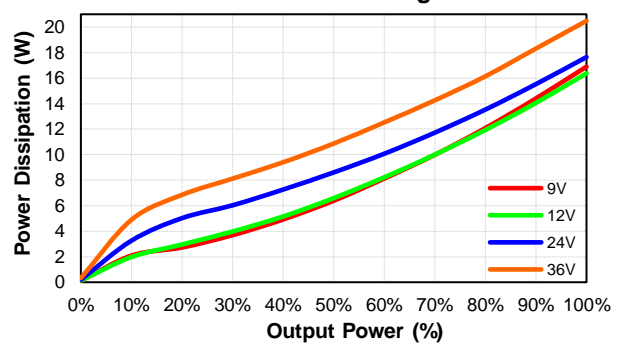




# CQB150W Series


**CQB150W-24S28**  
Eff Vs Io @25 Deg. C

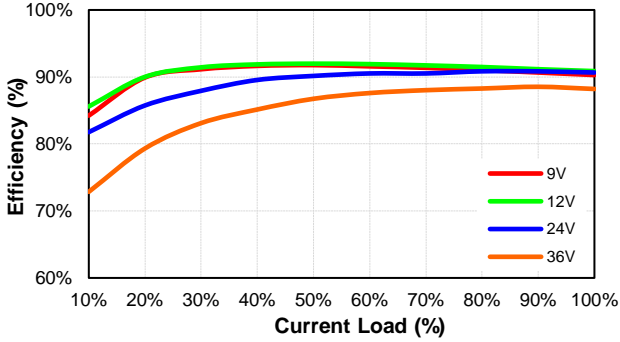


**CQB150W-24S28**  
Pd Vs Po @25 Deg. C

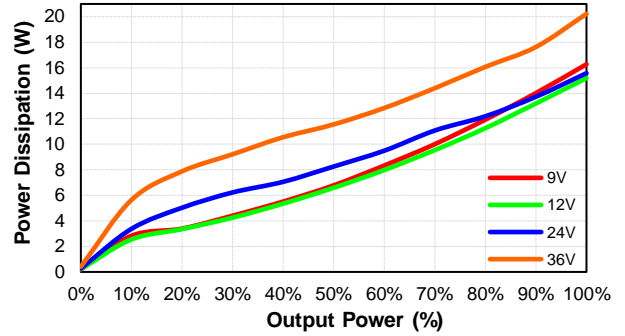


**CQB150W-24S48**  
Eff Vs Io @25 Deg. C

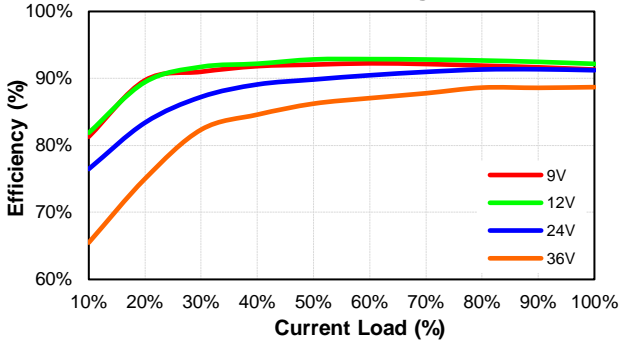


**CQB150W-24S48**  
Pd Vs Po @25 Deg. C

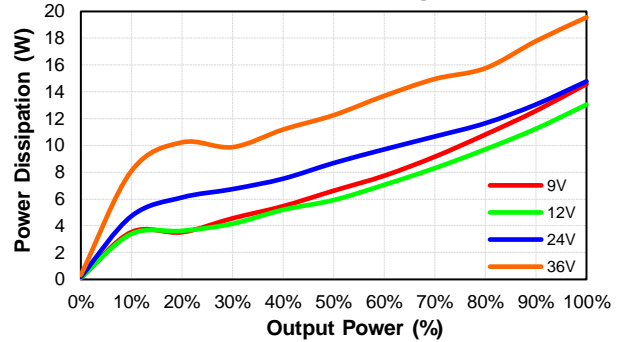


**CQB150W-48S05**  
Eff Vs Io @25 Deg. C

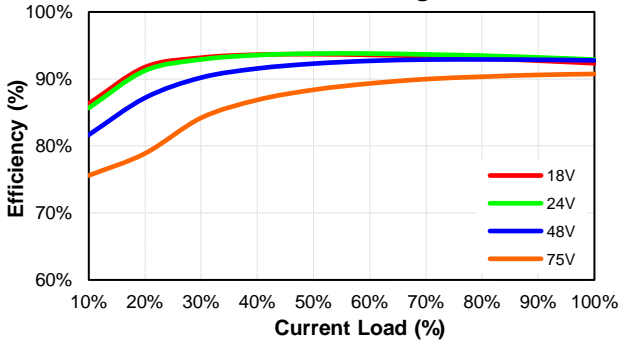


**CQB150W-48S05**  
Pd Vs Po @25 Deg. C

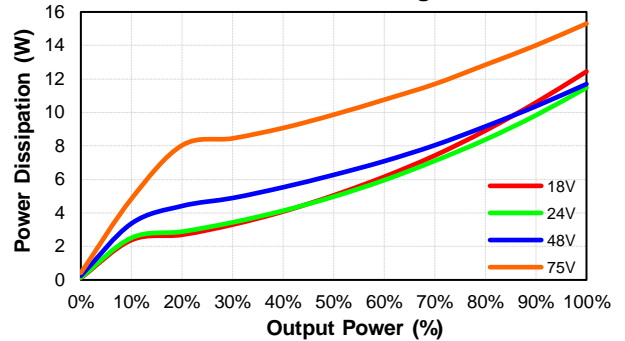

**CQB150W-48S12**  
Eff Vs Io @25 Deg. C

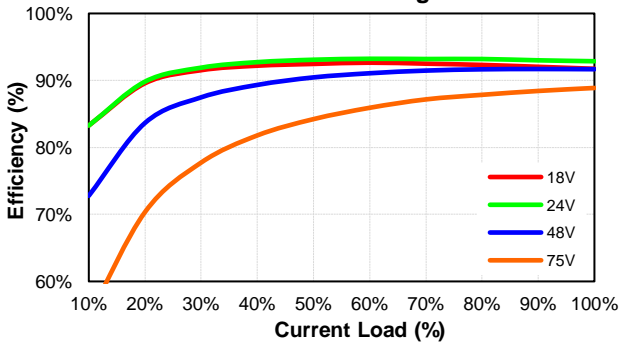

**CQB150W-48S12**  
Pd Vs Po @25 Deg. C

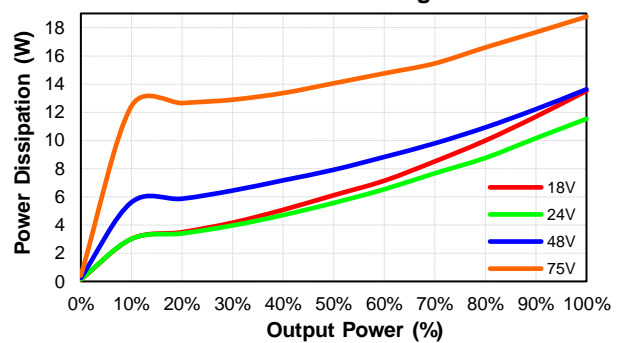







# CQB150W Series


**CQB150W-48S15**  
Eff Vs Io @25 Deg. C

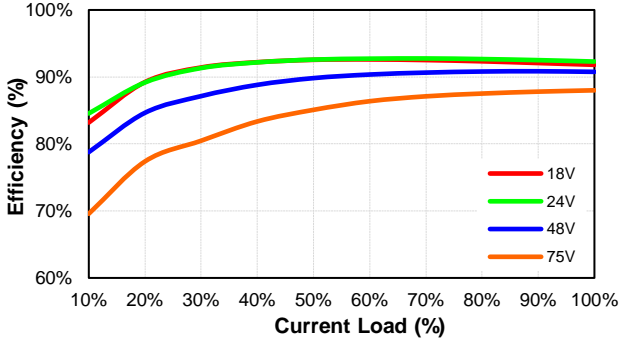


**CQB150W-48S15**  
Pd Vs Po @25 Deg. C

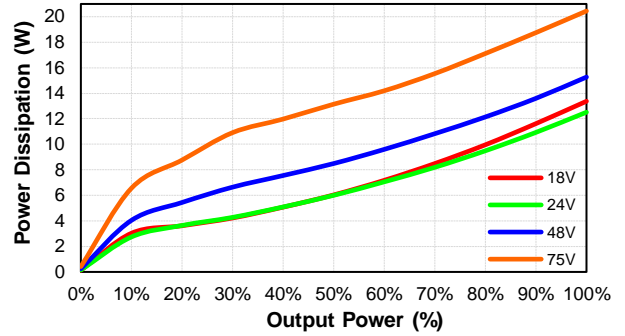


**CQB150W-48S24**  
Eff Vs Io @25 Deg. C

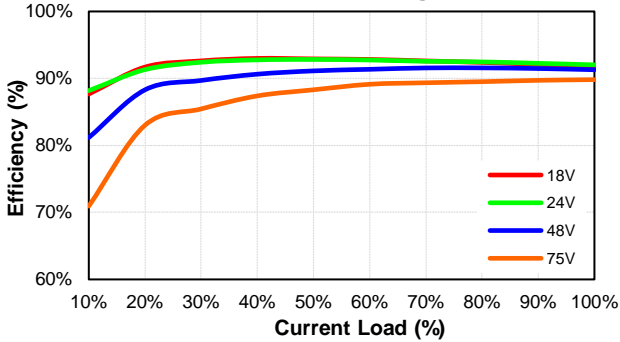


**CQB150W-48S24**  
Pd Vs Po @25 Deg. C

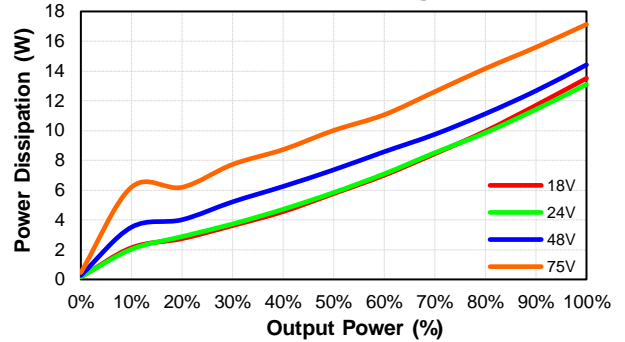


**CQB150W-48S28**  
Eff Vs Io @25 Deg. C

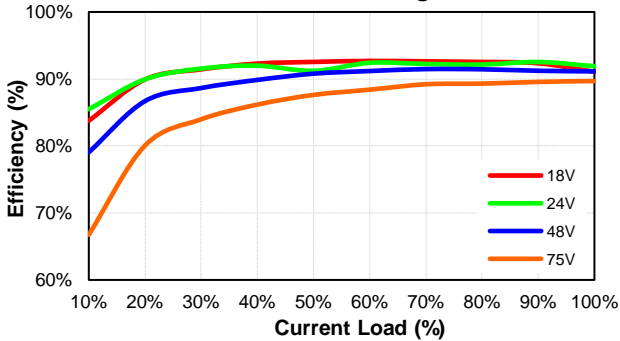


**CQB150W-48S28**  
Pd Vs Po @25 Deg. C

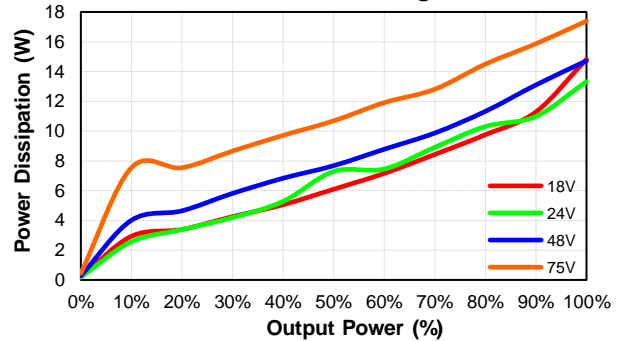

**CQB150W-48S48**  
Eff Vs Io @25 Deg. C

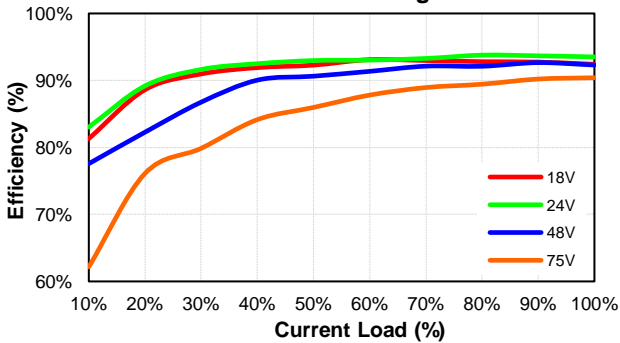

**CQB150W-48S48**  
Pd Vs Po @25 Deg. C

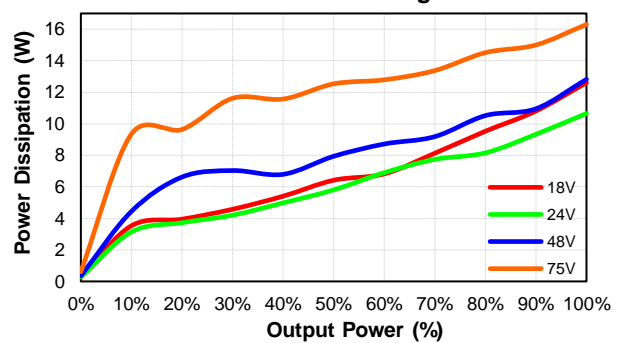






# CQB150W Series

## MECHANICAL SPECIFICATION

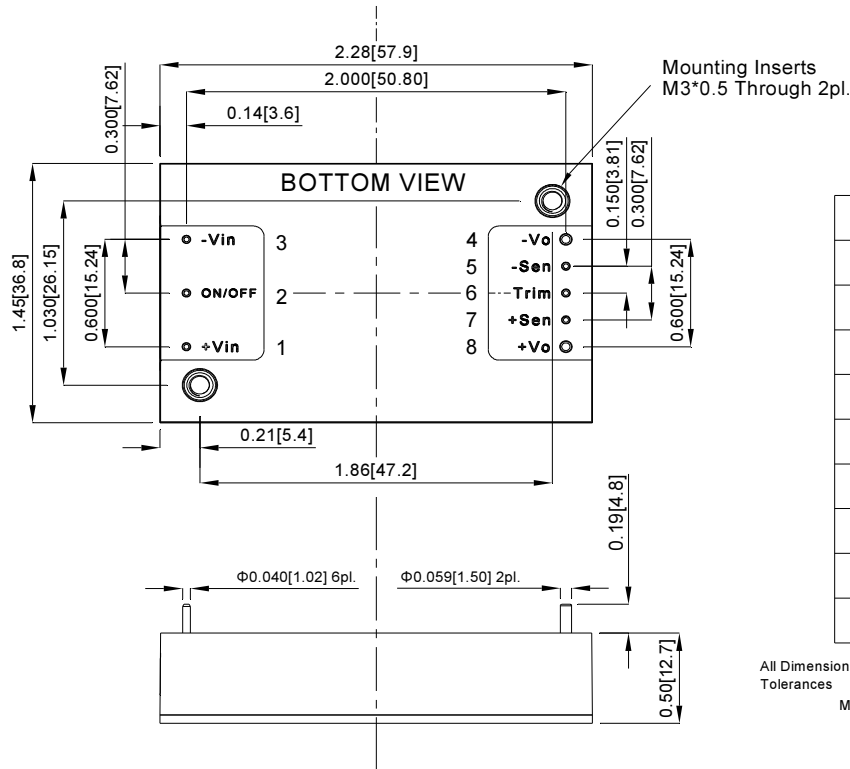

| PIN CONNECTION |           |
|----------------|-----------|
| PIN            | Function  |
| 1              | +V Input  |
| 2              | On/Off    |
| 3              | -V Input  |
| 4              | -V Output |
| 5              | -Sense    |
| 6              | Trim      |
| 7              | +Sense    |
| 8              | +V Output |

All Dimensions In Inches(mm)  
 Tolerances Inches: X.XX=  $\pm 0.02$ , X.XXX=  $\pm 0.010$   
 Millimeters: X.X=  $\pm 0.5$ , X.XX=  $\pm 0.25$

CINCON Electronics Co. Ltd.  
 Add: 14F, No. 306, Sec.4, Hsin Yi Rd., Taipei, Taiwan  
 Tel: 886-2-27086210  
 Fax: 886-2-27029852  
 E-mail: [sales@cincon.com.tw](mailto:sales@cincon.com.tw)  
 Web: [www.cincon.com](http://www.cincon.com)