

## SUMMARY

### # Wires

Low voltage 114



*Image is for illustrative purpose only*

Series 5M  
Termination type Male crimp  
IP rating 68  
AWG wire size 26.00 - 22.00  
Cable Ø 14.25 - 28.50 mm  
Status active  
Matching parts [EGR.5M.114.XLM](#)

### Download

[Request a quote](#)  
[Eplan](#)  
[Catalog](#)

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model FG\*: Straight plug with arctic grip and mold stop  
Keying 5 keys (alpha=105, beta=115, gamma=30, delta=20, plug: male contacts, receptacle: female contacts)  
Housing Material Aluminium (nickel plated [SAE AMS QQ N 290], anthracite color) shell and nut, other pieces bronze/brass  
Weight 49.95 g

### Performance

Configuration 5M.114 : 114 Low Voltage  
Insulator L: PEEK  
Rated Current 2 Amps

### Specifications

Test voltage (kV rms) Contact-contact: 1.37  
Test voltage (kV rms) Contact-shell: 1.34


### Others

Temp (min / max): -20° C / +200° C  
Humidity (max): 21 days at 95%

*LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*

Gunfire vibration: 25 Hz - 2000 Hz, 3 axis (Apache helicopter)  
 Vibration-Sine: 30 g, 3 axes, 12 hr [10 Hz - 2000 Hz]  
 Vibration-Random: 37.8 g rms - 3 axes, 4 hr amb [50 Hz - 2000 Hz]  
 Shock Resistance: 300 g [ 3 ms]  
 Lighting strike EIA 364-75: 10K amps - 6 times  
 Thermal shock: 5 cycles: -65 °C to +150 °C  
 EMI Shielding EIA 364-66A: >= 80 dB (1 GHz), >=70 dB (3 GHz), >= 58 dB (6 GHz), >= 40 dB (10 GHz)  
 Salt Spray Corrosion: max. 48 hr

## DRAWINGS

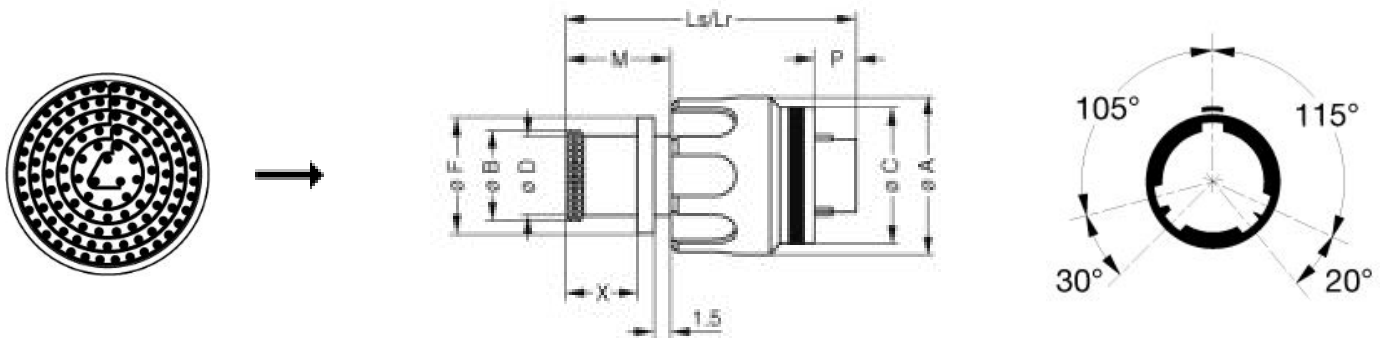

### Dimensions

	A	B	C	D	F	Lr	Ls	M	P	X
mm.	34.9	29.7	33.5	28.5	31.4	31.6	31.6	10.6	3.4	7.6
in.	1,37	1,17	1,32	1,12	1,24	1,24	1,24	0,42	0,13	0,30

## RECOMMENDED BY LEMO

### Tools

Crimp Tool: [DPC.91.701.V](#)  
 Crimp settings: AWG/Selector = 22-24-26/6-5-5  
 Positionner: [DCE.91.070.5MVC](#)  
 Extractor: [DCF.93.070.4LT](#)

*LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*

Replacement contact: FGN.0M.555.ZZC

## Cables

*LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*