


THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER. .X ±0.25 .XX ±0.13

.XXX ±0.05



ISSUE NUMBER	
ORIGINAL	

(1)



NOTES:

11.94 6 6 0 O

MATERIAL:	
HOUSING:	
SHELL:	
CONTACT:	


THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED

OPERATING TEMPERATURE:

POWER/CO-AX CONTACT RATING: 20A (CURRENT) (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX.

INSULATOR RESISTANCE: DIELECTRIC WITHSTANDING VOLTAGE:


1000V AC rms

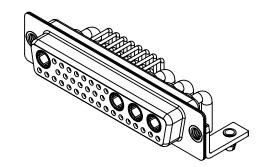

ſ		SW REFERENCE NO.: 630 COMBO ASSEMBLY			
			DRAWN: C.B	DATE: JAN. 01/2019	
			CHECKED:	DATE:	
	EDAC INC	ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
	TORONTO, ONTARIO CANADA		DRAWING NUMBER: 630-36W4240-2TB		ISSUE
	VOUD CONNECTION TO OUALITY & SEDVICE		PART NUMBER: 630-36W4	4240-2TB	1

-55°C ~ 125°C

5000MΩ min.

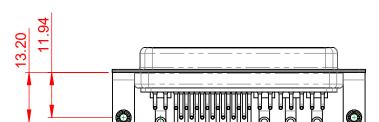



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

