




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2020-01-17	Allen Pan	Rev.03 To Rev.A

AX - XX B M M B - Q L 8 A P 0

AU(2A)
AD(5A)

02: 2Pin
03: 3Pin
04: 4Pin
05: 5Pin
06: 6Pin
08: 8Pin

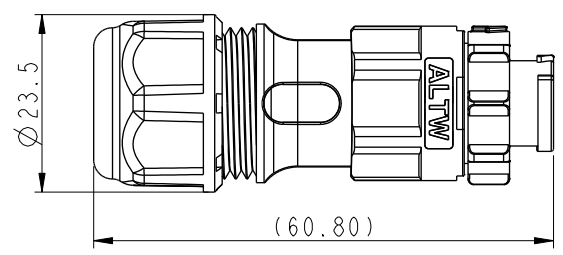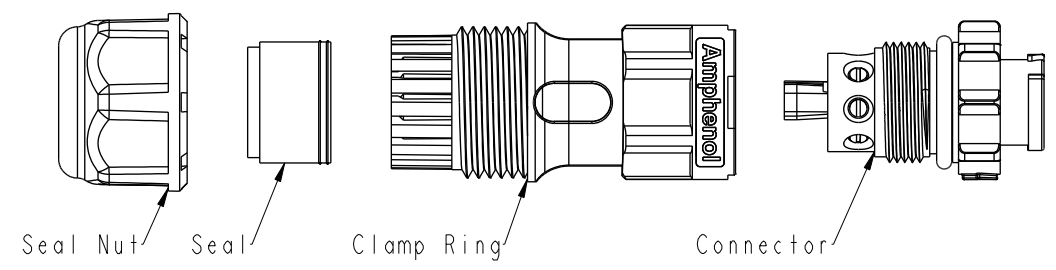

Note:

- * IP: IP68 (Mated)
- * Connector: Thermoplastic, Black.
- * Pin: Copper Alloy, Gold Plated.
- * Clamp Ring: Thermoplastic, Black.
- * Seal Nut: Thermoplastic, Black.
- * Seal: Rubber.
 - 1.Red Color Seal 1, Cable OD 4.0~6.0mm
 - 2.Blue Color Seal 2, Cable OD 6.0~8.0mm
- * Wire Conductor: 20AWG~24AWG.

AD-02BMMB-QL8AP0	AD-03BMMB-QL8AP0	AD-04BMMB-QL8AP0	AD-05BMMB-QL8AP0	AU-06BMMB-QL8AP0	AU-08BMMB-QL8AP0

UNIT:mm TOLERANCE ±0.5 mm	TITLE X-Lok A-Size Field Installable Screw-in Type M Conn. M Pin		Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO	DRAWN BY Allen Pan	DATE 2020-01-17		
	SCALE 1:1	SIZE A4			SHEET 1	OF 1	DWG NO AX-XXBMMB-QL8AP0	CHECKED BY Sam Ho	DATE 2020-01-17
	REV. A	WC-REV. A.5			◎: Inspection item		CUSTOMER ALTW	APPROVED BY Fred Lee	DATE 2020-01-17