

## SPECIFICATION

- Part No. : **MA710.A.ABI.001**
- Product Name : Pantheon Antenna 3in1 MA.710  
Screw-Mount (Permanent Mount)  
2 x 4G/3G/2G LTE MIMO Cellular Antenna  
1 x GPS/GLONASS/GALILEO Antenna
- Feature : 2 x Cellular 2G/3G/4G Antennas (MIMO)  
LTE / HSPA / GSM / GPRS / CDMA / UMTS  
698~960MHz / 1710~2170MHz / 2300~2700MHz /  
2900-3500MHz  
1 x GPS/GLONASS/GALILEO 1575.42/1602MHz Active  
Antenna  
IP67 Waterproof  
High Efficiency / Peak Gain Outdoor Antenna  
RoHS Compliant



## 1. Introduction

The MA710 Pantheon antenna is an omnidirectional heavy-duty, fully IP67 waterproof external M2M antenna for use in telematics, transportation and remote monitoring applications. It includes two LTE MIMO antennas and one GPS/GLONASS/GALILEO antenna, in the highest efficiency and peak gain possible. This antenna particularly finds its application in mobile video, vehicle communications, location and fleet management, safety & security, remote industrial equipment monitoring. The antenna consists of two LTE MIMO elements 698-960MHz, 1710-2170MHz, 2300~2700MHz, 2900-3500MHz. The antennas are designed to work equally well on LTE to deliver maximum data rates, or on legacy 3G and 2G frequencies where LTE is not available.

The GNSS antenna is a wide-band GPS/GLONASS/GALILEO element tuned to have optimum gain at 1575.42 MHz GPS/GALILEO and 1602MHz GLONASS frequencies.

Mechanically, we have packed 3 high efficiency and gain antennas in an extremely robust IP67 direct mount antenna package with excellent isolation (20dB+). The strengthened domed housing is designed to deflect tree branches and wires that tend to catch and break shark fin or rigid whip antennas. The Pantheon has its own internal ground-plane and can radiate on any mounting environment such as metal or plastic without affecting performance. The internal components are individually screwed down onto a robust plate, preventing damage from regular vehicle vibrations. A completely waterproof mounting seal prevents water from leaking under the housing.

The connectors and cable length are customizable. It is also available in White (MA710W).

## 2. Specification Table

4G/3G/2G MIMO									
	LTE	GSM 850	GSM 900	DCS	PCS	WCDMA I	ISM	LTE	
Frequency	698 ~787	824 ~896	880 ~960	1710 ~1880	1850 ~1990	1920 ~2170	2400 ~2500	2600~3500	MHz
MIMO 1									
VSWR (max.)	2.5	2.5	3	2.5	2.5	2.5	3	2.5	
Efficiency	66.17	51.88	47.87	39.97	47.67	45.97	28.73	38.35	%
Peak Gain	2.52	1.48	1.15	1.03	1.22	1.22	0.15	3.20	dBi
MIMO 2									
VSWR (max.)	3.5	3.5	3.5	2.5	2.5	2.5	2	2.5	
Efficiency	35.98	18.41	20.24	40.85	35.42	37.68	42.27	35.24	%
Peak Gain	1.56	-2.08	-2.31	1.69	0.86	2.06	2.99	2.97	dBi
Polarization	Vertical								
Impedance	50								
	Ω								
GPS-GLONASS-GALILEO									
Centre Frequency	1575.42MHz / 1602MHz								
Bandwidth	10MHz								
Radiation Efficiency	50 % (without cable)								
Passive Gain @ Zenith	4.0 dBi typ. (with $\psi=140$ mm ground)								
VSWR	2								
Impedance	50Ω								
DC Power Input Range	1.8V ~ 5V								
DC input	<b>1.8V</b>		<b>3.3V</b>		<b>4.0V</b>		<b>5.5V</b>		
MHz	<b>1575.42</b>	<b>1602</b>	<b>1575.42</b>	<b>1602</b>	<b>1575.42</b>	<b>1602</b>	<b>1575.42</b>	<b>1602</b>	
VSWR	2	2	2	2	2	2	2	2	2
LNA Gain	17	17	29.2	29	31	31	32.3	32	
Noise Figure	3.4	3.4	3.1	3.1	3.2	3.2	3.4	3.4	
Power Consumption	3.2	3.2	7.5	7.5	9.4	9.4	15	15	
Band Attenuation	1535MHz: -20dB 1642MHz: -20dB		1520MHz: -20dB 1642MHz: -20dB		1520MHz: -20dB 1642MHz: -20dB		1520MHz: -20dB 1642MHz: -20dB		
Cable	3m RG174 standard								
Connector	SMA(M) standard								

MECHANICAL	
Antenna Dimensions	Height 85.7mm x Diameter 145.6mm
Casing	Wonderloy PC-540 PC/ABS Alloy
Waterproof	IP67
4G/3G/2G MIMO 1	3M Low Loss CFD-200 SMA(M)
4G/3G/2G MIMO 2	3M Low Loss CFD-200 SMA(M)
GPS/GLONASS/GALILEO	3M RG-174 SMA(M)
ENVIRONMENTAL	
Operation Temperature	-40°C to 85°C
Storage Temperature	-40°C to 90°C
Humidity	Non-condensing 65°C 95% RH

\* all measurements were conducted with 3m low loss CFD200 cable on cellular and RG-174 cable on GPS/GLONASS/GALILEO


LTE BANDS				
Band Number	LTE / LTE-Advanced / WCDMA / HSPA / HSPA+ / TD-SCDMA			
	Uplink	Downlink	MIMO 1	MIMO 2
1	UL: 1920 to 1980	DL: 2110 to 2170	✓	✓
2	UL: 1850 to 1910	DL: 1930 to 1990	✓	✓
3	UL: 1710 to 1785	DL: 1805 to 1880	✓	✓
4	UL: 1710 to 1755	DL: 2110 to 2155	✓	✓
5	UL: 824 to 849	DL: 869 to 894	✓	✗
7	UL: 2500 to 2570	DL: 2620 to 2690	✓	✓
8	UL: 880 to 915	DL: 925 to 960	✓	✗
9	UL: 1749.9 to 1784.9	DL: 1844.9 to 1879.9	✓	✓
11	UL: 1427.9 to 1447.9	DL: 1475.9 to 1495.9	✗	✗
12	UL: 699 to 716	DL: 729 to 746	✓	✓
13	UL: 777 to 787	DL: 746 to 756	✓	✓
14	UL: 788 to 798	DL: 758 to 768	✓	✓
17	UL: 704 to 716	DL: 734 to 746 (LTE only)	✓	✓
18	UL: 815 to 830	DL: 860 to 875 (LET only)	✓	✗
19	UL: 830 to 845	DL: 875 to 890	✓	✗
20	UL: 832 to 862	DL: 791 to 821	✓	✗
21	UL: 1447.9 to 1462.9	DL: 1495.9 to 1510.9	✗	✗
22	UL: 3410 to 3490	DL: 3510 to 3590	✗	✗
23	UL: 2000 to 2020	DL: 2180 to 2200 (LTE only)	✓	✓
24	UL: 1625.5 to 1660.5	DL: 1525 to 1559 (LTE only)	✓	✓
25	UL: 1850 to 1915	DL: 1930 to 1995	✓	✓
26	UL: 814 to 849	DL: 859 to 894	✓	✗
27	UL: 807 to 824	DL: 852 to 869 (LTE only)	✓	✗
28	UL: 703 to 748	DL: 758 to 803 (LTE only)	✓	✗
29	UL: -	DL: 717 to 728 (LTE only)	✓	✓
30	UL: 2305 to 2315	DL: 2350 to 2360 (LTE only)	✓	✓
31	UL: 452.5 to 457.5	DL: 462.5 to 467.5 (LTE only)	✗	✗
32	UL: -	DL: 1452 - 1496	✗	✗
35		1850 to 1910	✓	✓
38		2570 to 2620	✓	✓
39		1880 to 1920	✓	✓
40		2300 to 2400	✓	✓
41		2496 to 2690	✓	✓
42		3400 to 3600	✓	✗
43		3600 to 3800	✗	✗

\*Covered bands represent an efficiency greater than 20%


### 3. LTE MIMO

#### 3.1. LTE MIMO 1 and LTE MIMO 2 Specification


##### 3.1.1. Return Loss

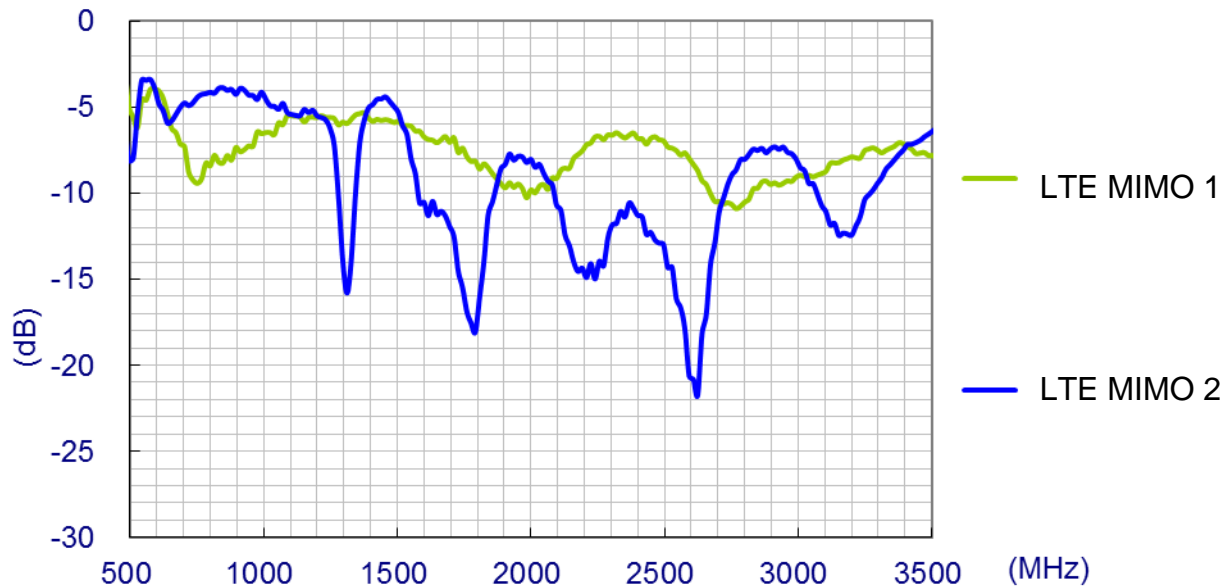


##### 3.1.2. Maximum Gain

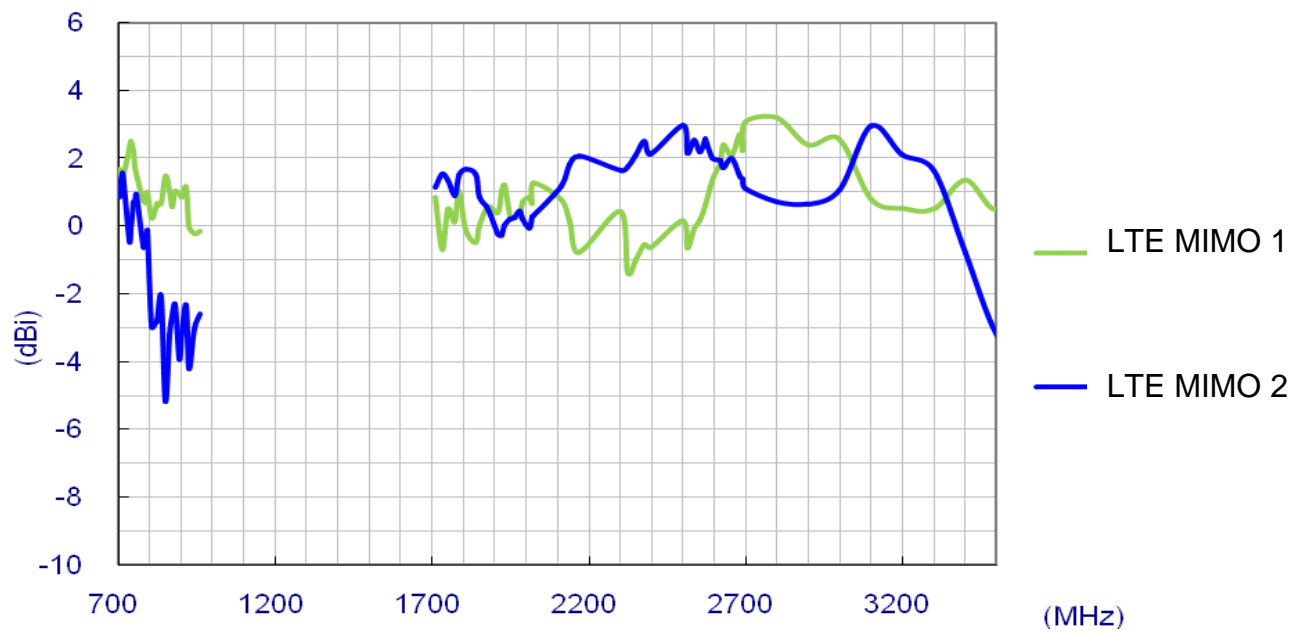

### 3.1.3. Average Gain

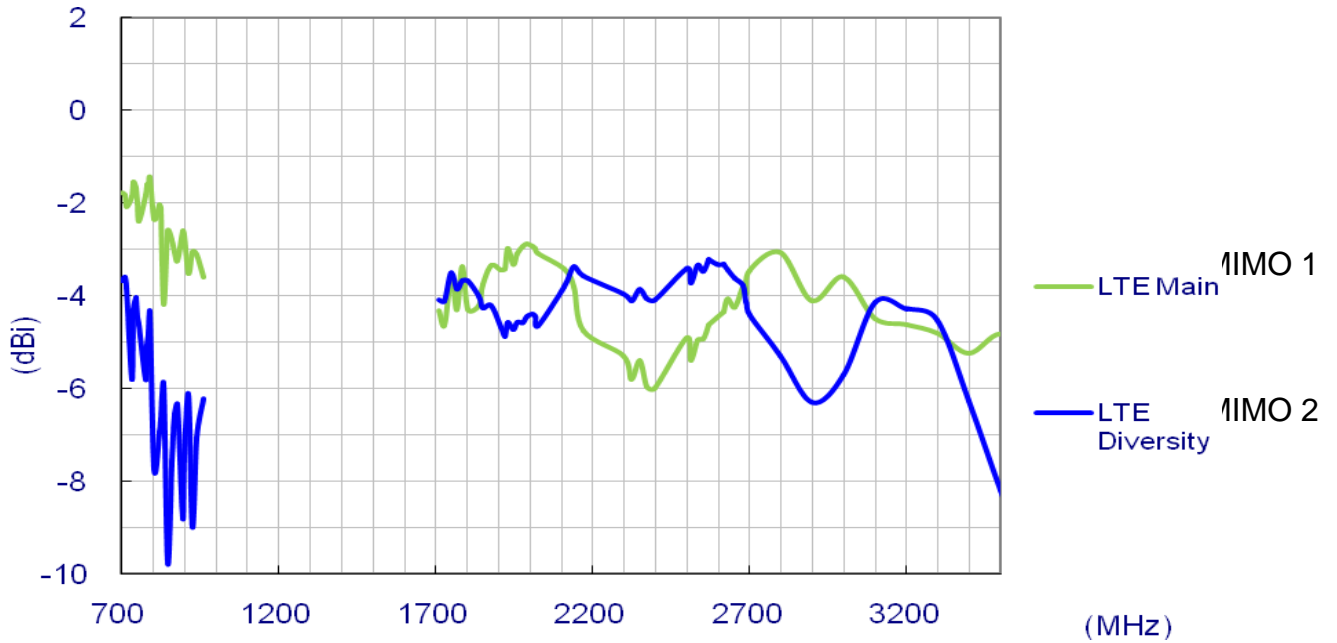

### 3.1.4. Efficiency

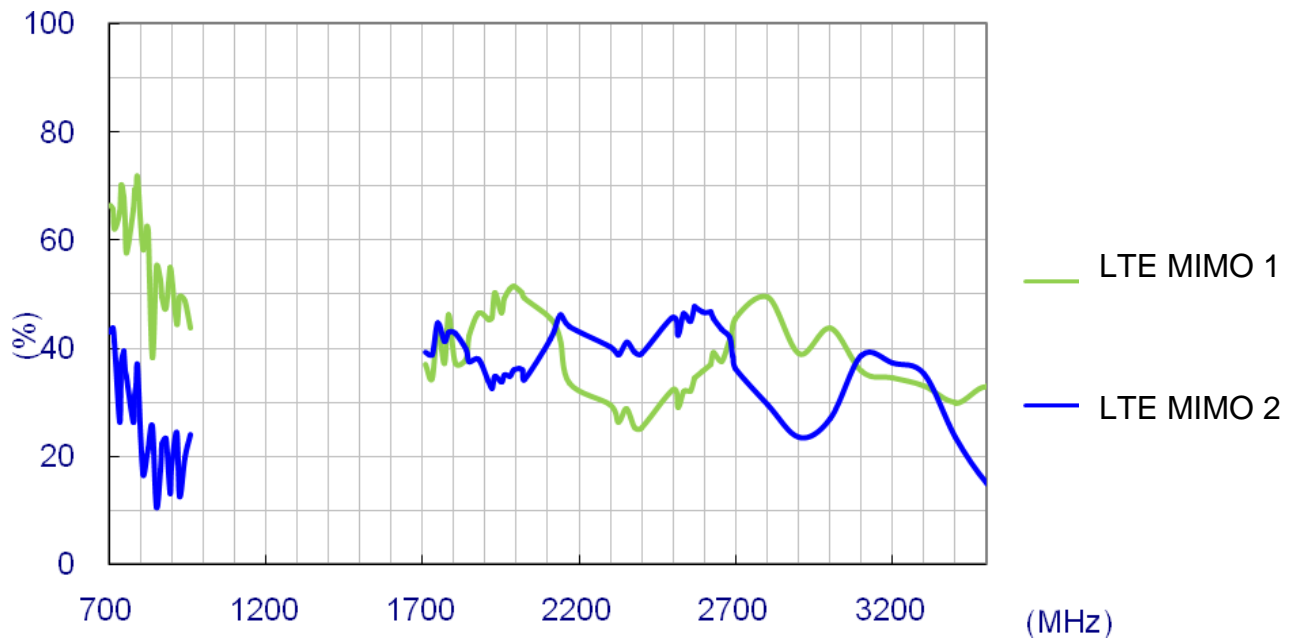





### 3.2. Radiation Patterns









### 3.2.1. 3.2.1 LTE MIMO 1 Radiation Pattern

XY plane

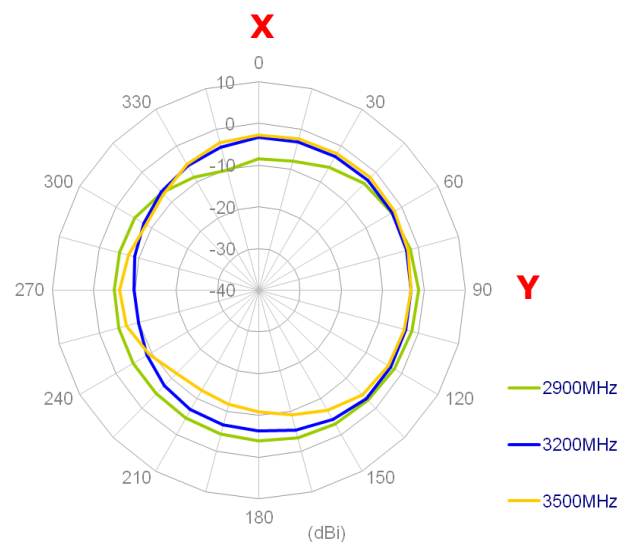
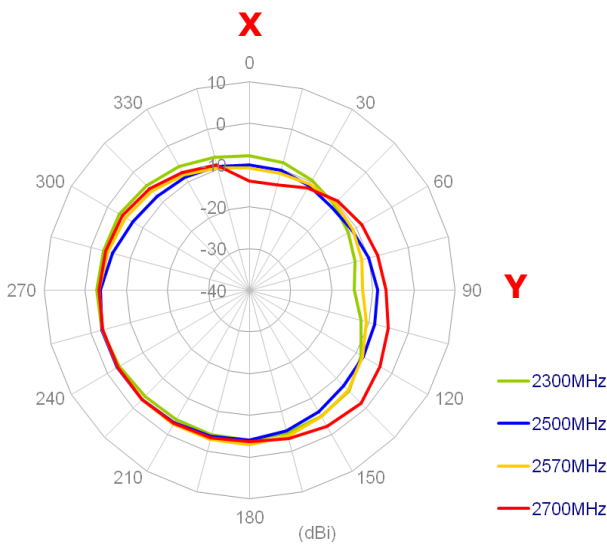
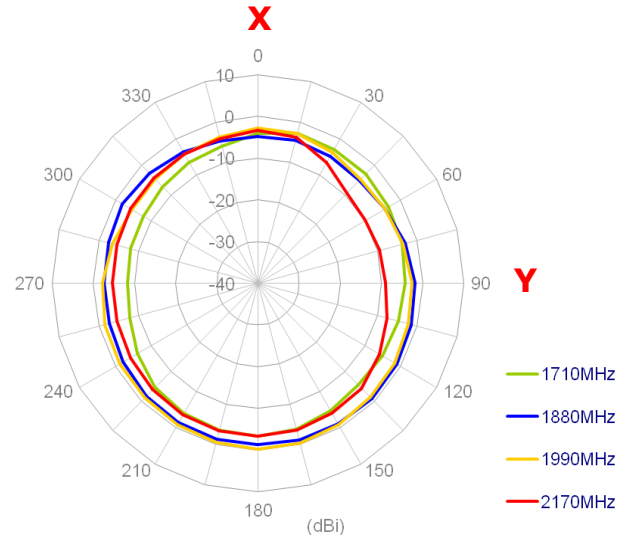
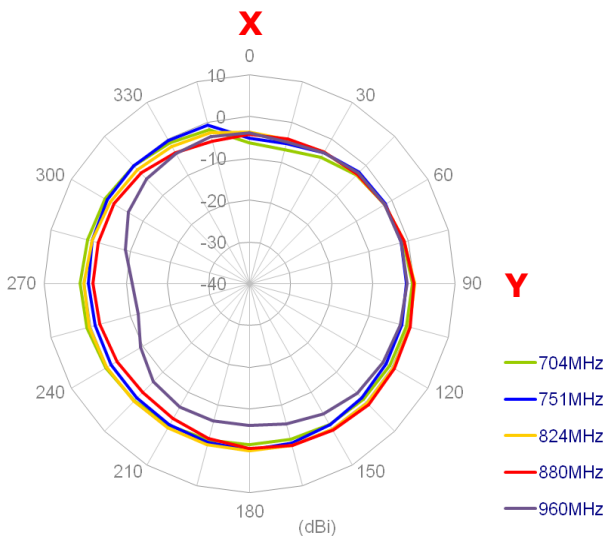


XZ Plane

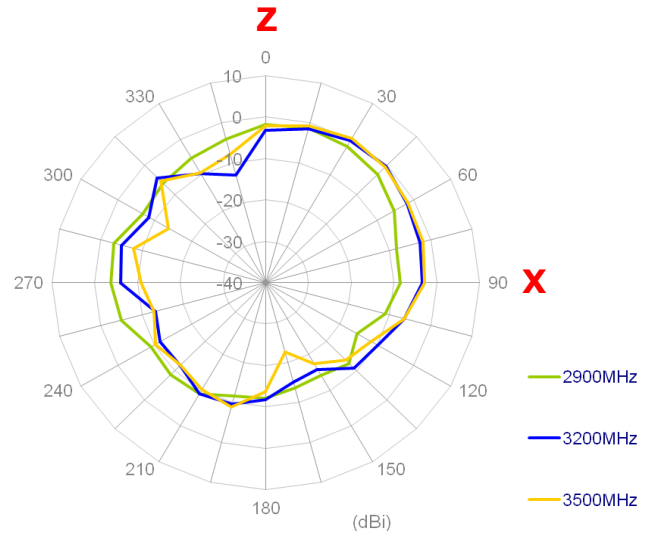
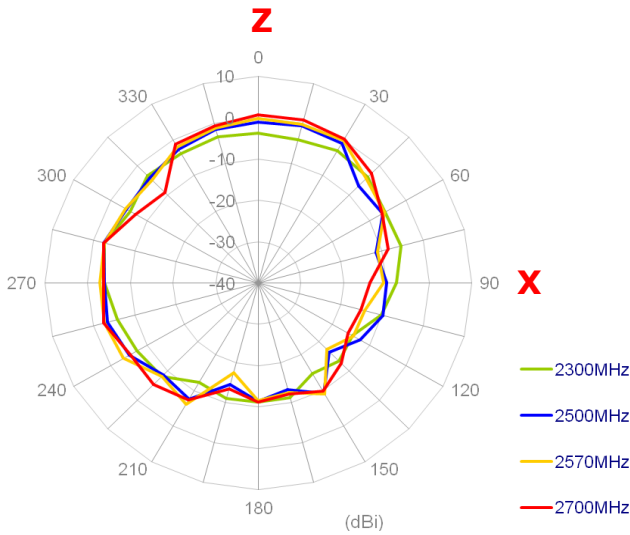
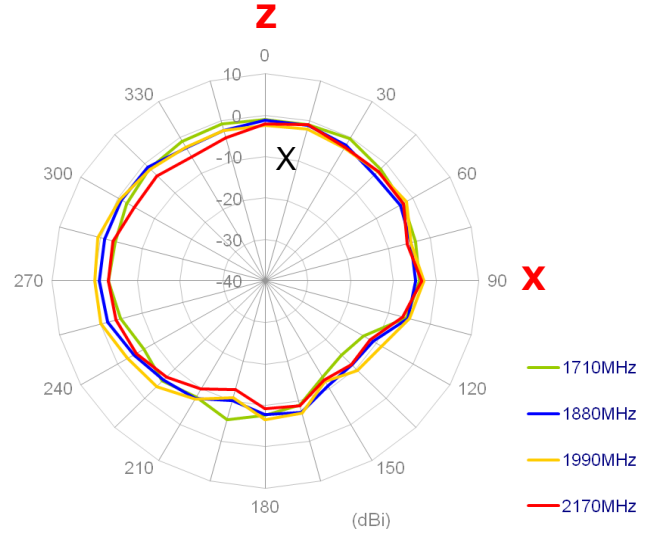
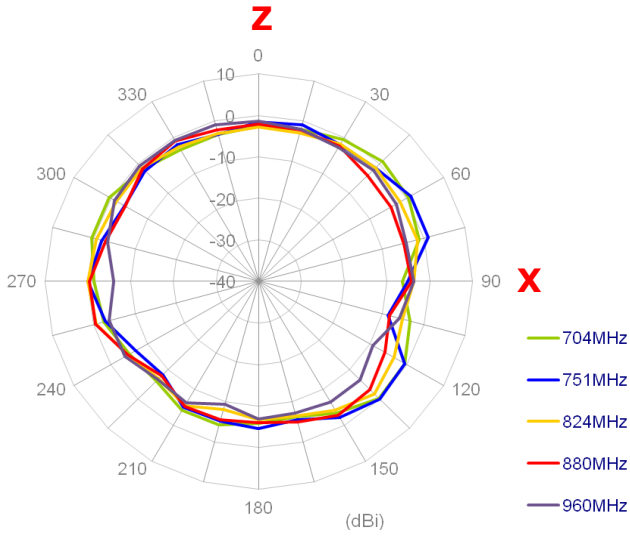


### 3.2.2. LTE MIMO 2 Radiation Pattern

#### XY Plane

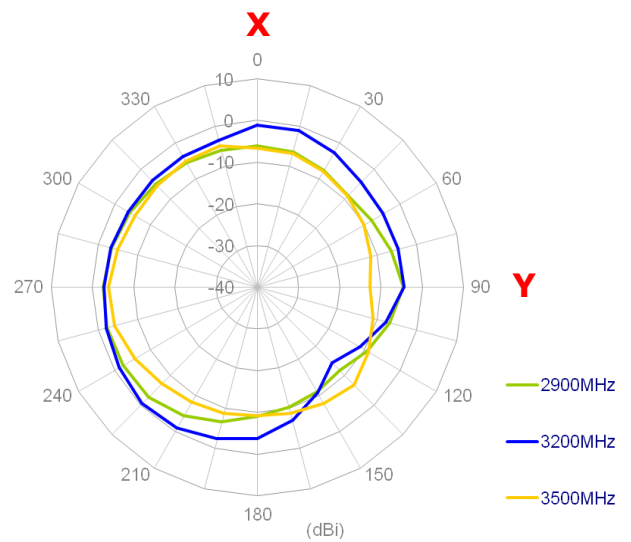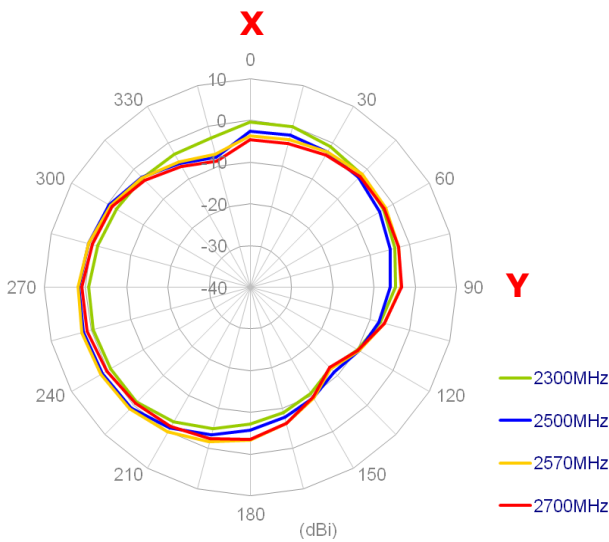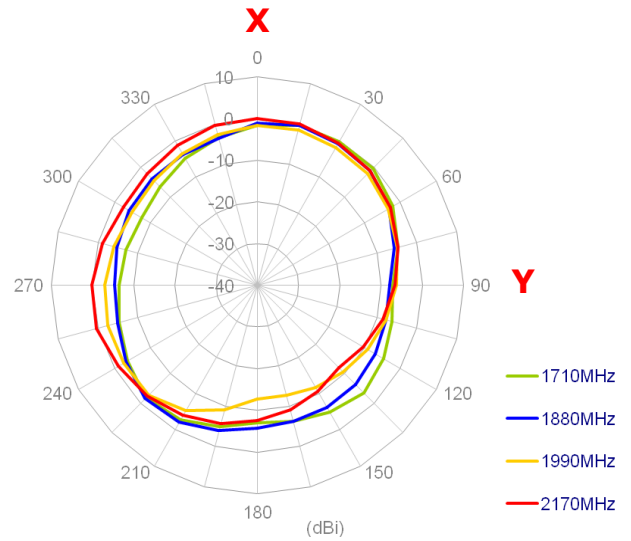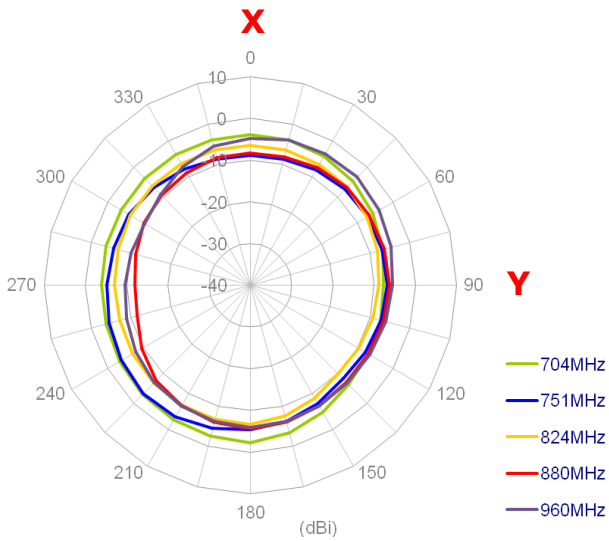


XZ Plane

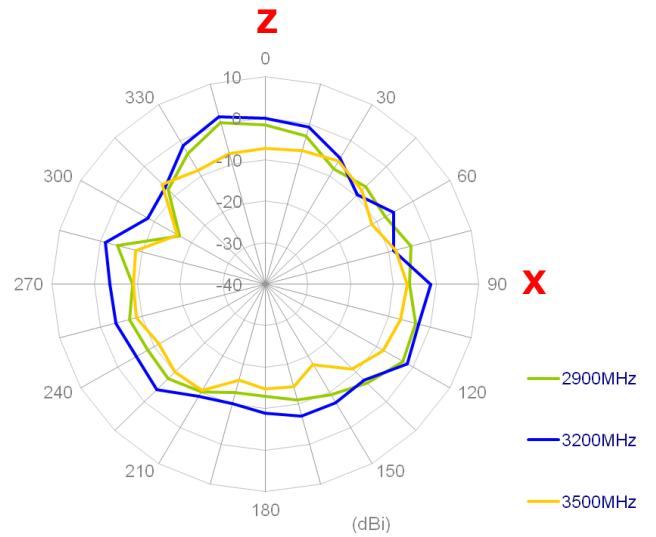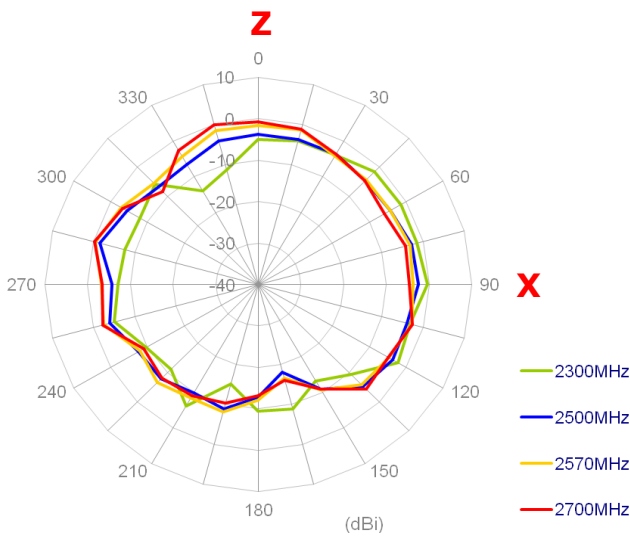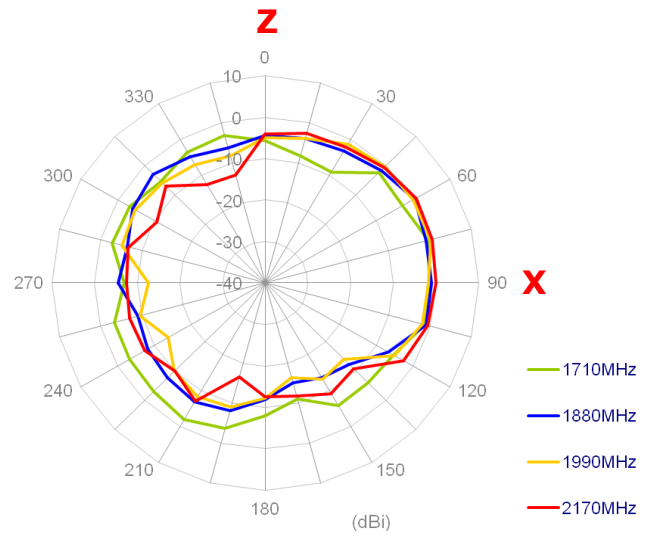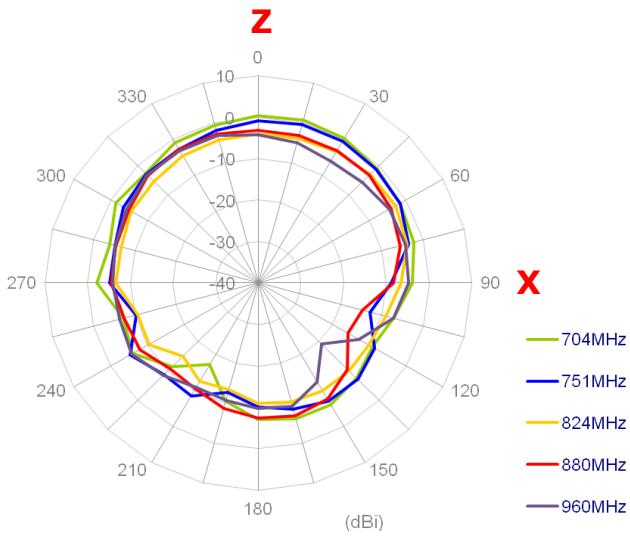


## 4. GPS/GLONASS/GALILEO


### 4.1. Block diagram

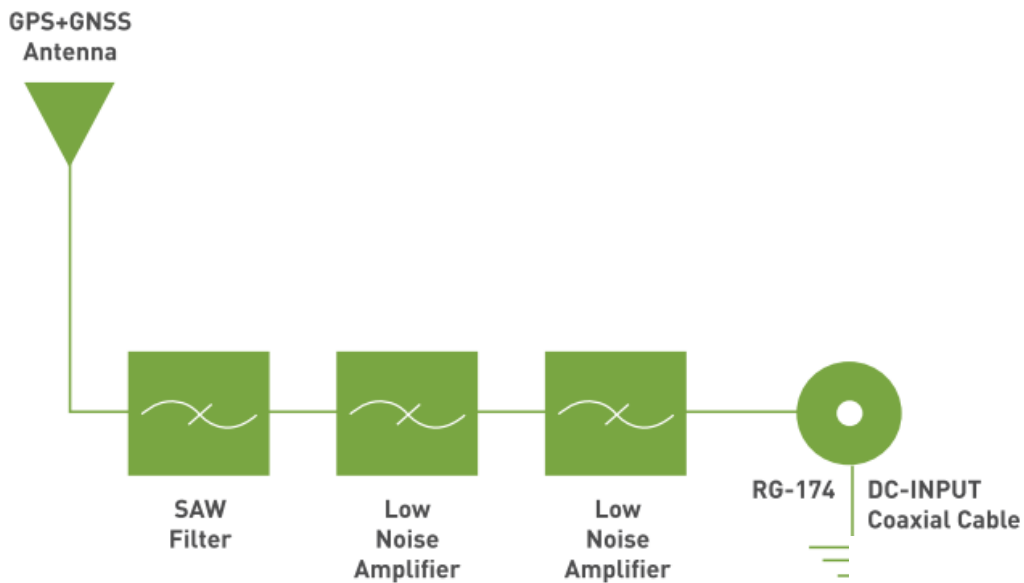


### 4.2. Return Loss

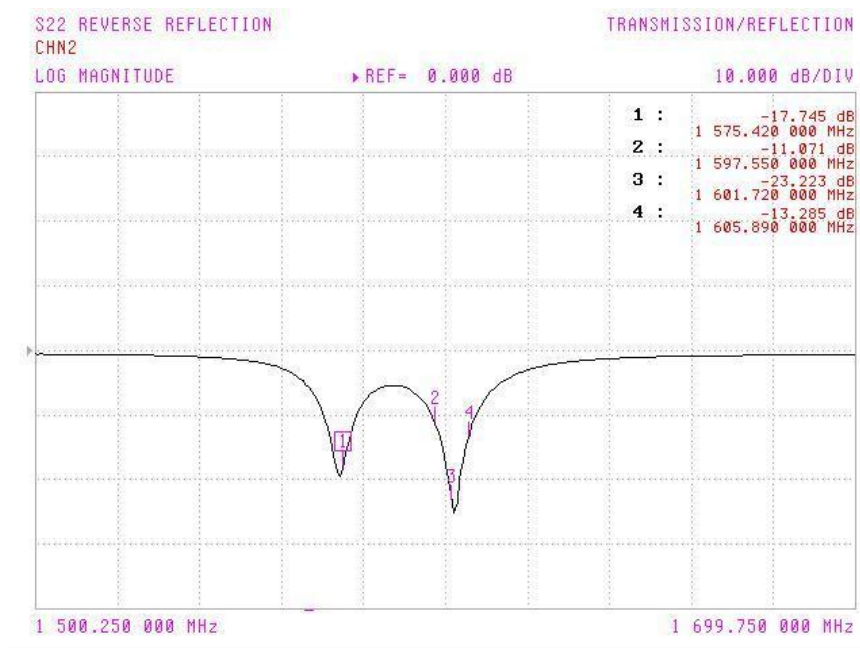


### 4.3. Radiation pattern

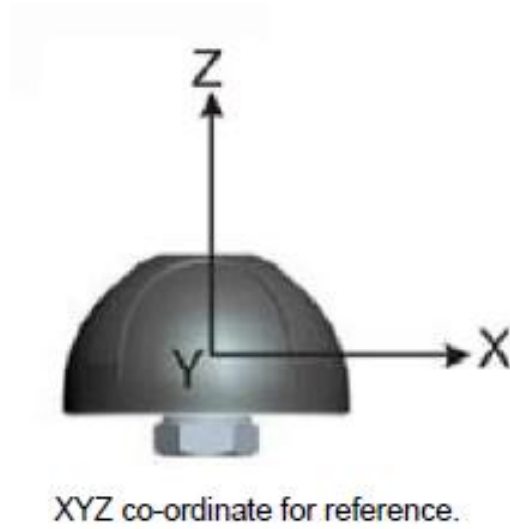


XZ Plane Free Space @1575.42MHz

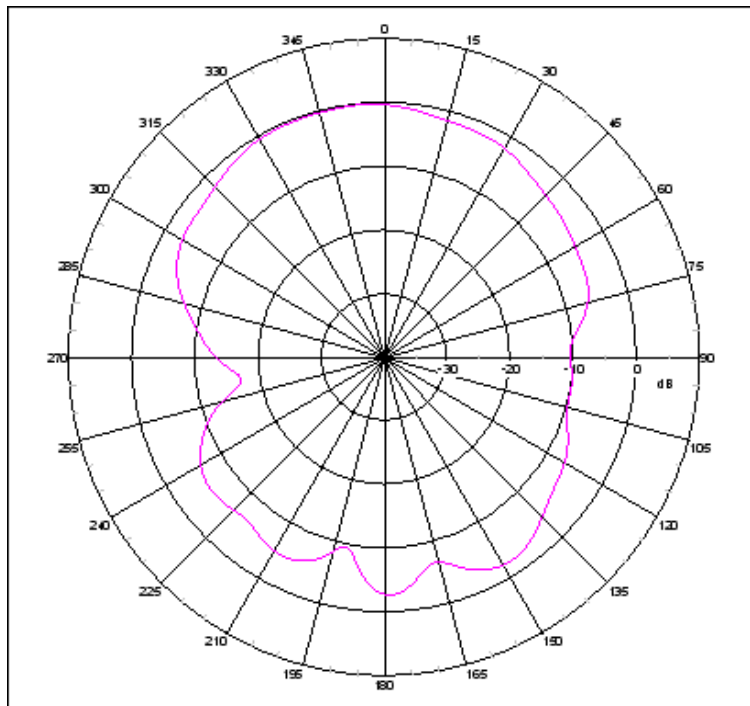


YZ Plane Free Space @1575.42MHz

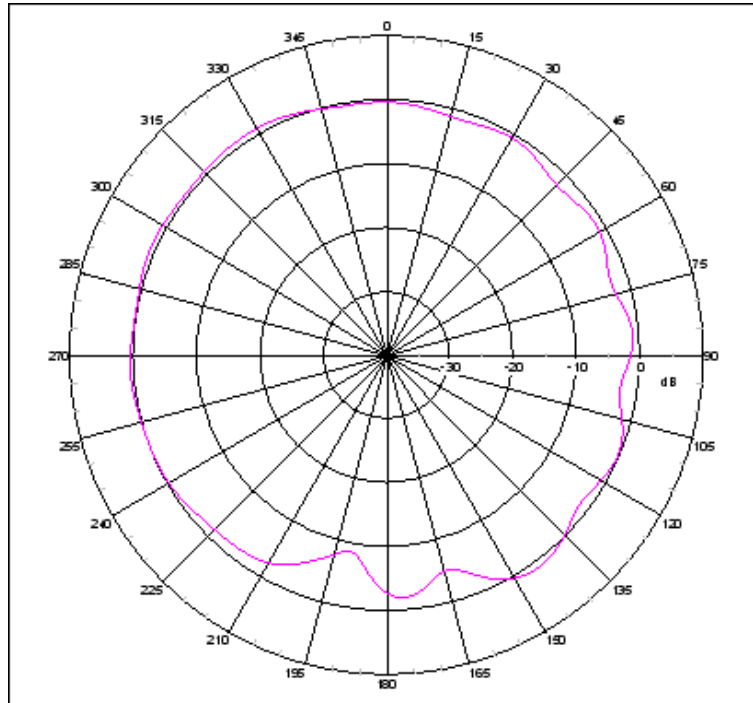

XZ Plane Free Space @1602MHz


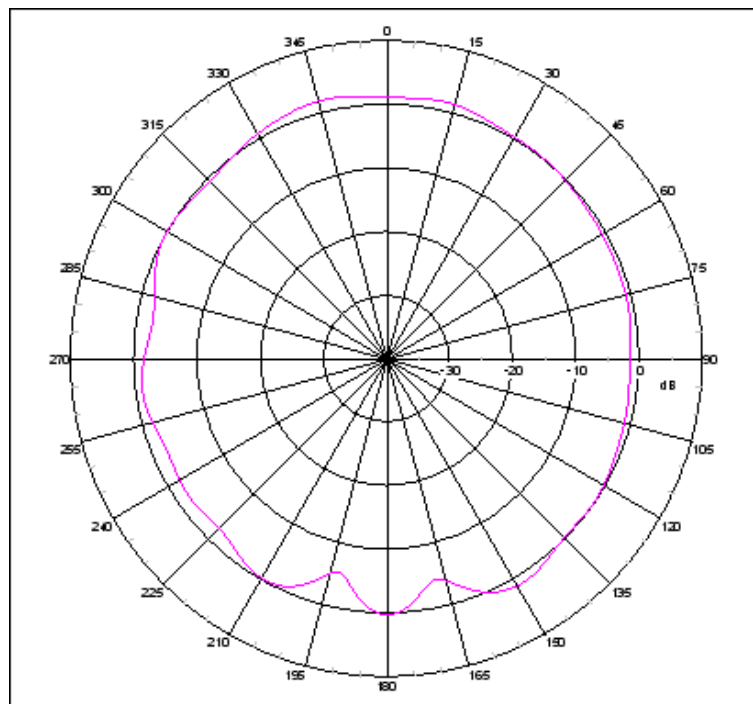


YZ Plane Free Space @1602MHz

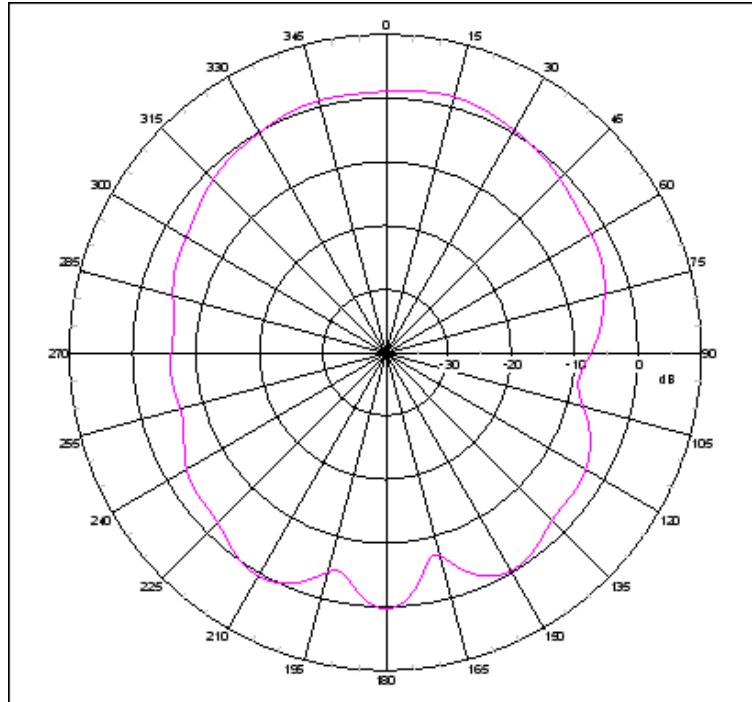




#### 4.4 GPS/GLONASS/GALILEO LNA

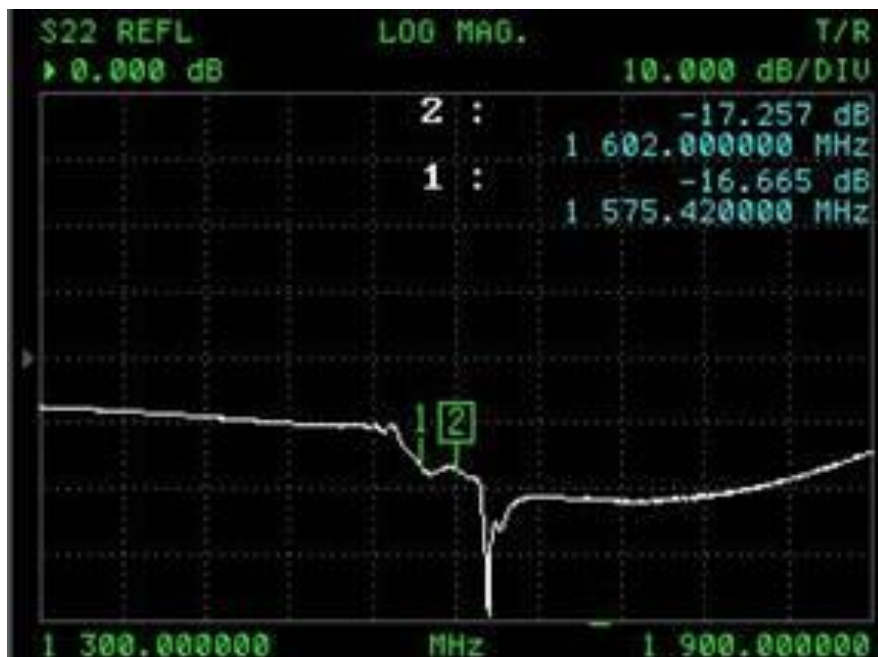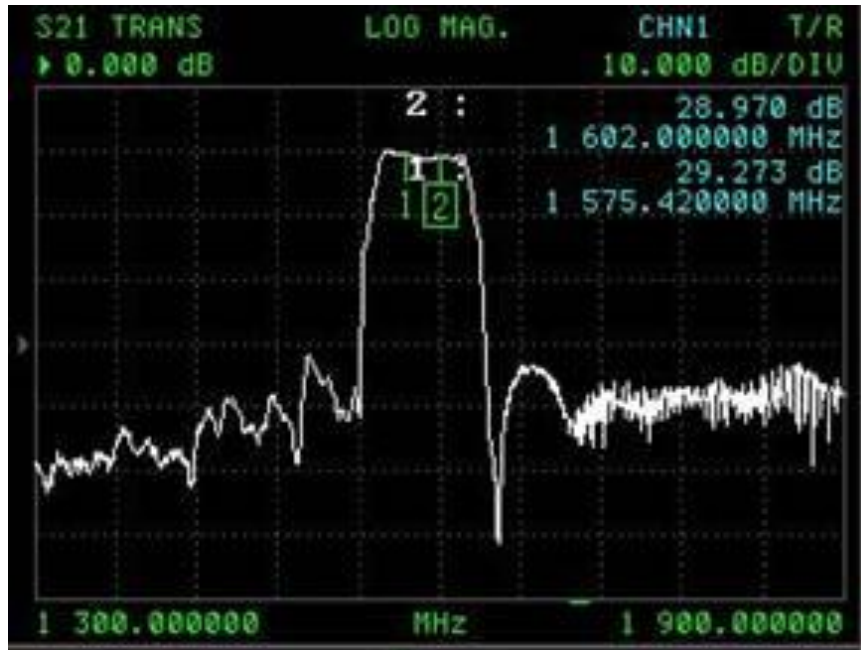

## 5. Mechanical Drawing (Unit: mm)

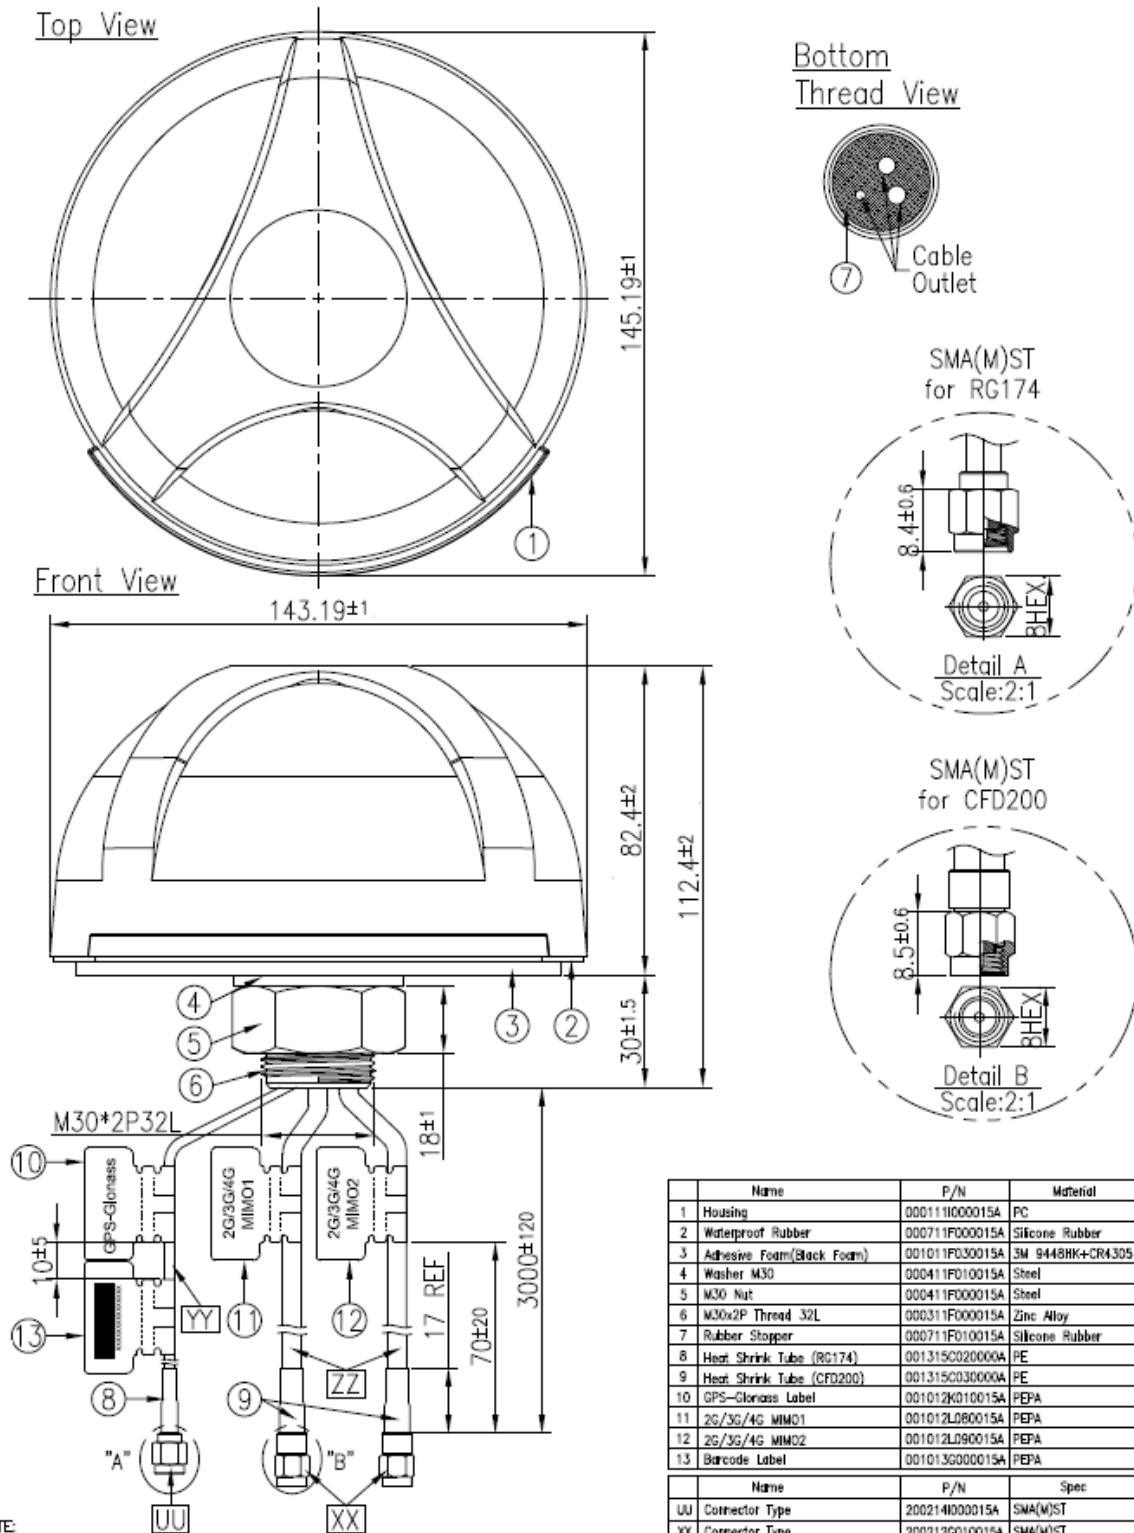

NOTE:


1. Long Part Number:MA710.AA301111.B305111.I305111

Name	P/N	Material	Finish	QTY
1 Housing	000111000015A	PC	Black	1
2 Waterproof Rubber	000711F000015A	Silicone Rubber	Black	1
3 Adhesive Foam(Black Foam)	001011F030015A	3M 9448BK+CR4305	White Liner	1
4 Washer M30	000411F010015A	Steel	Ni Plated	1
5 M30 Nut	000411F000015A	Steel	Ni Plated	1
6 M30x2P Thread 32L	000311F000015A	Zinc Alloy	Ni Plated	1
7 Rubber Stopper	000711F010015A	Silicone Rubber	Black	1
8 Heat Shrink Tube (RG174)	001315C020000A	PE	Black	1
9 Heat Shrink Tube (CFD200)	001315C030000A	PE	Black	2
10 GPS-Glonass Label	001012K010015A	PEPA	Orange	1
11 2G/3G/4G MIMO1	001012L080015A	PEPA	Gray	1
12 2G/3G/4G MIMO2	001012L090015A	PEPA	White	1
13 Barcode Label	001013G000015A	PEPA	White	1


  

Name	P/N	Spec	Finish	QTY
UU Connector Type	200214D00015A	SMA(M)ST	Au Plated	1
XX Connector Type	200212G010015A	SMA(M)ST	Au Plated	2
YY Cable Type	301315C000000A	RG-174	Black	1
ZZ Cable Type	301419C010000A	CFD-200	Black	2


## 6. Packaging

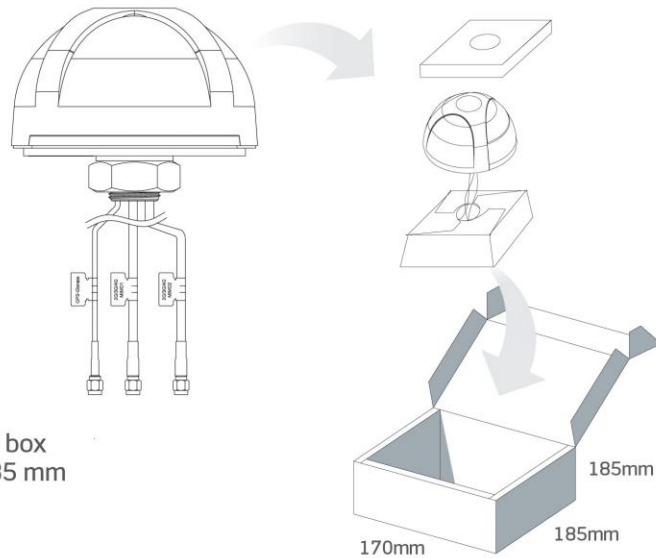

1 pcs MA710.W.A.ABI.001 per box  
 Box Dimensions - 185\*170\*185 mm  
 Weight - 1300g

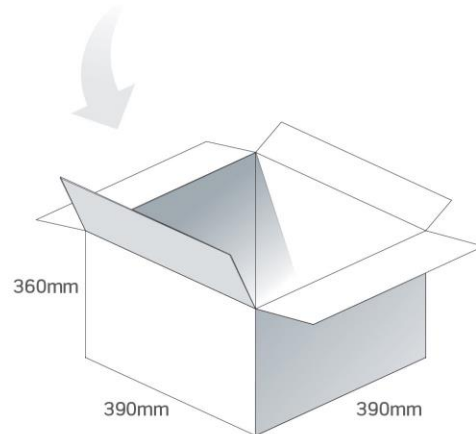

8 pcs MA710.W.A.ABI.001 per carton  
 Carton - 390\*360\*390mm  
 Weight - 11.5Kg

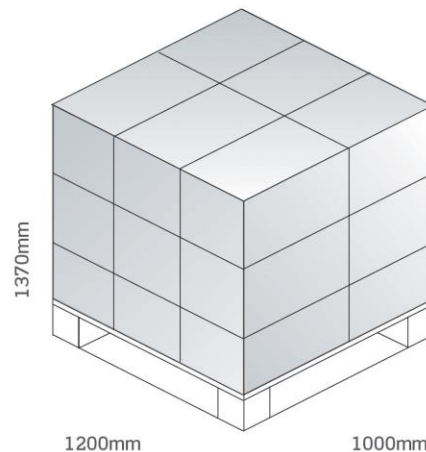

Pallet Dimensions 1200 x 1000 x 1370mm  
 18 Cartons per Pallet  
 6 Cartons per layer  
 3 Layers

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.