

### **Mounting Option**

08-#4-40 Unified Threaded Inserts

#### **Contact Detail**

558-90 Degree Bend (Code 541 Contacts) .156 [3.96] Contact Spacing x .200 [5.08] Row Spacing





## **See Accompanying Page for:**

- **Bend Detail**
- **Mounting Options**
- **Features and Specifications**

THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.




0.388[9.86] Card Slot
.160 [4.06] Point of Contact
SECTION A-A

333 Series Card Edge Connector Part Number: 333-018-558-808			ACAD REFERENCE NO. 333 ENG MASTER			
			J.LEE	DATE: O	CT. 14/09	
Fan Number, 555-016-556-606		CHECKED	):	DATE:		
	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE:	NTS	SHEET	1 OF 4	
	DRAWING	NUMBER		ISSUE		
YOUR CONNECTION TO QUALITY & SERVICE	MANUFACTURE OR SALE OF APPARATUS	3	33 Assembly		1	

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.

1

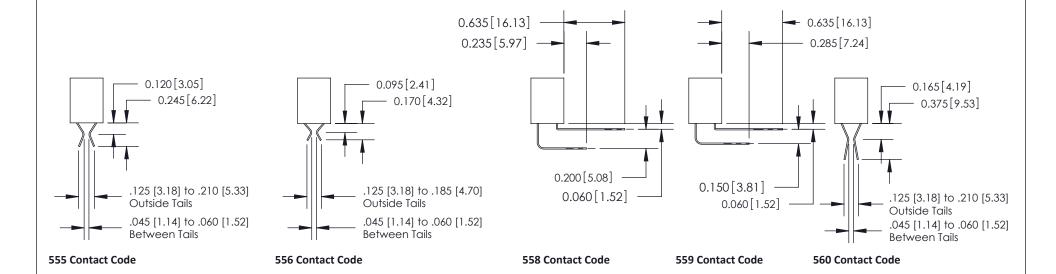

333 Series Card Edge Connector Contact Bend Detail		ACAD REFERENCE NO. 333 ENG MASTER			
		DRAWN: J.LEE	DATE: OC	DATE: OCT. 14/09	
		CHECKED:	DATE:	DATE:	
EDAC INC THESE DRAWINGS AND SPECIFICATIONS		SCALE: NTS	SHEET :	2 OF 4	
TORONTO, ONTARIO  ARE THE PROPERTY OF EDAC INC., AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE	DRAWING NUMBER		ISSUE		
CANADA  OR USED AS THE BASIS FOR THE  MANUFACTURE OR SALE OF APPARATUS  WITHOUT WRITTEN PERMISSION.		333 Assembl	У	1	


THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER



SOL NUMBER

DRIGINAL

1

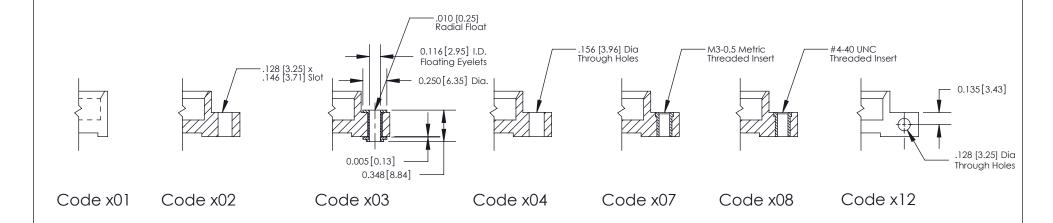

	333 Series Card Edge Connector		ACAD REFERENCE NO. 333 ENG MASTER				
		DRAWN:	J.LEE	DATE: O	CT. 14/09		
	Mounting Options		CHECKED:		DATE:		
	EDAC INC THESE DRAWINGS AND SPECIFICATIONS		SCALE:	NTS	SHEET :	3 OF 4	
		ĭ ∥ ┌ TORONTO, ONTARIO   SHALL	ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE	DRAWING	NUMBER		ISSUE
	CANADA CANADA		MANUFACTURE OR SALE OF APPARATUS	3	33 Assembly		1

ISSUE NUMBER

ORIGINAL



## **Features**

- .156 (3.96) Contact Spacing x .200 (5.08) Row Spacing
- Accepts .062 (1.57) Nominal Thickness P.C. Board
- High Profile Insulator Body .600 (15.24)
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90 Degree, & Extender Board Bends
- Single or Dual Row Configurations
- Variety of Mounting Options, Flush or Offset Lugs
- Accepts Between Contact and In-Contact Polarizing Keys

# **Specifications**

- Insulator Material: Thermoplastic Polyester, UL 94V-0, Colour: Green
- Contact Material: Copper, Nickel, Tin Alloy CA-725
- Contact Plating: Gold on the Mating Area, Tin on the Contact Tails, Nickel Underplate
- Current Rating: 3 Amperes Continuous
- Contact Resistance: 10 Milliohms Maximum
- Dielectric Withstanding Voltage: 1800 V AC rms at Sea Level Between Adjacent Contacts
- Insulation Resistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +105 Degrees C
- Insertion Force: 16 oz (4.45 N) Maximum per Contact Pair when Tested with a .070 (1.78) Thick Gauge
- Withdrawal Force: 1 oz (0.28 N) Minimum per Contact Pair when Tested with a .054 (1.37) Thick Gauge

333 Series Card Edge Connector	ACAD REFERENCE NO. 333 ENG MASTER
Features and Specifications	DRAWN: J.LEE DATE: OCT. 14/09
realities and specifications	CHECKED: DATE:
	WINGS AND SPECIFICATIONS SCALE: NTS SHEET 4 OF 4
	BE REPRODUCED, OR COPIED DRAWING NUMBER ISSUE
	IRE OR SALE OF APPARATUS 333 Accembly 1