


Data sheet | Item number: 756-5201/030-020




Sensor/Actuator cable; M8 socket; straight; M8 plug; straight; 3-pole;

Length: 2 m

www.wago.com/756-5201/030-020

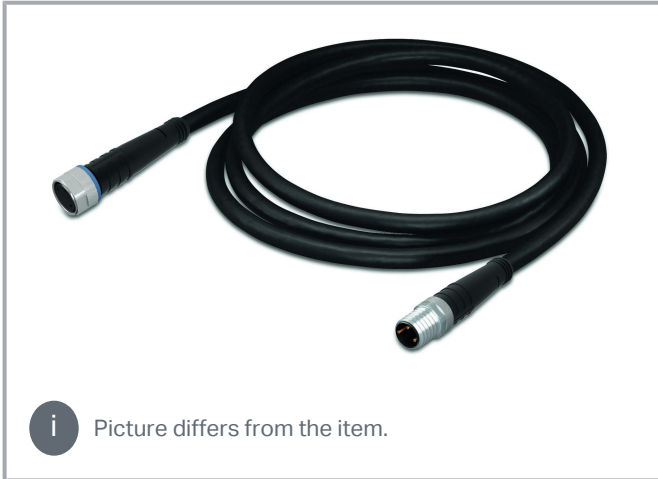

 Picture differs from the item.

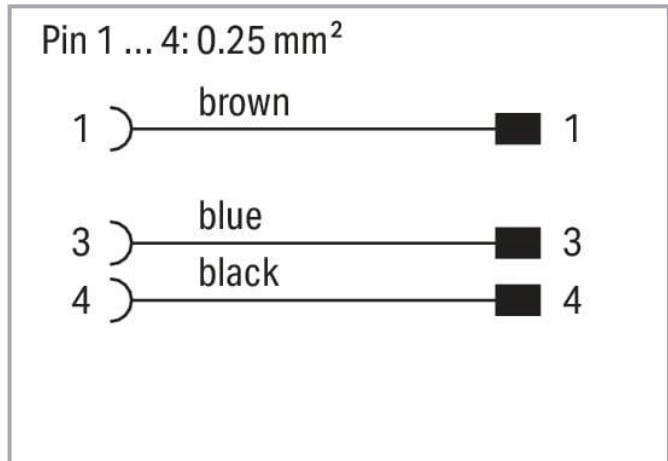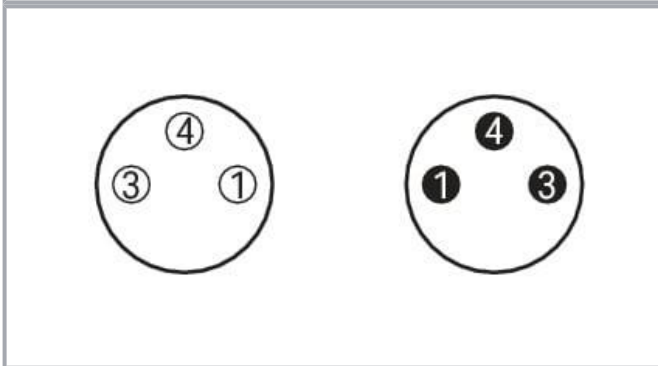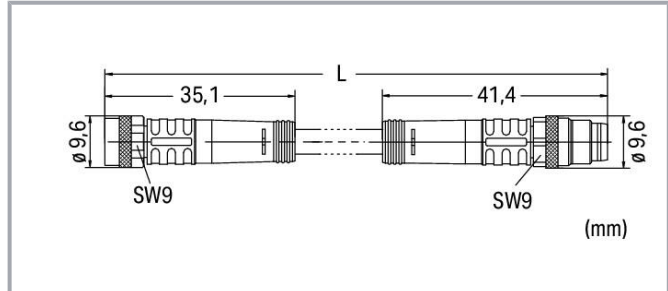

Item description

Short description:

- PUR, halogen-free
- Suitable for drag chains
- High resistance to microbes, hydrolysis, oil, chemicals and UV radiation
- High chemical resistance
- Cable used: UL listed

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

Data

Technical data

General

Operating voltage	60 VAC/DC
Operating current	4 A
Rated surge voltage	1.5 kV
Contact resistance	10 mΩ
Conductor resistance	≤ 60 Ω/km
Pollution degree	3 per VDE 0110
Protection type	IP67
Ambient (operating) temperature (static)	-50 ... +90 °C
Ambient (operating) temperature (dynamic)	-25 ... +90 °C

Suitable for drag chains

Bending radius	10 x cable diameter (min.)
Bending cycles	2 Mio.
Acceleration (min.)	5
Travel speed (max.)	3.33
Travel path (horizontal) max.	5
Travel path (vertical) max.	2
Torsional capacity	180

Cable

Cable length	2 m
Type code	LiF9YH-11YH or LiF9YC11YFHF
Conductor configuration	Bare copper wire, fine-stranded (42 x 0.1 mm)
Conductor insulation	PP9Y (halogen-free)
Sheath material	Polyurethane (PUR), halogen-free per DIN VDE 0472 Part 815, flame resistant per IEC 332-2, self-extinguishing
Sheathed cable color	black
Sheathed cable diameter	3.9 ... 4.3 mm

Connector

Connection type	M8 socket - M8 plug
Cable connection direction to mating direction	0°
Cable connection direction to mating direction (2)	0°

Subject to changes. Please also observe the further product documentation!



Housing material	Polyurethane (PUR)
Contact material	CuSn
Tightening torque	0.6 Nm

Commercial data

eCl@ss 10.0	27-06-03-11
eCl@ss 9.0	27-06-03-11
ETIM 8.0	EC001855
ETIM 7.0	EC001855
PU (SPU)	10 (1) pcs
Packaging type	Box
Country of origin	DE
GTIN	4044918974561
Customs tariff number	85444290900

Environmental Product Compliance

CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	08c28df9-9dfb-4b13-a07f-cf34f5c481ff
SCIP notification number (Belgium)	c0431459-f4ea-48c9-98cc-489ee9ae0899
SCIP notification number (Bulgaria)	6032c694-57a0-4071-9a1f-908dcebbbc74
SCIP notification number (Czech Republic)	c5a4e116-48a3-475e-adbc-451e6185bde4
SCIP notification number (Denmark)	8f4d70c6-ed39-4b55-8119-7191ab3d3089
SCIP notification number (Finland)	9b3d2843-3991-48e2-8856-a3039a3e5196
SCIP notification number (France)	d8452aa5-f6e7-4e61-84d2-9dec1d37ddb8
SCIP notification number (Germany)	f76e22f7-144b-4c26-abef-e119b85e1034
SCIP notification number (Hungary)	d21a5c10-325d-45a4-b509-bb16f0b241be
SCIP notification number (Italy)	f94f549d-288e-49ed-a8bb-043c0ccb0e5e
SCIP notification number (Netherlands)	9808ed93-b902-4e11-bff9-6cfa67e02222
SCIP notification number (Poland)	4044753d-7efa-43cf-954a-c026689edf72
SCIP notification number (Romania)	dc09b55c-4613-4dcf-b932-9f78a735774f
SCIP notification number (Sweden)	d9251640-8754-4317-bd36-777a4a18b774

Downloads**Documentation**

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Bid Text

756-5201/030-020 X81 - Datei	2019 Feb 19	xml 3.3 kB	Download
---------------------------------	-------------	---------------	----------

756-5201/030-020 doc - Datei	2017 Sep 20	doc 26.1 kB	Download
---------------------------------	-------------	----------------	----------

System Description

IP67 Cables and Pluggable Connectors		pdf 161.6 kB	Download
--------------------------------------	--	-----------------	----------

CAD/CAE-Data

CAE data

WSCAD Universe 756-5201/030-020		URL	Download
---------------------------------	--	-----	----------

WSCAD Universe 756-5201/030-020		URL	Download
---------------------------------	--	-----	----------

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 756-5201/030-020 Sensor/Actuator cable; M8 socket; straight; M8 plug; straight; 3-pole; Length: 2 m		URL	Download
---	--	-----	----------

Installation Notes

Subject to changes. Please also observe the further product documentation!