

Features

Regulated Converters

- 15W in 2" x 1" Package
- 2kVDC and 3kVDC Isolation Options
- 2:1 or 3:1 Input Voltage Range
- Continuous Short Circuit Protection (power limiting)
- Synchronous Rectification on 3.4V & 5.1V outputs
- Full SMD internal design
- Remote Control Pin
- Efficiency to 87%

Description

The REC15-xxxxS_D -series offer single and dual regulated outputs in a 2"x1" package with 2kVDC or 3kVDC isolation options and are suitable for higher power industrial or medical applications. Remote on/off control is standard. The outputs with 3A load current have raised output voltages to compensate for track losses as standard.

Selection Guide

Part Number	Input Voltage (VDC)	Output Voltage (VDC)	Output Current (mA)	Efficiency (%)	Max. Cap. Load
REC15-xx3.4S/H*	9-18, 18-36, 36-75	3.4	3000	84-85	470µF
REC15-xx5.1S/H*	9-18, 18-36, 36-75	5.1	3000	86-87	470µF
REC15-xx12S/H*	9-18, 18-36, 36-75	12	1250	85-86	220µF
REC15-xx15S/H*	9-18, 18-36, 36-75	15	1000	85-86	100µF
REC15-xx05D/H*	9-18, 18-36, 36-75	±5	±1500	83-84	±220µF
REC15-xx12D/H*	9-18, 18-36, 36-75	±12	±625	85-86	±100µF
REC15-xx15D/H*	9-18, 18-36, 36-75	±15	±500	85-86	±50µF
REC15-xx3.4SZ/H*	12-36, 24-75	3.4	3000	85	470µF
REC15-xx5.1SZ/H*	12-36, 24-75	5.1	3000	87	470µF
REC15-xx12SZ/H*	12-36, 24-75	12	1250	86	220µF
REC15-xx15SZ/H*	12-36, 24-75	15	1000	85	100µF
REC15-xx05DZ/H*	12-36, 24-75	±5	±1500	86	±220µF
REC15-xx12DZ/H*	12-36, 24-75	±12	±625	86	±100µF
REC15-xx15DZ/H*	12-36, 24-75	±15	±500	86	±50µF

* Standard is /H2 for 2kVDC isolation, use /H3 for 3kVDC Isolation

2:1	3:1
xx = 9-18Vin = 12,	xx = 12-36Vin = 24,
xx = 18-36Vin = 24,	xx = 24-75Vin = 48
xx = 36-75Vin = 48	

Specifications (measured at $T_A = 25^\circ\text{C}$, nominal input voltage, full load and after warm-up)

Input Voltage Range	2:1 / 3:1
Input Filter	PI Network
Output Voltage Accuracy	±1.5% max.
Line Voltage Regulation	±0.5% max.
Load Voltage Regulation (25% to 100% full load)	Single ±0.5% max. Dual ±1.2% max.
Cross Regulation (100%: 25% to 100% full load)	±5% max.
Output Ripple and Noise (with 100n output capacitor and 20MHz BW)	100mVp-p max.
Start-up time	300ms typ.
Worst Case Stabilization Time	1200ms
Operating Frequency (Full Load)	300kHz typ.
Efficiency at Full Load	see Selection Guide
Minimum Load	0%

cont.

ECONOLINE

DC/DC-Converter

with 3 year Warranty

RECOM

15 Watt 2" x 1" Single & Dual Output



E-224736



EN-60950-1 Certified
UL-60950-1 Certified
EN-60601-1 Certified

REC15

Specifications cont. (measured at $T_A = 25^\circ\text{C}$, nominal input voltage, full load and after warm-up)



Input Surge Voltage (100ms max.)	12V Input	36VDC	
	24V Input	50VDC	
	48V Input	100VDC	
Isolation Voltage	/H2 Version (tested for 1 second)	2000VDC	
	/H3 Version (tested for 1 second)	1000VAC / 60Hz	
	(rated for 1 minute)	3000VDC	
	(tested for 1 second)	1500VAC / 60Hz	
	(rated for 1 minute)		
Isolation Capacitance		1200pF typ.	
Isolation Resistance		1 GΩ min.	
Overload Protection		150% typ.	
Short Circuit Protection		Continuous, Auto Restart	
Operating Temperature Range (free air convection)	3:1	-40°C to +65°C (see Graph)	
	2:1	-40°C to +71°C (see Graph)	
Storage Temperature Range		-55°C to +105°C	
Remote On/Off	DC/DC ON	Open or $3.5\text{V} < V_r < 12\text{V}$	
	DC/DC OFF	Short or $0\text{V} < V_r < 1.2\text{V}$	
Temperature Coefficient		±0.05% max.	
Relative Humidity		95% RH	
Case Material		Nickel Plated Metal with Non-Conductive Base	
Thermal Impedance	Natural convection	20°C/W	
Maximum Case Temperature		100°C	
Vibration		10-55Hz, 2G, 30mins along X,Y & Z	
Package Weight		27g	
Packing Quantity		10 pcs per Tube	
MTBF (+25°C)	} Detailed Information see Application Notes chapter "MTBF"	using MIL-HDBK 217F	>700 x 10 ³ hours
		using MIL-HDBK 217F	>150 x 10 ³ hours
(+71°C)			
Certifications			
EN General Safety	Report: PS090302950C2	EN60950-1:2006	
UL General Safety	Report: E224736	UL 60950-1 1st Ed.	
		C22.2 No. 60950-1-03	
EN/CB Medical Safety	Report: MDD1206085 + RM1206058	IEC/EN60601-1 3rd. Ed.	
	Medical Report + ISO14971 Risk Assessment		

Derating-Graph (Ambient Temperature)

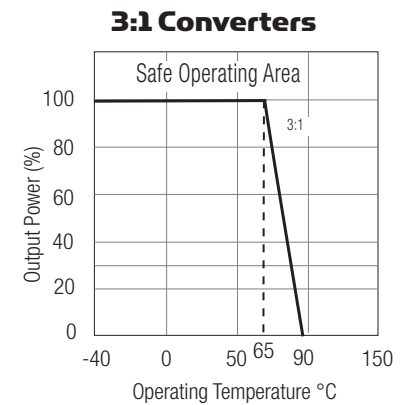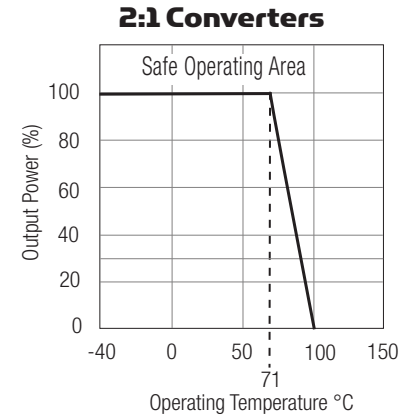


Note: Refer to Application Notes for EMC Class B Filter suggestion

Package Style and Pinning (mm)

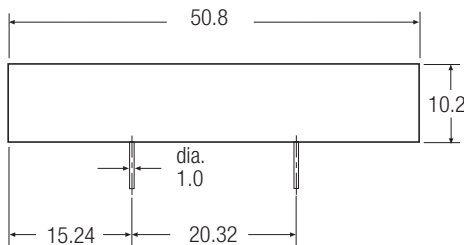

2" x 1" Package

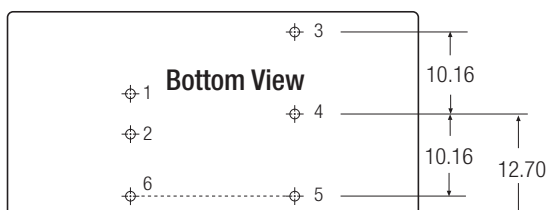

Pin Connections

Pin #	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
3	+Vout	+Vout
4	No Pin	Com
5	-Vout	-Vout
6	CTRL	CTRL

XX.X ± 0.5 mm
XX.XX ± 0.35 mm