

6

5


4

3

2


1

FEMALE INSERT
FRONT VIEW




1 BROWN
2 WHITE
3 BLUE
4 BLACK

MALE INSERT
FRONT VIEW



1 BROWN
2 WHITE
3 BLUE
4 BLACK

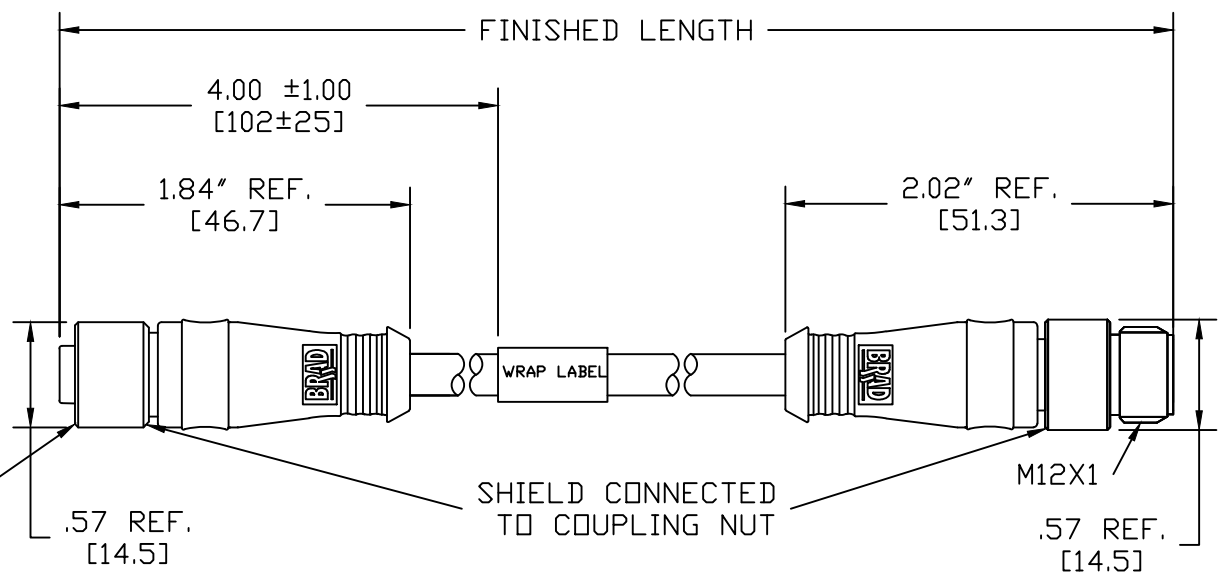

884S30D04MXXX

Wire type
22/4C AWG
Black PVC

cable length
M020----2 Meter
M100----10 Meter

MECHANICAL
OVERMOLD: GRAY PBT w/ CONDUCTIVE MATERIAL
INSERT: BLACK CELANEX
SHIELD HOUSING: NICKEL PLATED BRASS
O-RING: RED NITRILE
CONTACTS: COPPER ALLOY, GOLD OVER NICKEL
COUPLING NUT: NICKEL-PLATED BRASS
CABLE: #22-4 BLACK PVC W/ BRAIDED SHIELD & 22AWG DRAIN

ELECTRICAL
RATINGS: 250V AC/DC, 4A

ENVIRONMENTAL
PROTECTION: IP67
TEMPERATURE: -20°C to 105°C

RELEASED EC NO: IPC2014-0374 DRWN: BARDEN 2013/08/28 CHKD: VOU APPR: JFMURPHY 2013/10/30	DESCRIPTION REV A	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
		$\nabla=0$ $\sphericalangle=0$	mm	INCH	IN/MM	NTS	INCH		
		4 PLACES	±---	±---	DRAWN BY DATE	TITLE	MICRO CHANGE ASSEMBLY 4-POLE MALE/FEMALE ST/ST 360 SHLD		
		3 PLACES	±---	±.005	TWOLDEGE 2012/06/20				
2 PLACES	±0.13	±.010	CHECKED BY DATE	MOLEX INCORPORATED SD-120069-027					
1 PLACE	±0.25	±.020	---						
ANGULAR ±1/2°			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPROVED BY DATE	DOCUMENT NO.		SHEET NO.	
					JFMURPHY 2013/10/30	SD-120069-027		1 OF 1	
					MATERIAL NO.	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

					SIZE A				

6

5

4

3

2

1

E

E

D

D

C

C

B

B

A

A