


Power PCB Relay T9V Solar

- 1 pole 40A, 1 form A (NO) contact
- Contact gap >1.8mm (suffix S)
- 350mW hold power¹⁾
- Ambient temperature up to 85°C at 35A
- The appliance is able to meet VDE V 0126-1-1
- Product in accordance to IEC 60335-1
- EN61095: AC7a at 85°C



f0156_bc_inv

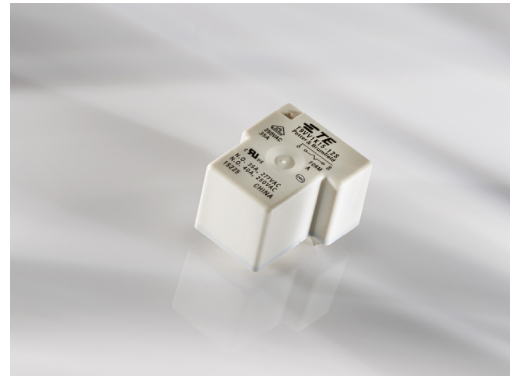

Typical applications

- Electrical vehicle loading stations
- Electrical vehicle
- Photovoltaic inverter

Approvals

VDE 40030974, UL E58304, CQC16002145203, TUV R50369970
Technical data of approved types on request

Contact Data

Contact arrangement	1 form A (NO)
Contact gap	>1.8mm
Rated voltage	277VAC (1.8mm gap)
Rated current	40A ²⁾
Breaking capacity max.	10 000 VA
Contact material	AgNi
Initial contact resistance	75mΩ max. at 1A 6VDC
Frequency of operation, with/without load	6/300min ⁻¹
Operate/release time max., incl bounce time	18/15ms

Contact ratings³⁾

Type	Contact	Load	Cycles
IEC 61810			
T9VV1K15-12S	A (NO)	35A, 250VAC, cosφ=1, 85°C	20x10 ³
UL 508			
T9VV1K15-12S	A (NO)	35A, 250VAC, resistive, 85°C	20x10 ³
T9VV1K15-12S	A (NO)	40A, 30VDC, resistive, 70°C	60x10 ³
CQC			
T9VV1K15-12S	A (NO)	40A, 250VAC, resistive, 60°C	20x10 ³
TUV			
T9VV1K15-12S	A (NO)	40A, 30VDC, resistive, 70°C	60x10 ³
Mechanical endurance, DC coil		5x10 ⁵ operations	

Coil Data

Rated coil voltage	12VDC
Coil insulation system according UL	class F

Coil versions, DC coil

Coil code	Rated voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance Ω±10%	Rated power W
12	12 ¹⁾	9.6	0.8	64+10%	2.25 / min. 0.35 hold

All figures are given for coil without pre-energization, at ambient temperature +23°C.
Other coil voltages on request.

Insulation Data

Initial dielectric strength	
between open contacts	2500V _{rms}
between contact and coil	4000V _{rms}
Initial surge withstand voltage	
between contact and coil	6kV
Clearance/creepage	
between contact and coil	3/4mm
Material group of insulation parts	III
Tracking index of relay base	PTI 325

Other Data


Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at www.te.com/customer-support/rohssupportcenter

Ambient temperature	-40 to +85°C ²⁾
Category of environmental protection	IEC 61810
	RTII - flux proof
Vibration resistance (functional)	10g
Shock resistance (functional)	10g
Shock resistance (destructive)	100g
Terminal type	PCB-THT
Mounting	see note ²⁾
Mounting distance	≥10mm
Weight	appr. 30g
Resistance to soldering heat THT	
IEC 60068-2-20	260°C/5s
Packaging unit	box/500 pcs.

- 1) After the energization time of 100ms with 12 VDC the coil requires a reduction of the coil voltage to 4.7...6.0 VDC.
- 2) The relay connections and wiring have to be designed with an adequate cross sections to ensure the current flow and heat dissipation.
- 3) Contact ratings with relay properly vented.



Power PCB Relay T9V Solar (Continued)

Dimensions

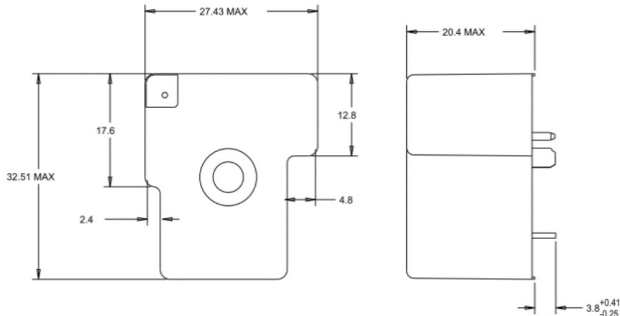

PCB layout / terminal assignment

Bottom view on solder pins

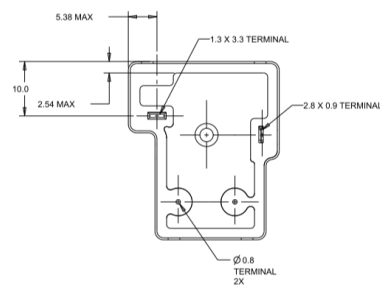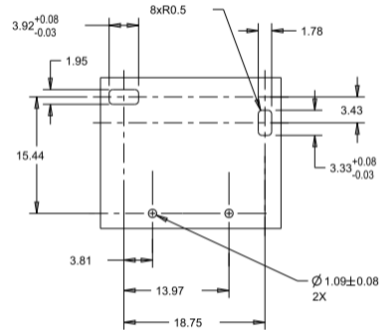

WIRING DIAGRAM (BOTTOM VIEW)



1 FORM A

Notes

1) General tolerance

Diagram Dimension	Tolerance
< 1 mm	±0.1
1 ~ 3 mm	±0.2
> 3 mm	±0.3

2) Dimensions of the pins after tin soldering

- a) +0.4 for the width and the thickness
- b) +1.0 for the length

Product code structure

Typical product code



Type T9V Power Relay T9V Series	T9V	V	1	K	1	5	-12	S
Enclosure V Flux-proof plastic case S Wash tight								
Contact arrangement 1 1 Form A (1NO)								
Coil input K DC coil, 2.25W								
Mounting and termination 1 PCB mounting; PCB terminals for coil and contacts								
Contact material 5 AgNi								
Coil voltage Coil code: Please refer to coil version table								
Contact gap blank 1.5mm contact gap S 1.8mm contact gap								

Product code	Version	Contact arrangement	Contact material	Contact gap	Coil	Part Number
T9V1K15-12S	PCB, flux tight	1 form A (NO) contact	AgNi	>1.8mm	12VDC	2027395-5

Note. This list represents the most common types and does not show all variants covered by this datasheet, other types on request.