


.XXX ±0.05


THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER			
ORIGINAL			

(1)

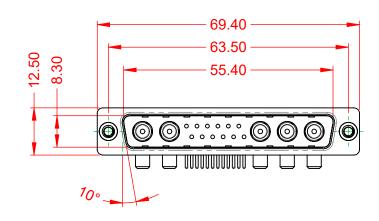




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

OPERATING TEMPERATURE:

WITHSTANDING VOLTAGE:


THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ" GOLD PLATED



40A (CURRENT) POWER/CO-AX CONTACT RATING: (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX. $5000M\Omega$ min. **INSULATOR RESISTANCE:** DIELECTRIC

1000V AC rms

-55°C ~ 125°C



		SW REFERENCE NO.: 629 COMBO ASSEMBLY			
	COMBINATION D-SUB		DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
		SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 629-17W	5640-4N2	ISSUE
Y			PART NUMBER: 629-17W	5640-4N2	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

