


REVISIONS				
REV	ECR	DESCRIPTION	DRAWN	DATE
1		ENGINEERING RELEASE	P. BURDGE	07/22/2020

-XX IN THE ENDING OF THE CABLE PART NUMBER IS CALLING OUT THE LENGTH OF THE ASSEMBLY FROM CENTER TO CENTER OF CONNECTORS. EXAMPLE(S) SHOWN BELOW:

LTI P/N: CB0.81-2IPX-3IN (3 INCHES)
 CB0.81-2IPX-12.5IN (12.5 INCHES)



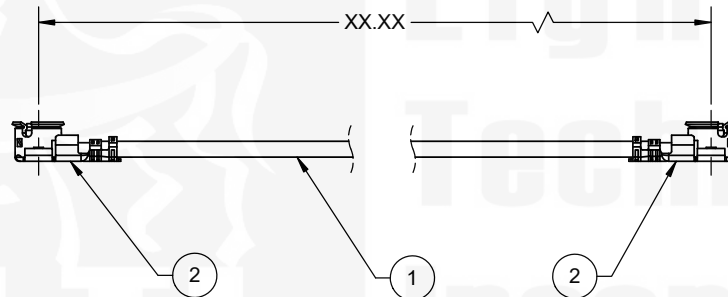

LENGTH TOLERANCE FOR CABLE ASSEMBLIES	
Inches	Millimeters
0 - 2IN +/- 0.040	0 - 51 +/- 1
2IN - 6IN +/- 0.080	51 - 153 +/- 2
6IN - 12IN +/- 0.140	153 - 305 +/- 3.5
12IN - 48IN +/- 0.250	305 - 1219 +/- 6.4
48IN - 144IN (12FT) +/- 0.500	1219 - 3658 +/- 13
144IN (12FT) - ABOVE +/- 1.0	3658 - ABOVE +/- 25

UNLESS OTHERWISE SPECIFIED ON DRAWING

ITEM	PART NUMBER	DESCRIPTION	QTY
1	0.81MM MICRO COAX	CABLE, 0.81 MICRO COAX, WHITE	AR
2	IPXLF11GPB-081	IPX (MHF1), RHT ANGLE, JACK, CABLE CRIMP	2

MHF IS A REGISTERED TRADEMARK OF I-PEX CO., LTD. CORPORATION

DO NOT SCALE DRAWING		 Lighthouse Technologies San Diego, CA WWW.RFCONNECTOR.COM
TOLERANCES UNLESS OTHERWISE SPECIFIED		
DIMENSIONS ARE IN MILLIMETERS		TITLE: CABLE ASSEMBLY, IPX (MHF1), R/A JACK, CRIMP TO IPX (MHF1), R/A JACK, CRIMP USING 0.81 MICRO COAX, WHITE
X = ±0.5 X.X = ±0.25 X.XX = ±0.13 ANGLE = ±30°		
 THIRD ANGLE PROJECTION		SIZE PART/DWG. NO: B CB0.81-2IPX-XXIN REV 1
CUSTOMER APPROVAL		
SIGN / DATE:		SCALE: 4:1 FILE NAME SHEET 1 OF 1
ENG APPR.		
CHECKED		
DRAWN	P. BURDGE	07/22/2020
	NAME	DATE

PROPRIETARY AND CONFIDENTIAL

UNLESS OTHERWISE SPECIFIED: THIS DOCUMENT CONTAINS LIGHTHORSE TECHNOLOGIES INFORMATION. REPRODUCTION, USE, DISCLOSURE OR TRANSMITTAL OF ALL OR ANY PART OF THIS DOCUMENT IS PROHIBITED EXCEPT TO THE EXTENT APPROVED IN WRITING BY AN AUTHORIZED REPRESENTATIVE OF LIGHTHORSE TECHNOLOGIES. LIGHTHORSE TECHNOLOGIES RESERVES ALL RIGHTS UNDER PATENTS, TRADEMARKS, COPYRIGHTS AND TRADE SECRETS. COPY RIGHTS OF LIGHTHORSE TECHNOLOGIES 2011, ALL RIGHTS RESERVED.

