


# Washer Thermocouples with Flexible Leads A6 Series



Washer thermocouples are designed to measure true average temperature of the washer. Conduction errors are minimized by welding the thermocouple elements at 180 degrees.

**NOTES:**

- Similar units are available using split lock washers.
- Termination styles: bare wire, standard size, or mini connectors are available.
- If lead lengths longer than 36 inches are required, specify your length requirement.
- Standard insulation material is fiberglass (which is good to 900 degrees Fahrenheit operation).

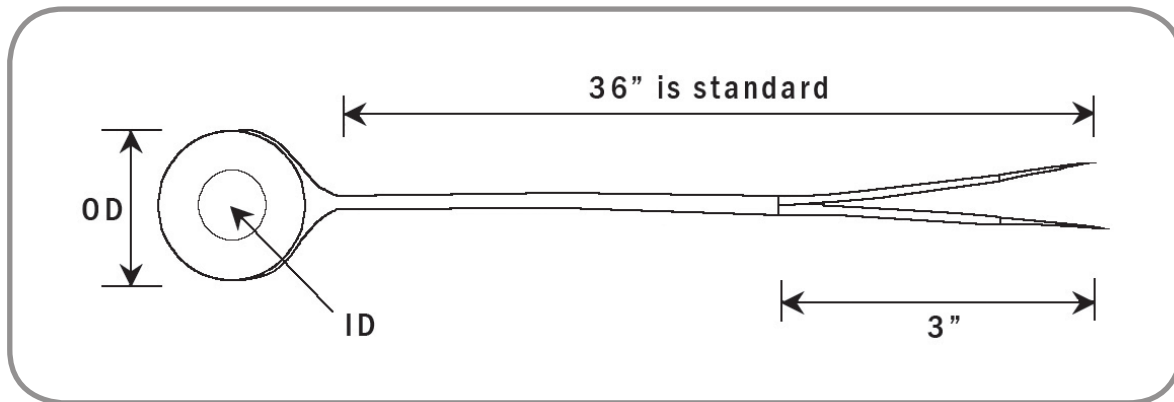

Specifications							
Part No.	Type	Washer		Part No.	Type	Washer	
		ID (in.)	OD (in.)			ID (in.)	OD (in.)
A6-1	J	1/8	5/16	A6-11	K	1/8	5/16
A6-2	J	3/16	7/16	A6-12	K	3/16	7/16
A6-3	J	1/4	5/8	A6-13	K	1/4	5/8
A6-4	J	3/8	7/8	A6-14	K	3/8	7/8
A6-5	J	1/2	1-1/4	A6-15	K	1/2	1-1/4
A6-6	T	1/8	5/16	A6-16	E	1/8	5/16
A6-7	T	3/16	7/16	A6-17	E	3/16	7/16
A6-8	T	1/4	5/8	A6-18	E	1/4	5/8
A6-9	T	3/8	7/8	A6-19	E	3/8	7/8
A6-10	T	1/2	1-1/4	A6-20	E	1/2	1-1/4