


|                 |                |
|-----------------|----------------|
| COIL: @ 25° C   |                |
| RESISTANCE      | 200 OHMS ± 10% |
| NOMINAL VOLTAGE | 12.6 VDC       |
| MUST OPERATE    | 6.8 VDC        |
| MUST RELEASE    | .74 VDC        |

ENVIRONMENT:  
 VIBRATION 10 CPS TO 2000 CPS @ 20 g's  
 SHOCK 100 g's 6 MS. DURATION  
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE TIME 5 MS MAX.  
 CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

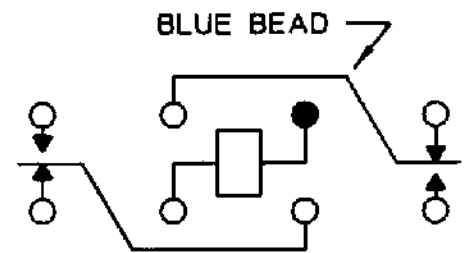

CONTACT RATING: LOW LEVEL TO 3 AMPS  
 RESISTIVE 28 VDC 100,000 OPERATIONS

DR. R.B. 5/24/94 CKS/25/040AB

**COMMUNICATIONS INSTRUMENTS, INC.**

CUST. C.I.I. STD.  
 CUST. NO. \_\_\_\_\_

TYPE "FW" RELAY

FW1120D00