

Features

- Universal AC input (85-264VAC)
- Protections: SCP, OVP, OLP, OTP
- DC OK indicator LED with relay contacts
- 150% (180W) peak load capacity
- Built-in active PFC, PF>0,95
- High efficiency up to 92.5%

DIN Rail Series

REDIN120

120 Watt DIN-Rail Power Supply



Description

These DIN-rail mounted power supplies have a robust case, 4mm screw terminal connectors and use high reliability components to give a long, trouble-free life. The REDIN120 can be end mounted to save rail space or side mounted for use in low-profile cabinets. The units can deliver up to 150% start-up power and allow n+1 parallel operation to increase the continuous output current or for supply redundancy. Relay contacts simplify DC OK monitoring. The REDIN120 series is designed for demanding commercial and industrial applications with UL508, UL60950, IEC60950 CB report and CE (LVD + EMC + RoHS) certifications. They come with a full 5-year warranty.

Selection Guide

| Part Number | nom. Input Voltage Range | Output Voltage | Output Adjustability | Rated Current | Efficiency typ. 230VAC full load |
|-------------|--------------------------|----------------|----------------------|---------------|----------------------------------|
| | [VAC] | [VDC] | [VDC] | [A] | [%] |
| REDIN120-12 | 100-240 | 12 | 12-14 | 8.33 | 89.5 |
| REDIN120-24 | 100-240 | 24 | 24-28 | 5 | 91.5 |
| REDIN120-48 | 100-240 | 48 | 48-56 | 2.5 | 92.5 |

Specifications (measured @ T_a= 25°C, rated Vin, rated load and after warm up)

BASIC CHARACTERISTICS

| Parameter | Condition | Min. | Typ. | Max. |
|---------------------------------|--|--------------|-------------------|----------------------|
| Input Voltage Range | | 85VAC | | 264VAC |
| Absolute Maximum Input Voltage | max. 3s | | | 300VAC 375VDC |
| Input Current | 115VAC, full load 230VAC, full load | | | 1.5A 0.65A |
| Return Voltage Immunity | 12Vout 24Vout 48Vout | | 18V 35V 65V | |
| Inrush Current | 115VAC, cold start 230VAC, cold start | | 40A 60A | |
| No Load Power Consumption | 115VAC 230VAC | | 1.5W 1.2W | 3W 3W |
| Input Frequency Range | | 47Hz | | 63Hz |
| Output Voltage Trimming | | | | +16.67% |
| Power Factor | 115VAC 230VAC | | 0.99 0.95 | |
| Start-up time | 115VAC, full load 230VAC, full load | | | 500ms 250ms |
| Hold-up time | 115VAC, full load 230VAC, full load | 20ms 20ms | 40ms 40ms | |
| Ripple and Noise ⁽¹⁾ | 0 - 70°C -25°C | 12Vout | | 100mVp-p 200mVp-p |
| | 0 - 70°C -25°C | 24Vout | | 120mVp-p 240mVp-p |
| | -25°C - 70°C | 48Vout | | 240mVp-p |

Notes:

Note1: Measured at 20MHz bandwidth by using a 12" twisted pair-wire terminated with a 0.1µF & 10µF parallel capacitor

continued on next page




UL60950-1 certified
UL508 certified
IEC/EN60950-1 certified
EN55024/32 compliant


Specifications (measured @ $T_a = 25^\circ\text{C}$, rated V_{in} , rated load and after warm up)

REDIN120-12


Efficiency vs. Load

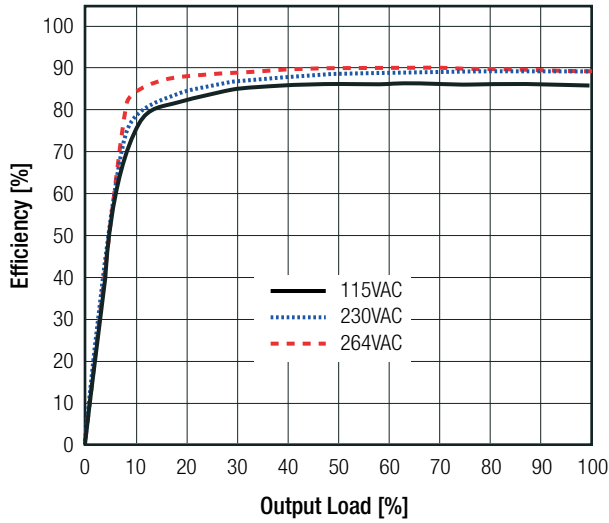


Power Dissipation vs Load

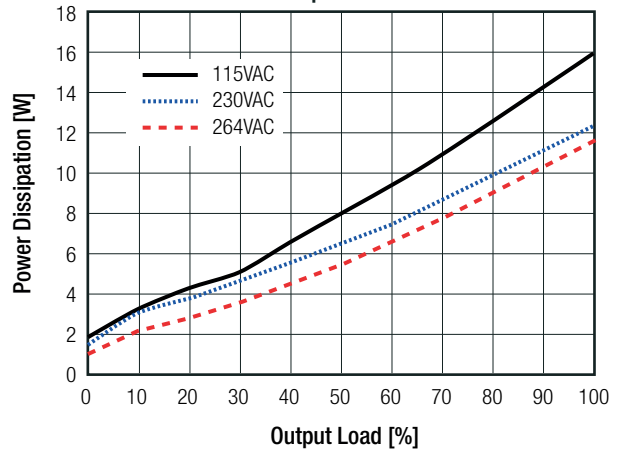

Input Current vs Load

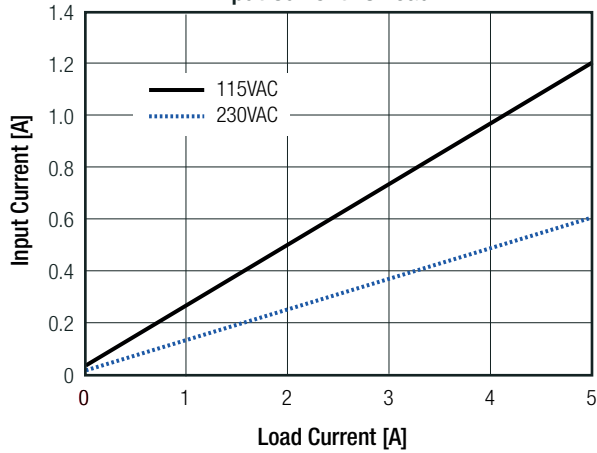


Power Factor vs Load over V_{in}

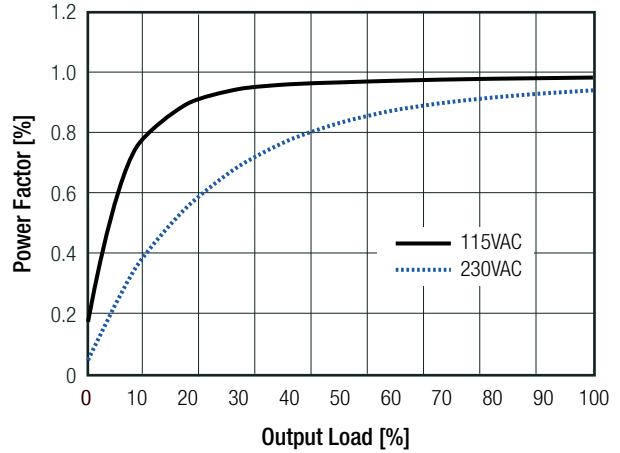


REDIN120-24

Efficiency vs. Load

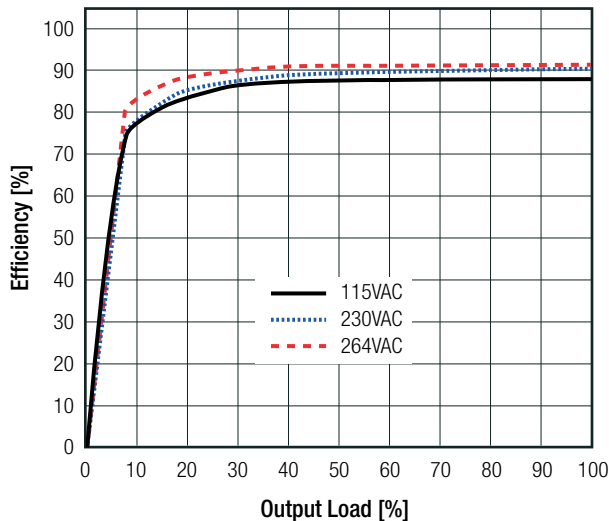



Power Dissipation vs Load

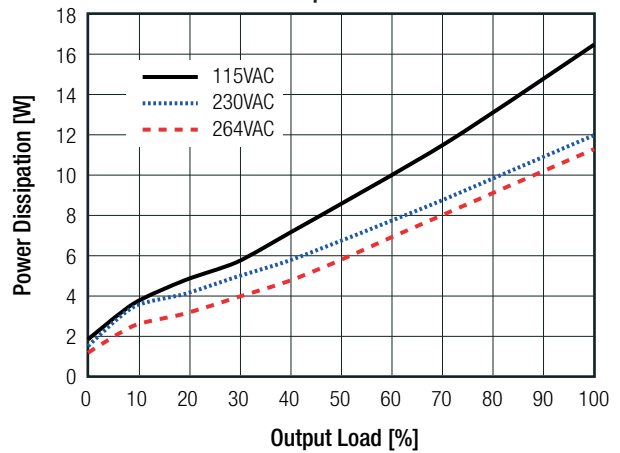





continued on next page

Specifications (measured @ $T_a = 25^\circ\text{C}$, rated V_{in} , rated load and after warm up)

REDIN120-24

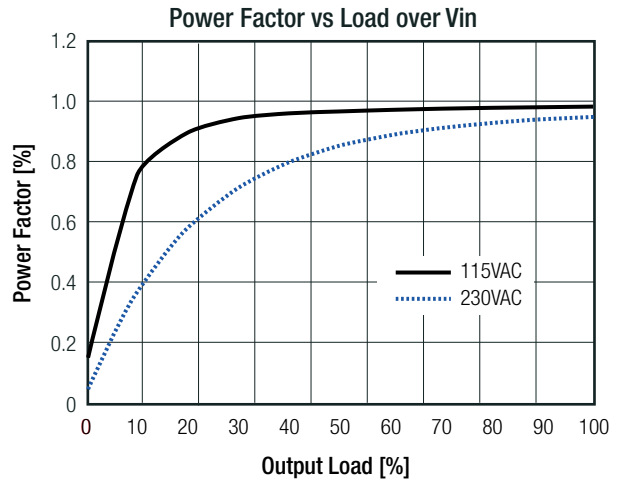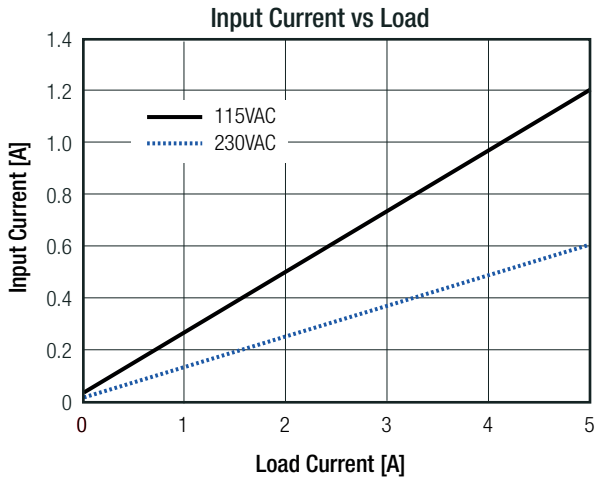

REDIN120-48

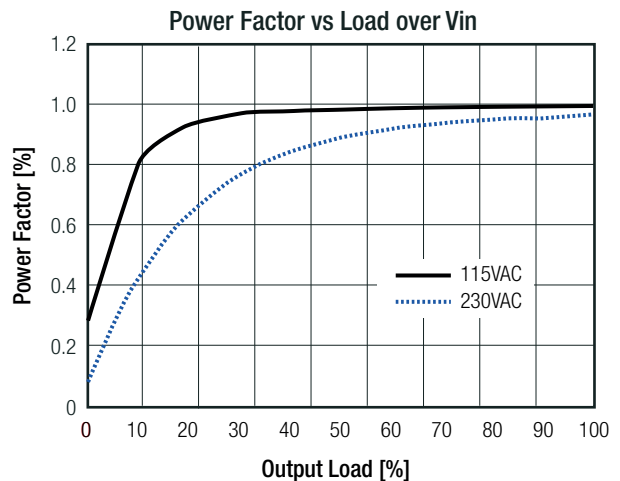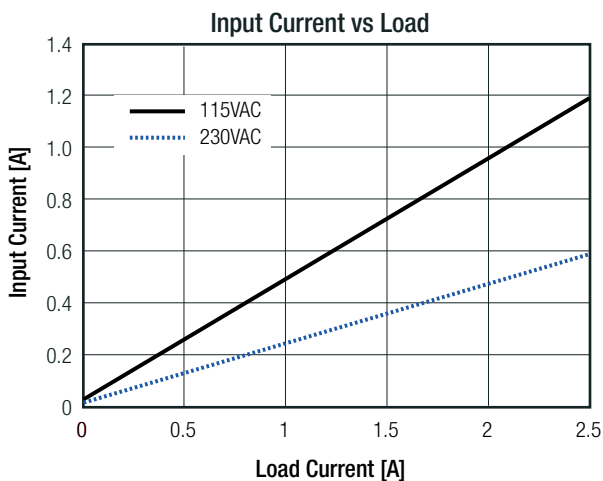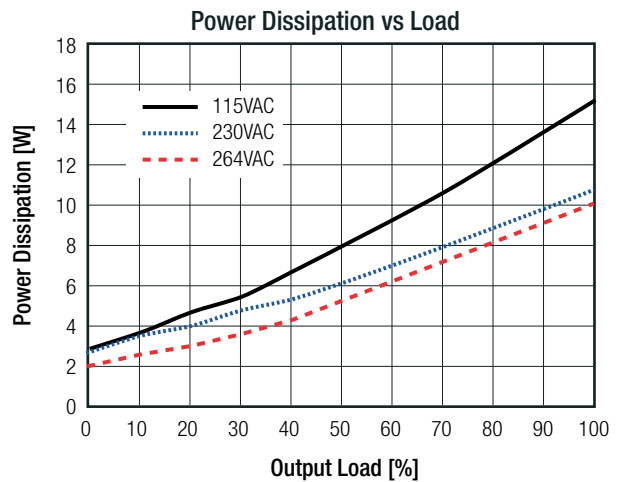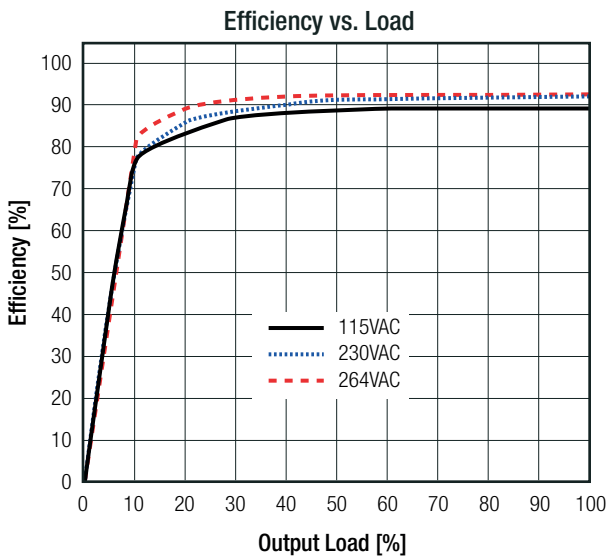

Specifications (measured @ T_a= 25°C, rated Vin, rated load and after warm up)


| REGULATION | | |
|--------------------|------------------------|-------------------------|
| Parameter | Condition | Value |
| Output Accuracy | | ±0.25% typ. / ±1% max. |
| Line Regulation | | ±0.1% typ. / ±0.5% max. |
| Load Regulation | 0% to 100% load | 0.25% typ. / 1.0% max. |
| Transient Response | 100Hz & 1kHz, 50% duty | ±1% typ. / ± 5% max. |

| PROTECTION | | |
|-----------------------------------|------------------------|--|
| Parameter | Condition | Value |
| Input Fuse ⁽²⁾ | internal | T5A, slow blow type |
| Short Circuit Protection (SCP) | | hiccup mode (current limit) |
| Over Voltage Protection (OVP) | 12Vout | 15-18VDC, hiccup mode |
| | 24Vout | 29-33VDC, hiccup mode |
| | 48Vout | 58-65VDC, hiccup mode |
| Over Voltage Category (OVC) | | OVC II |
| Over Load Protection (OLP) | | Constant power (current limit) |
| Over Temperature Protection (OTP) | | 100±5°C, detect on Heat-sink of power transistor; shut down O/P, auto recovery after temperature goes down |
| Power OK LED | ON (green) | Vout up to 90% of rated Vout |
| | OFF (red) | Vout down to 80% of rated Vout |
| Isolation Voltage | Relay Contact Rating | Max. 30V/1A or 60V/0.3 or 30VAC/0.3A Resistive Load |
| | I/P to O/P | 3.0kVAC / 1 minute |
| | I/P to PE | 2.5kVAC / 1 minute |
| Isolation Resistance | O/P to PE | 0.5kVAC / 1 minute |
| | | 10MΩ min. |
| Leakage Current | I/P to O/P | 0.1mA typ. / 0.25mA max. |
| | I/P to PE, 240VAC 50Hz | 1.0mA max. |

Notes:

Note2: Refer to local safety regulations if input over-current protection is also required

Overload Capability

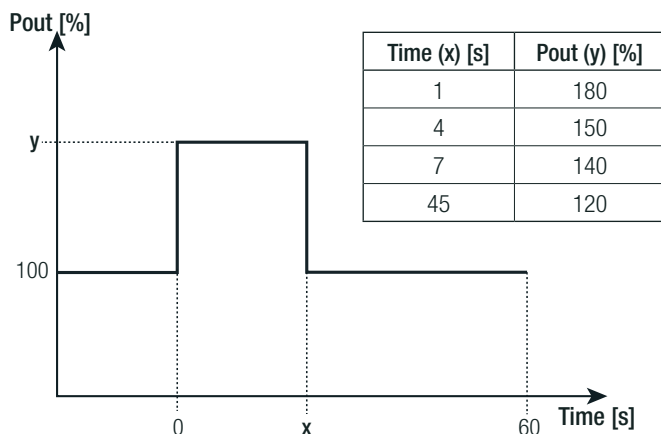

Maximum loading of automatic circuit breakers

| Circuit Breaker | Circuit Breaker Current | | | |
|-----------------|-------------------------|------------|--------------------------|--------------------------|
| | Typ | Single Use | Parallel Use (2 devices) | Parallel Use (3 devices) |
| B | | 6A | 6A | 13A |
| C | | 10A | 10A | 16A |

Note: Values could change depending on local mains

ENVIRONMENTAL


| Parameter | Condition | Value |
|--|-----------------------------|---------------------------|
| Operating Temperature Range ⁽³⁾ | @ natural convection 0.1m/s | full load |
| | | refer to „Derating Graph“ |
| Temperature Coefficient | | -25°C to +55°C |
| Operating Altitude ⁽⁴⁾ | | -25°C to +70°C |
| Operating Humidity | non-condensing | 0.03%/K |
| | | 3000m |
| | | 20% - 90% RH |

continued on next page


Specifications (measured @ T_a= 25°C, rated Vin, rated load and after warm up)

| ENVIRONMENTAL | | |
|-----------------------|---|---------------------------------|
| Parameter | Condition | Value |
| IP Rating | | IP20 |
| Pollution Degree (PD) | | PD2 |
| Shock | | 10-500Hz 2G, 60min. |
| Vibration | | 10G /11ms, along x,y and z axis |
| MTBF | according to MIL-HDBK-217F, full load, 25°C | 300 x 10 ³ hours |

Derating Graph

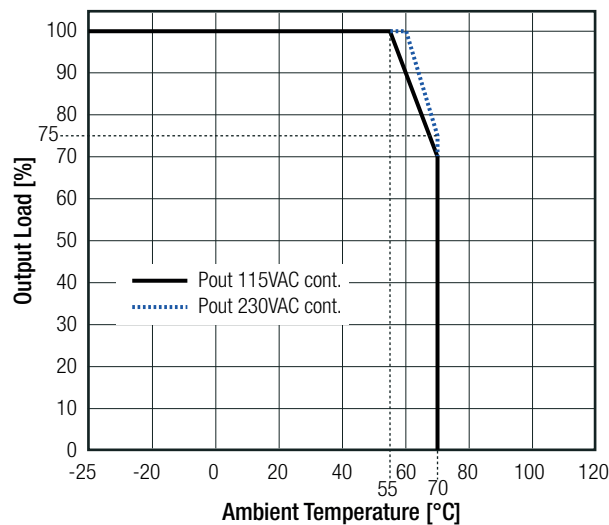

Operating Altitude

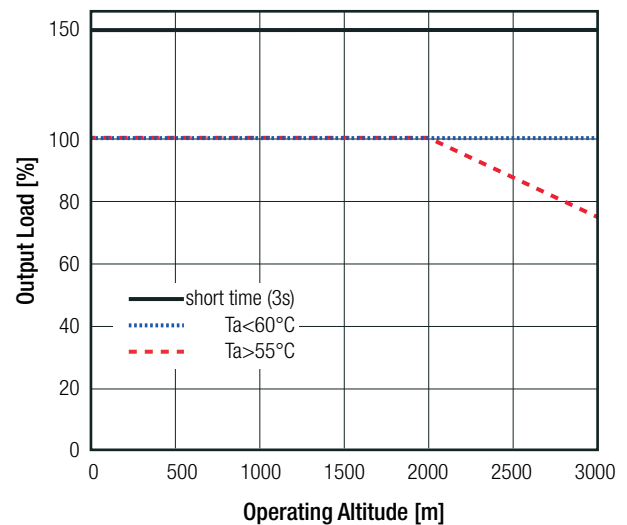

Notes:

- Note3: UL Report certified temperature range: -25°C to +50°C. According to RECOM internal qualification the device is rated up to +70°C with derating
- Note4: UL Report certified operating altitude: 5000m. According to RECOM internal qualification the device is rated up to 3000m. For altitude higher than 2000m, derating 30W for every 1000m, or 5°C/1000m

SAFETY AND CERTIFICATIONS

| Certificate Type | Report / File Number | Standard |
|--|----------------------|---|
| Information Technology Equipment, General Requirements for Safety | E224736 | UL60950-1, 2nd Edition, 2014 CSA C22.2 No. 60950-1-07, 2nd Edition, 2014 |
| Industrial Control Equipment | E470721 | UL508, 17th Edition, 2013 CSA C22.2 No. 107.1-01, 3rd Edition, 2011 |
| Information Technology Equipment - General Requirements for Safety (CB) | SA1508106S 001 + 002 | IEC60950-1, 2nd Edition 2005, + AM2:2013 |
| Information Technology Equipment - General Requirements for Safety (LVD) | | EN60950-1:2006, + A2:2013 |
| EAC | RU-AT.37.02367 | TP TC 004/2011 |
| RoHS2 | | RoHS 2011/65/EU |

| EMC Compliance | Report / Condition | Standard / Criterion |
|--|--------------------|-------------------------------------|
| Electromagnetic compatibility of multimedia equipment – Emission Requirements | | EN55032: 2015 |
| Information technology equipment - Immunity characteristics - Limits and methods of measurement | | EN55024:2010 + A1:2015 |
| Limitations on the amount of electromagnetic interference allowed from digital and electronic devices | | 47 CFR FCC Part 15, Subpart B: 2014 |
| Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz | | ANSI C63.4: 2014 |

continued on next page





Specifications (measured @ T_a= 25°C, rated V_{in}, rated load and after warm up)

| EMC Compliance | Report / Condition | Standard / Criterion |
|---|---|--|
| ESD Electrostatic discharge immunity test | Air ±8kV, Contact ±4kV | EN61000-4-2, 2009, Criteria B |
| Radiated, radio-frequency, electromagnetic field immunity test | 3V/m | EN61000-4-3, 2006, Criteria A |
| Fast Transient and Burst Immunity | AC Power Port: L+N+PE ±1kV | EN61000-4-4, 2012, Criteria A |
| Surge Immunity | AC Power Port L-N ±1kV, L-PE + N-PE ±2kV | EN61000-4-5, 2014, Criteria B |
| Immunity to conducted disturbances, induced by radio-frequency fields | AC Power Port 3V | EN61000-4-6, 2014, Criteria A |
| Power Magnetic Field Immunity | 50Hz, 1A/m | EN61000-4-8, 2010, Criteria A |
| Voltage Dips and Interruptions | Voltage Dips >95% Voltage Dips 30% Voltage Interruptions >95% | EN61000-4-11, 2004, Criteria A EN61000-4-11, 2004, Criteria A EN61000-4-11, 2004, Criteria C |
| Limits of Harmonic Current Emissions | | EN61000-3-2, 2014, Criteria A |
| Voltage Fluctuations & Flicker | | EN61000-3-3, 2013, Clause 5 |

DIMENSION and PHYSICAL CHARACTERISTICS


| Parameter | Type | Value |
|-------------------|-----------------------|----------------------------------|
| Material | case cover | aluminium nickel plated steel |
| Dimension (LxWxH) | without mounting clip | 114.5 x 33.0 x 124.4mm |
| Weight | | 590g typ. |

Dimension Drawing (mm)

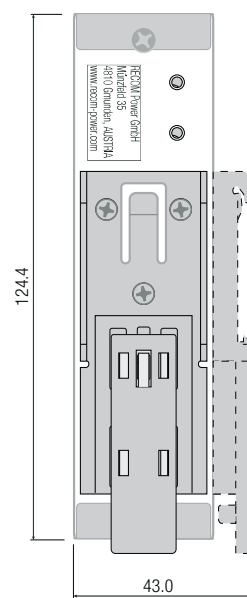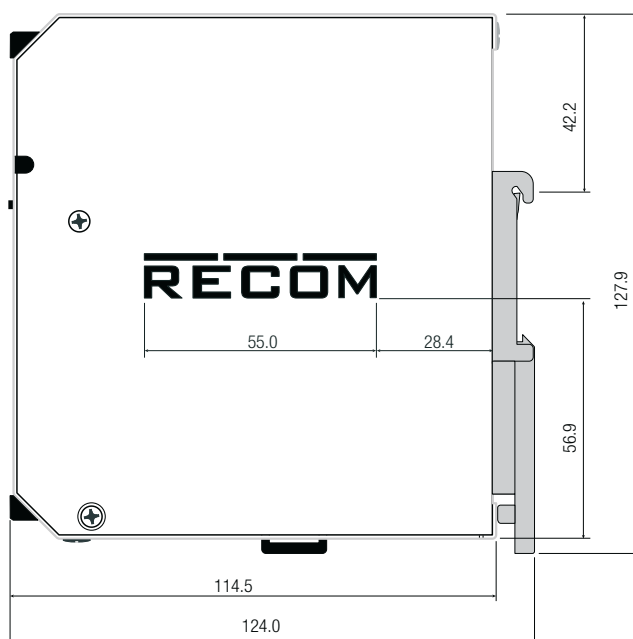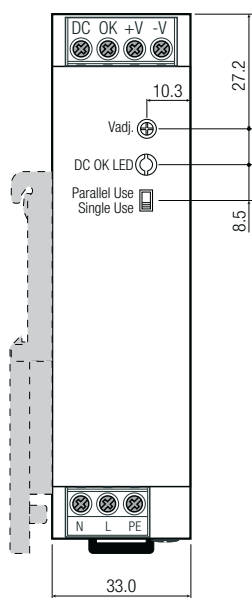

continued on next page


Specifications (measured @ $T_a = 25^\circ\text{C}$, rated V_{in} , rated load and after warm up)

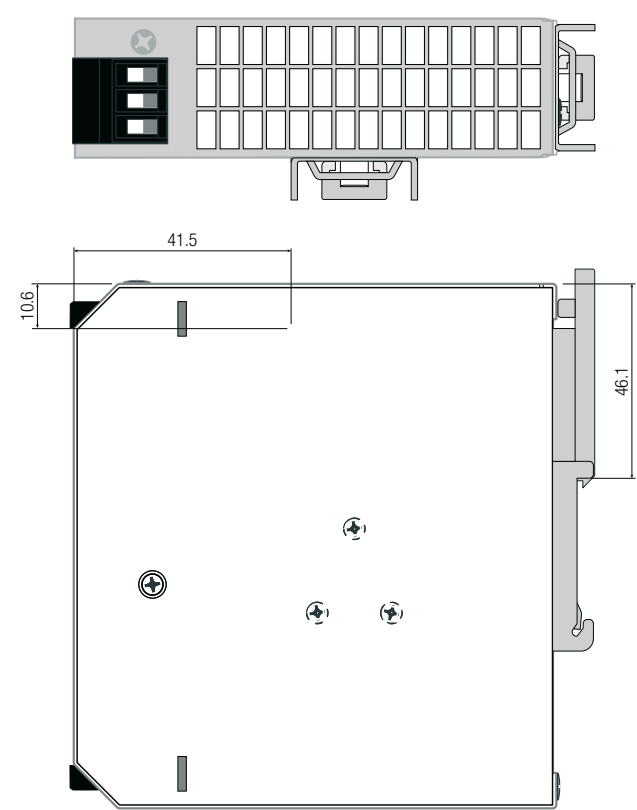

| Terminals and Wiring | |
|---------------------------------------|----------------------|
| Type | Screw Connector |
| Solid Wire | 2.5-6mm ² |
| Stranded Wire | 2.5-4mm ² |
| American Wire Gauge (AWG) | AWG10-16 |
| Wire Stripping Length | 8mm |
| Screwdriver (slotted / cross) | 3.5mm |
| Recommended tightening torque | 0.5Nm-0.8Nm |
| Tolerance: X.X ±0.5mm X.XX ±0.25mm | |

INSTALLATION and APPLICATION

Mounting Instruction

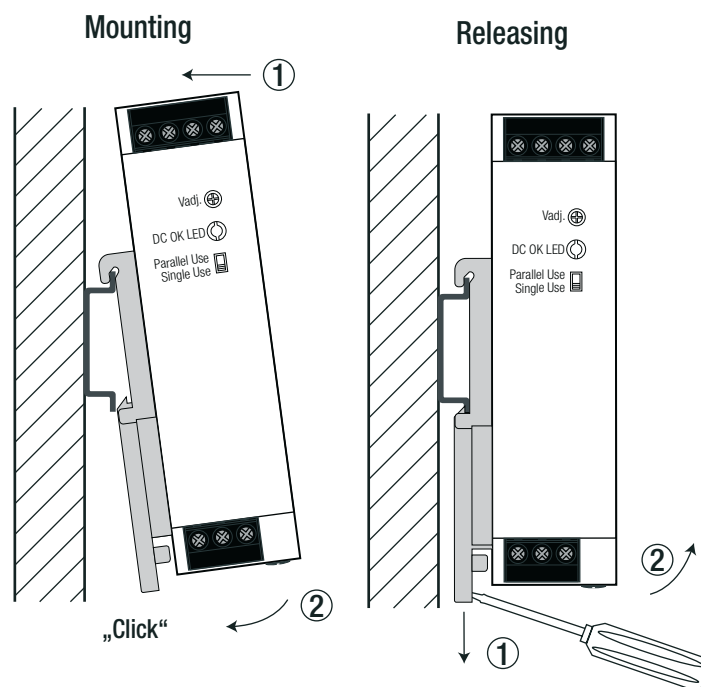


continued on next page


Specifications (measured @ $T_a = 25^\circ\text{C}$, rated V_{in} , rated load and after warm up)

INSTALLATION and APPLICATION

Mounting Multiple Power Supplies

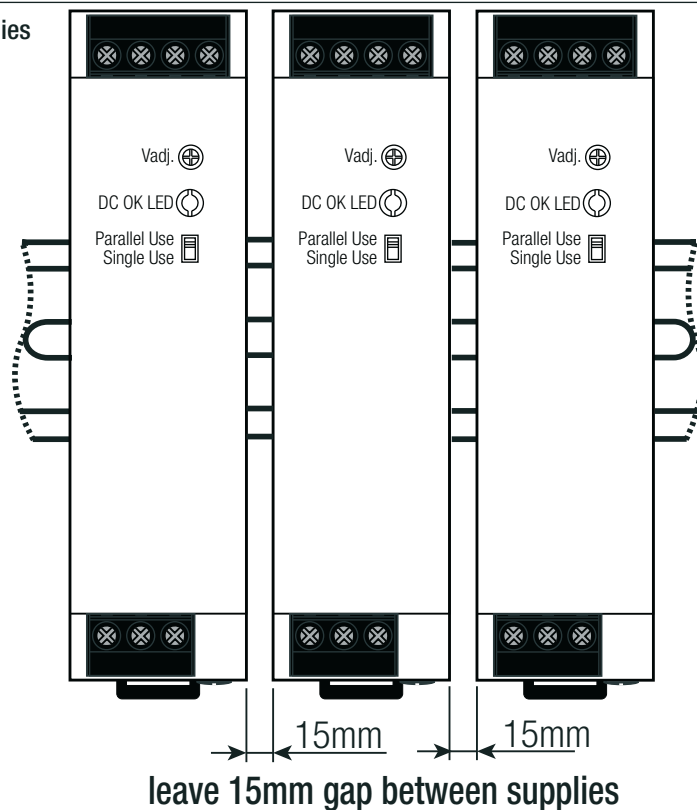

PARALLEL OPERATION

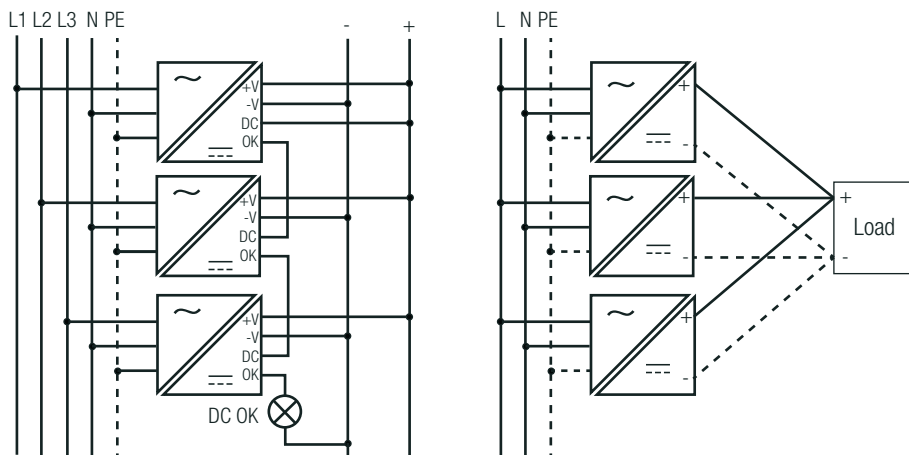

Single Operation:

- 1) Make sure that the front panel switch is set to "single Use."
- 2) The output voltage can be increased by trim pot to compensate any cable losses.

Parallel Operation:

- 1) Make sure that the front panel switch is set to "single Use" on each power supply.
- 2) Adjust each power supply to the exact same output voltage with same load and cooling conditions.
- 3) Set the front panel switches to "Parallel Use." Use the same wire length for each power supply (star connection) and energize all units at the same time to avoid triggering overload protection.


Derate the maximum output power to 90% of nominal ratings.

For operation with more than three power supplies in parallel or series operation, please contact RECOM technical support for advice.

continued on next page

Specifications (measured @ $T_a = 25^\circ\text{C}$, rated V_{in} , rated load and after warm up)

BLOCK DIAGRAMM

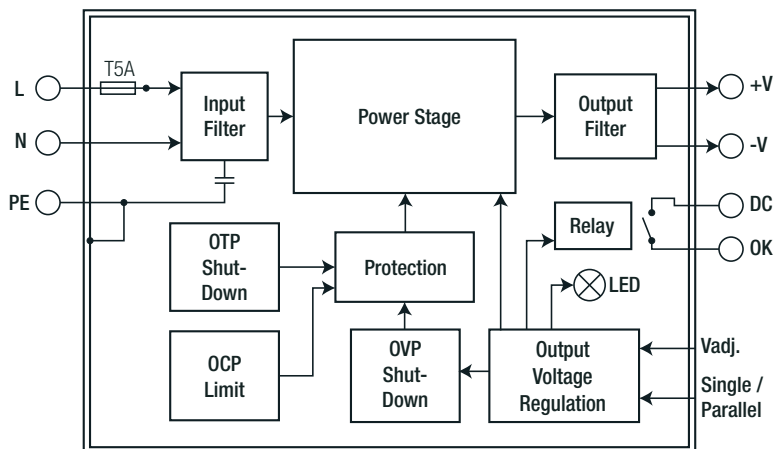

PACKAGING INFORMATION

| Parameter | Type | Value |
|-----------------------------|---------------|------------------------|
| Packaging Dimension (LxWxH) | cardboard box | 140.0 x 50.0 x 142.0mm |
| Packaging Quantity | cardboard box | 1pcs |
| Storage Temperature Range | | -40°C to +85°C |
| Storage Humidity | | 5% - 95% RH |

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.