

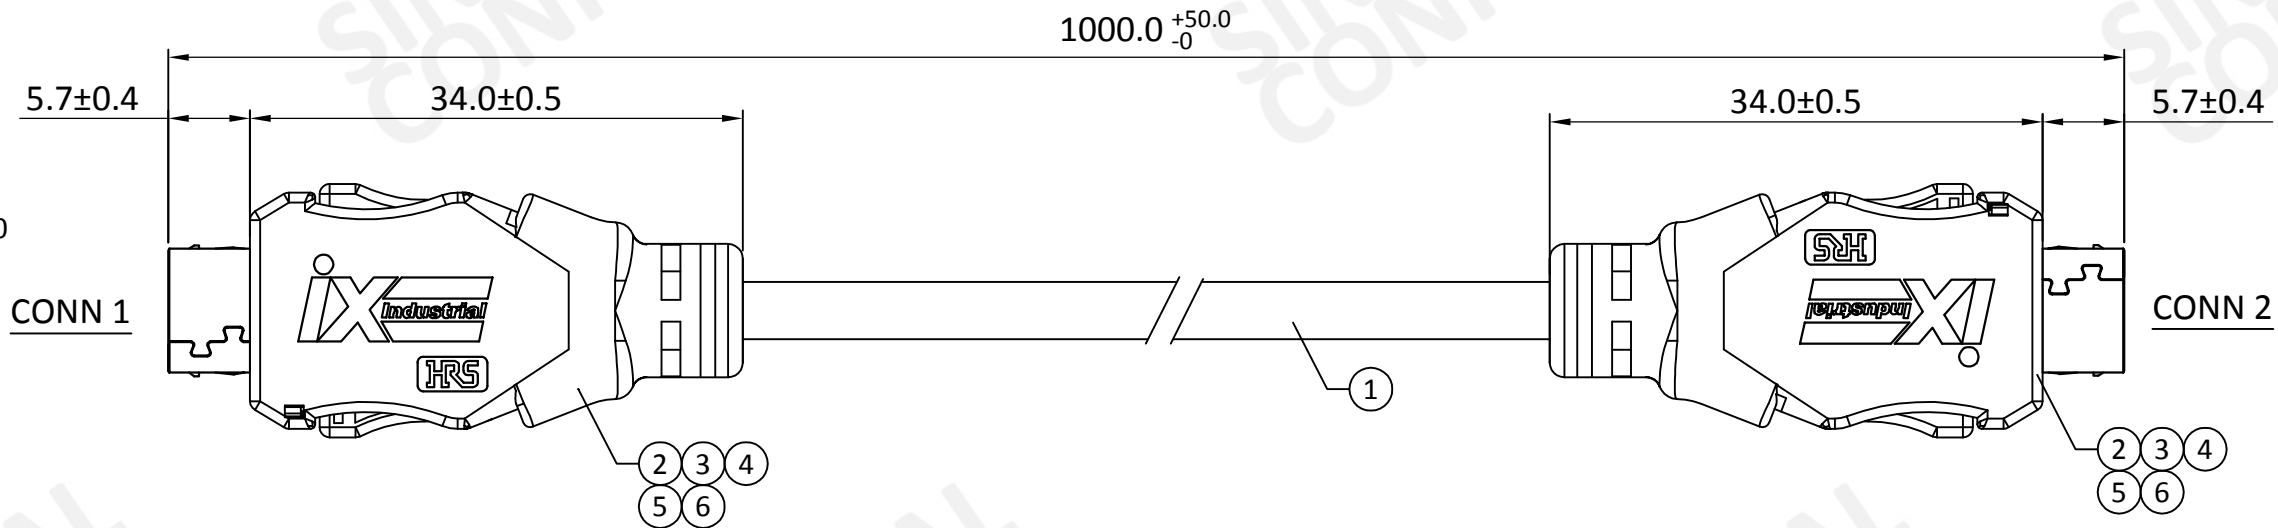


1	2	3	4	5	6	7	8
MOLD TYPE	MOLD NO.	ITEM	REV.	ECN NO.	DATE	BY	DESCRIPTION
CONN1 OVERMOLD	SRO0847	5,6	01		Sep/03/2020	Aine Li	RELEASED
CONN1 OVERMOLD	SRO0848	4					

1	2	3	4	5	6	7	8
MOLD TYPE	MOLD NO.	ITEM	REV.	ECN NO.	DATE	BY	DESCRIPTION
CONN1 OVERMOLD	SRO0847	5,6	01		Sep/03/2020	Aine Li	RELEASED
CONN1 OVERMOLD	SRO0848	4					



AWG	CONN 1		COLOR	CONN 2
26	1	○ ○ ○ ○	BLUE	1
	2	○ ○ ○ ○	WHITE	2
	4	○ ○ ○ ○	ORANGE	4
	5	○ ○ ○ ○	WHITE	5
	6	○ ○ ○ ○	WHITE	6
	7	○ ○ ○ ○	GREEN	7
	9	○ ○ ○ ○	WHITE	9
	10	○ ○ ○ ○	BROWN	10
	SHELL		SHIELD	SHELL

ITEM	QTY	DESCRIPTION
6.	A/R	PLASTIC MASTERBATCH, BLACK, FOR TPU (A88270010001SD)
5.	A/R	TPU, SHORE A 78, NATURAL, POLYETHER, UL94V-0, HF (A51100057001SD)
4.	A/R	TPU, 94A, BLACK, UL94V-0 (A51100051001SD)
3.	2	COPPER FOIL, (W)5*(L)30mm (A4060020200SD)
2.	2	CONN., 10P, BLACK, HRS: IX40G-A-10S-CV(7.0) (A20151893001S)
1.	A/R	CABLE, ULCM, #26*4P+AM+B, BLACK, OD=6.0, CAT 6A (JPCW2421)

- NOTES:
- TESTING SPEC.:
COND. RESISTANCE: 3Ω MAX.
INSUL. RESISTANCE: 10MΩ MIN.
TESTING VOLTAGE: 200V DC
 - FOLLOW IPC620 CLASS II STANDARD TO ASSEMBLY AND INSPECTION.
 - RoHS COMPLIANCE.

THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION AND IS THE PROPERTY OF SINBON ELECTRONICS CO., LTD. IT MAY NOT BE USED OR ITS CONTENTS COPIED OR DISCLOSED TO A THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT AND IS TO BE RETURNED PROMPTLY UPON REQUEST BY SINBON ELECTRONICS CO., LTD.

CUSTOMER : DigiKey		REV. : N/A		 SINBON Electronics Co., Ltd. DESCRIPTION : IX(M) to IX(M), Cat6A, 1M	
CUSTOMER P/N : N/A		DRA. : Aine Li CHK. : Kevin Qiu APR. : Kevin Qiu			
UNLESS OTHERWISE SPECIFIED TOLERANCE :		PART NUMBER : IX40AM-IX40AM-CAT6A10		REV. : 01	
1 ~ 10 : ±1	11 ~ 30 : ±2	31 ~ 50 : ±3	51 ~ 200 : ±5	201 ~ 400 : ±7	> 401 : ±10
ANGLES : ±1°		SIZE : A3	UNIT : mm	SCALE : NONE	SHEET : 1 of 1