

NOTES:
 1. LABEL ON THE CABLE / FOR CABLE IXX PRINTING ON THE CABLE
 2. 2 x ID CARRIER IF IN MATRIX IS "H" OR FOR CABLE IXX & P82.

CONTACTS POSITION FRONT VIEW:

	3 CONTACTS		4 CONTACTS		5 CONTACTS	
M8 - FEMALE						
M12 - MALE						
CONNECTIONS	PIN	WIRE	PIN	WIRE	PIN	WIRE
	1	BROWN	1	BROWN	1	BROWN
	3	BLUE	2	WHITE	2	WHITE
	4	BLACK	3	BLUE	3	BLUE
			4	BLACK	4	BLACK
				5	GREY	


CODING M8 ACCORDING TO IEC 61076-2-104
 CODING M12 ACCORDING TO IEC IEC 61076-2-101

NOTES :
 ELECTRICAL DATA :
 RATED VOLTAGE: 3 contacts 60V AC/DC
 4 & 5 contacts 30V AC/DC
 CURRENT RATING: 3, 4 & 5 contacts 3A
 INSULATION RESISTANCE : 10⁹Ω MIN.
 MATING CYCLES : MIN. 100
 ENVIRONMENTAL :
 PROTECTION CLASS : IP67 IN MATED
 AND LOCKED POSITION
 OPERATING TEMPERATURE : -25°C TO +80°C

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
11	X	ID CARRIER (SEE MATRIX)	PVC	TRANSPARENT
10	1	LABEL (SEE NOTE 1)	VINYL	YELLOW
9	1	GASKET	FKM	RED
8	3/4/5	CONTACT MA	COPPER	GOLD OVER NICKEL PLATED
7	3/4/5	CONTACT FE		
6	1	COUPLING NUT M12 MA	BRASS	Ni-PLATED /TEFLON COAT
5	1	COUPLING NUT M8 FE		
4	1	INSERT MA XP BK	PUR	BLACK
3	1	INSERT FE XP BK	PUR	BLACK
2	-	MOULDING MATERIAL	TPU	BLACK
1	-	CABLE (SEE MATRIX)	-	-

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	SCALE		molex					
	mm	2:1							
	GENERAL TOLERANCES (UNLESS SPECIFIED)								
DIVISIONAL SYMBOLS	ANGULAR TOL	± 1.0°		EC NO: 699224 DRWN: MDHARMANTI 2022/03/11 CHK'D: RSILLER 2022/03/18 APPR: RSILLER 2022/03/18 INITIAL REVISION: DRWN: MDHARMANTI 2022/03/11 APPR: RSILLER 2022/03/18					
	4 PLACES	±							
	3 PLACES	±							
	2 PLACES	± 0.05							
	1 PLACE	± 0.3							
0 PLACES	± 0.5		DOCUMENT NUMBER 1200878440						
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	DOC TYPE	DOC PART	REVISION
			A3-SIZE	120087	SEE MATRIX (SH 2)	GENERAL MARKET	PSD	000	A

PART NO MATRIX

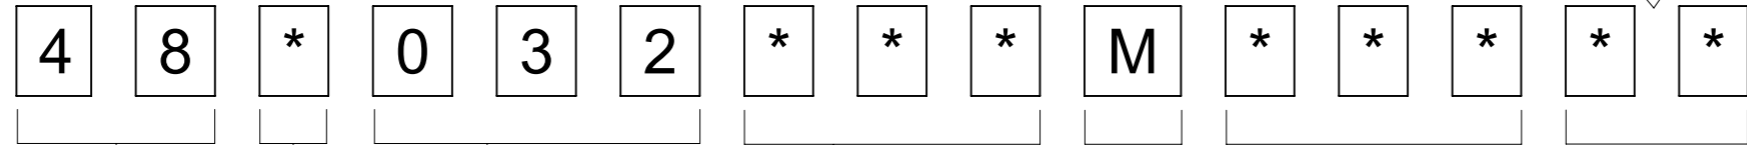

48 = M8x1/M12x1 DOUBLE ENDED


POLES:
3 = 3 POLES
4 = 4 POLES
5 = 5 POLES

CABLE TYPE SEE TABLE

UNIT:
M = METER

LENGTH:
EXAMPLE:
010 = 1 m
050 = 5 m
100 = 10 m

OPTIONS
H = 2 PCS. OF I/D CARRIER
MOLDING/OVERMOULD:
BLANK = BLACK
A = GREY
G = BLACK
Y = YELLOW
COUPLING NUT:
BLANK=KNU/HEX
7=TEFLON



CABLE LIST

CABLE TYPE	NO. OF WIRES	CROSS SECTION	CABLE JACKET	UL	CSA	STATIC: TEMP. / BENDING RADIUS	DYNAMIC: TEMP. / BENDING RADIUS	DRAG CHAIN	SHIELD
E02	3 / 4 / 5 / 8	0.25mm ²	PVC BLACK	UL 2464/1729	C22.2 I/II A/B 80°C/300V	-30°C to +80°C, 10xO.D.	-10°C to +80°C, 15xO.D.	-	-
H09	3 / 4 / 5	0.34mm ²	PUR BLACK LS0H	UL 21198/10493	C22.2 I/II A/B 80°C/300V	-40°C to +80°C, 5xO.D.	-25°C to +80°C, 10xO.D.	2 000 000 cycles at 20°C, Temp. range +5°C to +60°C	-
P02	3 / 4 / 5 / 8	0.25mm ²	PUR / PVC BLACK	-	-	-30°C to +80°C, 7xO.D.	-5°C to +80°C, 15xO.D.	-	-
P82	3 / 4 / 5	0.34mm ²	PUR IRR ORANGE	-	-	-50°C to +105°C, >5xO.D.	-40°C to +105°C, >7.5xO.D.	-	-
I02	3 / 4 / 8	0.25mm ²	PVC CEI GREY	-	-	-30°C to +70°C	-5°C to +70°C	-	-
B41	3	0.25mm ²	TPU BLACK	UL STYLE 21215	CSA RATING 80°C 600V	-40°C to +90°C, 5xO.D.	-25°C to +80°C, >7.5xO.D.	-	-

PART LIST

MOLEX PN	ENGINEERING NO.	LENGTH (mm)
1200878439	483032E02M006	600
1200878440	483032E02M010	1000
1200878641	483032E02M015	1500
1200878581	483032E02M030	3000
1200878441	483032E02M050	5000
1200878442	483032E02M100	10000
1200878443	483032E02M150	15000
1200878489	484032E02M003	300
1200878252	484032E02M050	5000
1200878490	484032E02M006	600
1200878491	484032E02M010	1000
1200878253	484032E02M100	10000
1200878444	483032I02M010	1000
1200878831	483032I02M030Y	3000
1200878445	483032I02M050	5000
1200878832	483032I02M050Y	5000
1200878833	483032I02M100Y	10000

MOLEX PN	ENGINEERING NO.	LENGTH (mm)
1200878446	483032P02M006	600
1200878447	483032P02M010	1000
1200878919	483032P02M015	1500
1200878448	483032P02M020	2000
1200878449	483032P02M030	3000
1200878450	483032P02M050	5000
1200878492	484032P02M020	2000
1200878062	483032P82M0067	600
1200879048	484032B41M050	5000
1200879051	484032B41M100	10000
1200878631	484032H09M030	3000

TABLE OF LENGTH TOLERANCES (mm)

OVER	UP TO AND INCLUDING	TOLERANCE (+)
0	305	+19
305	915	+45
915	1830	+56
1830	3660	+89
3660	7320	+165
7320	14640	+317
14640	30500	+610
30500	>	+2% OF LENGTH

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

FUNCTIONAL SYMBOLS: $\sqrt{A} = 0$, $\sqrt{E} = 0$, $\sqrt{V} = 0$

DIMENSION UNITS: mm

SCALE: 1:1

GENERAL TOLERANCES (UNLESS SPECIFIED):

ANGULAR TOL: $\pm 1.0^\circ$

4 PLACES: \pm

3 PLACES: \pm

2 PLACES: ± 0.05

1 PLACE: ± 0.3

0 PLACES: ± 0.5

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

THIRD ANGLE PROJECTION

DRAWING: A3-SIZE

SERIES: 120087

MATERIAL NUMBER: SEE MATRIX (SH 2)

CUSTOMER: GENERAL MARKET

SHEET NUMBER: 2 OF 2

EC NO: 699224

DRWN: MDHARMANTI 2022/03/11

CHK'D: RSILLER 2022/03/18

APPR: RSILLER 2022/03/18

INITIAL REVISION:

DRWN: MDHARMANTI 2022/03/11

APPR: RSILLER 2022/03/18

DOCUMENT NUMBER: 1200878440

DOC TYPE: PSD

DOC PART: 000

REVISION: A

PRODUCT CUSTOMER DRAWING

moLEX

CSE M8 FE AC STR PUR/PVC M12 MA AC RA XP DE