

ITEM	PART#	DESCRIPTION	QTY	UOM
A	334812201	MX150 ASSY 1.5 BLD 1X2 BLK A/2	1	PC
C	330001001	MX150 BLD TERM TIN 14AWG D WIND	2	PC
D	884260070	PAPER PRINTED PAPER WHITE (S100X150YAJ)	1	PC

FROM	TO	CABLE PART#	DESCRIPTION	COLOR
A1	--	100027101	14AWG DISC PVC BK OD 2.4 TXL BALAJI	BLACK
A2	--	100027101	14AWG DISC PVC BK OD 2.4 TXL BALAJI	BLACK

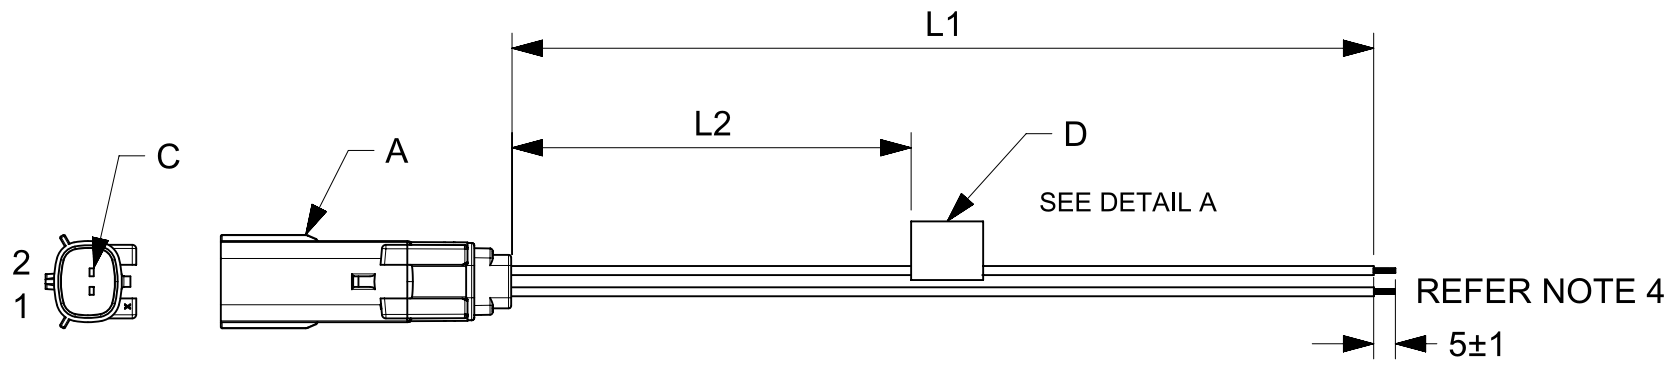


TABLE			
PART NUMBER	L1	L2	TITLE
2162831021	150±8	63 REF	MX150 P-S SR 2ckt 150mm Sn sealed cable
2162831022	300±10	138 REF	MX150 P-S SR 2ckt 300mm Sn sealed cable
2162831023	600±10	288 REF	MX150 P-S SR 2ckt 600mm Sn sealed cable

NOTES

1. Connector view shown is from mating side.
2. Label text must be 2mm max. in height with Arial font.
3. Label must be wrapped in flag type on a single cable.
4. The free ends to be stripped twisted and tinned to the length of 5±1. the tinning dia must be 2.2mm max
5. Sealing should pass the IP67 rating as defined by product spec.

MOLEX P/N
MOLEX
BATCH WK/YR
DETAIL A

FUNCTIONAL SYMBOLS FA = 0 FE = 0 FP = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		molex		
	DIMENSION UNITS	SCALE	EC NO: 717106				
	mm	NTS	DRWN: SAIKIG 2022/05/23				
	GENERAL TOLERANCES (UNLESS SPECIFIED)		CHK'D: SKUMAR07 2022/09/14				
ANGULAR TOL ± °		APPR: SKUMAR07 2022/09/14		PRODUCT CUSTOMER DRAWING			
4 PLACES ±		INITIAL REVISION:		DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
3 PLACES ±		DRWN: NNANKOLA 2020/06/29		2162831021	PSD	000	B
2 PLACES ±		APPR: SD 2020/08/31		MATERIAL NUMBER	CUSTOMER		SHEET NUMBER
1 PLACE ±		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE	GENERAL MARKET		1 OF 1
0 PLACES ±		THIRD ANGLE PROJECTION	DRAWING	SERIES			
			A4-SIZE	216283			