


Ŧ	_ D	п	m	D	0

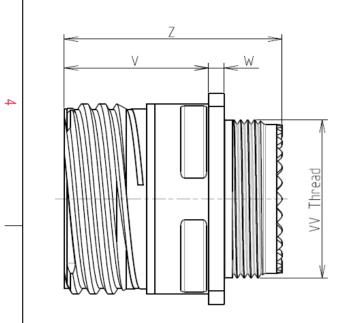

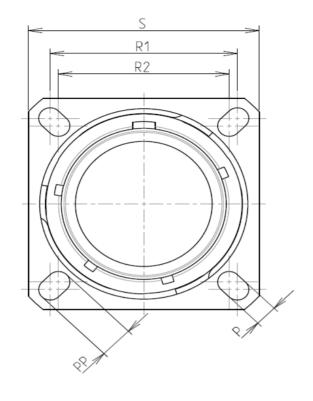



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 17

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	65°C to +175°C			
-Salt Spray	: 500 hours			

: 28.21 g ± 10%

8D 0

G

17

W

06

Ρ

F

В

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.93±0.2			
R1	26.97			
R2	24.61			
S	33.3±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M25x1-6g			


ORIENTATION : B


D

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 17-06



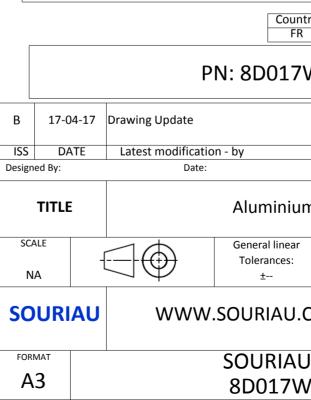

С

	σ		A				
					4		
					3		
	AMPLE						
whic er of t	non-conformit ch does not co he Parties or t on, technical n	mply with by a third part otice.)					
Intry R	Jurisd	liction & Cont Not Listed	rol List		2		
7W	W06PB						
		CUSTOME	R DRAWING	MOD N°			
um	n Receptacle 8D series						
ar		NPRDS / PROJECT 859					
	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
	U DRG N° SHEET						
WC)6PB-C		٨	1/2	J		
	В	1	A				

