


**NOTES:**

1. NOMINAL VOLTAGE IS 1.5V.
2. MAXIMUM THICKNESS OF BATTERY IS 0.028" (0.7MM).
3. MAXIMUM WEIGHT IS 1.0g.
4. ANODE AND CATHODE TERMINALS ARE MADE OF CONDUCTIVE CARBON INK ON TOP SURFACE ONLY. INK WILL BE WITHIN THE 2 HATCH AREAS SHOWN, BUT FULL COVERAGE TO THE EDGES ARE NOT TO BE EXPECTED.
5. ALL MATERIALS ARE RoHS COMPLIANT.

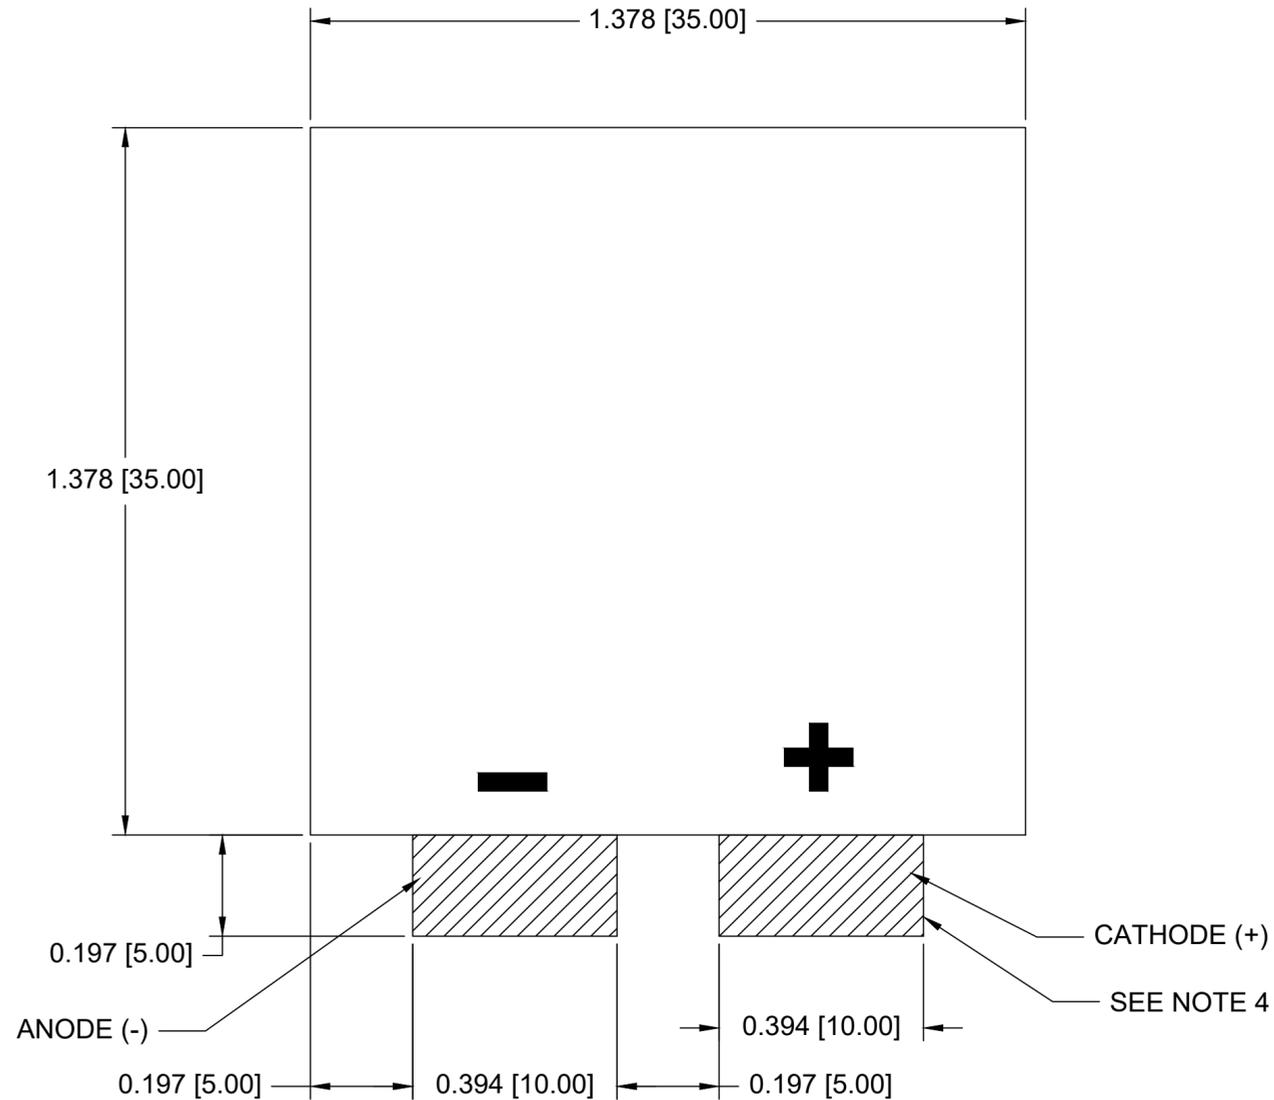

**TOP SURFACE**

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												
	DIMENSION UNITS		SCALE		CURRENT REV DESC: PRODUCTION RELEASE								
$F_A=0$	INCH/MM		4:1		<b>molex</b> BATTERY 1.5V								
$F_C=0$	GENERAL TOLERANCES (UNLESS SPECIFIED)												
$F_P=0$			mm	INCH	EC NO: 648953								
DIVISIONAL SYMBOLS	4 PLACES	±----	±----	DRWN: MJMALONE 2020/10/28									
	3 PLACES	±----	±0.02	CHK'D: JSMITH11 2020/11/12									
	2 PLACES	±0.5	±----	APPR: JSMITH11 2020/11/12									
	1 PLACE	±----	±----	INITIAL REVISION:						DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
	0 PLACES	±----	±----	DRWN: MJMALONE 2020/10/28						133310002	PSD	000	A
ANGULAR TOL ± ---- °				THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						C-SIZE	13331	133310002	GENERAL MARKET	1 OF 1			

DOCUMENT STATUS	P1	RELEASE DATE	2020/11/12	20:23:05
-----------------	----	--------------	------------	----------