


Chip Monolithic Ceramic Capacitor

Electrical Characteristics Data

0603 X5R 0.47uF 16V (0603X474K160CT)

1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0603 (1608)	1.60+0.15/-0.10	0.80+0.15/-0.10	0.80+0.15/-0.10


2. Cap, DF, IR @ 25°C

(Cap, DF @ 1KHz, 1Vrms ; IR @ 16V, 120sec)

Item	Spec
Cap [uF]	0.47(±10%)
DF	≤ 3.5%
IR [M-ohm]	≥ 212.77


3. Impedance/ESR-Frequency

(Equipment: 4294A)

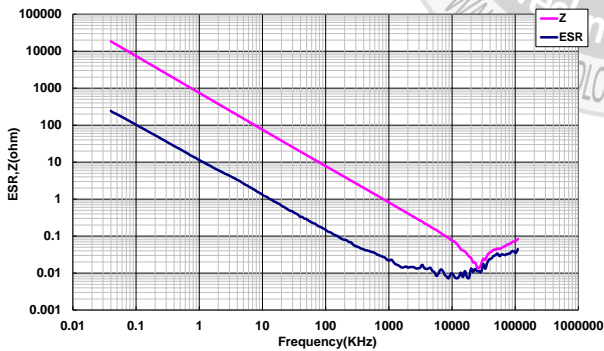


4. Capacitance – Temperature Characteristics

(Equipment: 4284A)

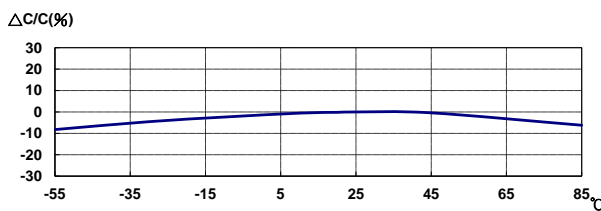

5. Temperature Rise – Ripple Current


(Equipment: 11810)

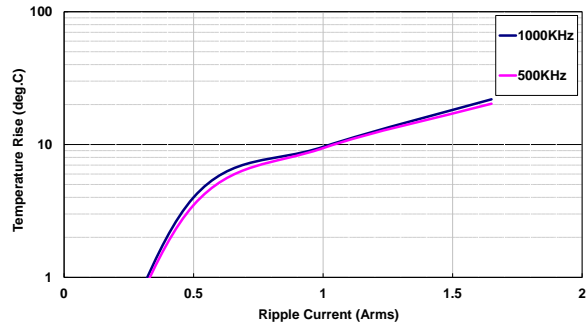

6. Capacitance – DC Voltage Characteristics

(Equipment: 4980A; DC charge 60±5sec)

8V : -16.99% ; 16V : -49.34%

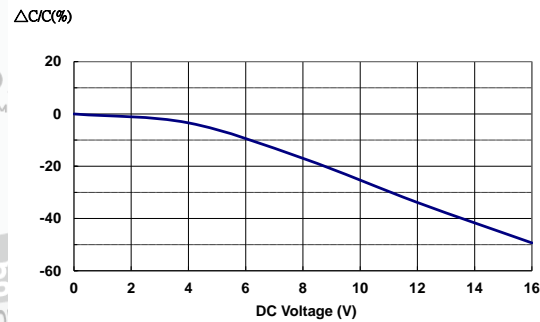

7. Capacitance – AC Voltage Characteristics

(Equipment: 4284A)

