




.XXX ±0.05

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.

| \land \Box | |
|--------------------|---|
| $X \mid \Box \mid$ | 0 |
| | |



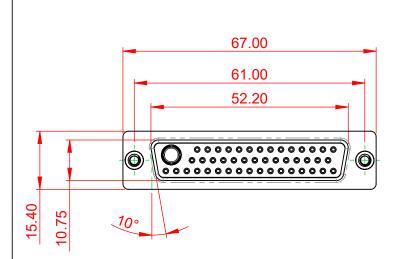



\exists

NOTES:


MATERIAL:

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, Sn or Ni PLATED CONTACT: COPPER ALLOY SEE ORDERING GUIDE FOR PLATING

OPERATING TEMPERATURE: -55°C ~ 125°C


SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: 10mQ MAX. INSULATOR RESISTANCE: 5000MΩ min. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms

| | | SW REFERENCE NO.: 628 COMBO ASSEMBLY | | | |
|--|--------------------------------------|---|-------------------------|------------------|-------|
| | - | | DRAWN: C.B | DATE: JAN. 01/20 | 19 |
| | | | CHECKED: | DATE: | |
| | EDAC INC | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND | SCALE: (IN C.A.D. 1:1) | SHEET 1 OF | 4 |
| | YOUR CONNECTION TO QUALITY & SERVICE | SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | DRAWING NUMBER: 628-47W | 1224-2N5 | ISSUE |
| | | | PART NUMBER: 628-47W | 1224-2N5 | 1 |






THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

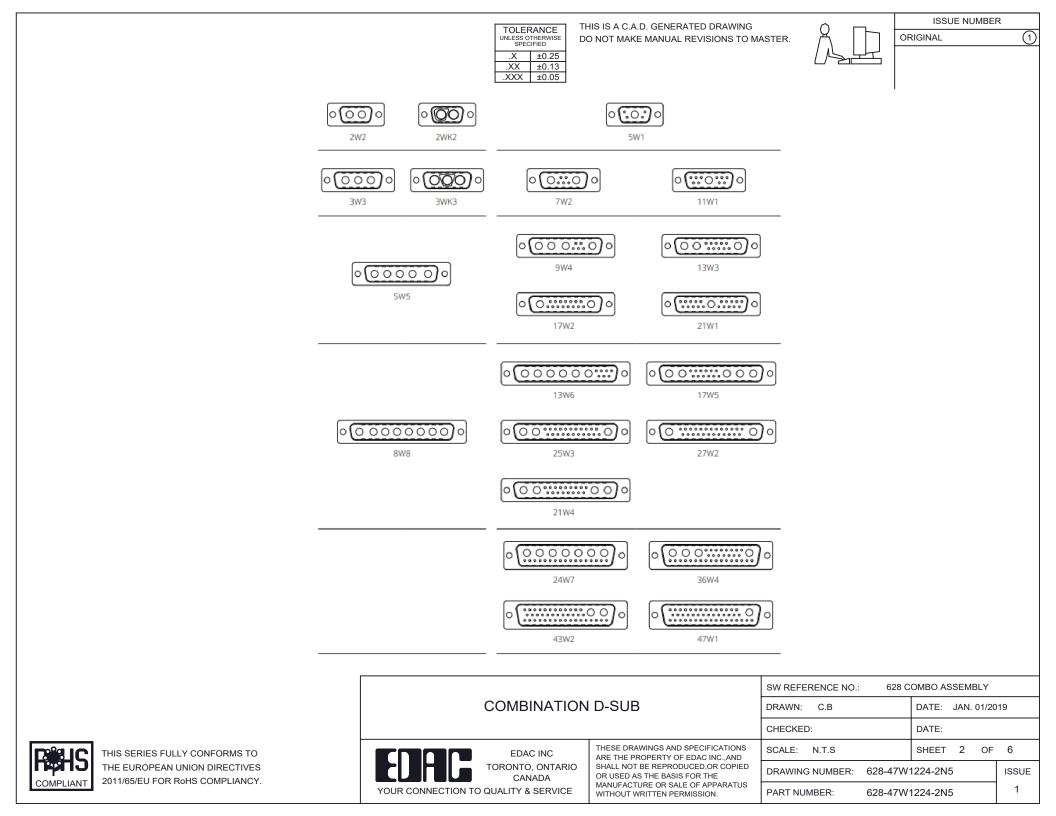

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER. .X ±0.25 .XX ±0.13 .XXX ±0.05





3W3 / 3WK3

5W1 Male/Female

7W2 Male/Female






(1)

21W4 Male/Female

PART NUMBER:






628-47W1224-2N5


| | | § ⁹ + + 2 <i>1</i> 7 | 7.13 | 2.77 | |
|--|---------------------------------|--|--|---|-------|
| | | 11W1 Male/Female | 27W2 Male/Femal | e | |
| 47.06 23.63 144 14.48 90 90 90 90 90 90 90 90 90 90 | 8W8 Female | 33.30 16.86 9.70 8.31 9.70 | | 63.50 31.75 16.24 ++++++++ +++++++++++++++++++++++++++ | |
| CURRENT RATING 10A / 2.2 20A / 3.3 30A / 3.7 40A / 4.2 | A36 A | 17W2 Male/Female | 21W1 Male/Femal | e 47.05 23.65 25.55 | æ |
| | | | W1 Male/Female 27W2 Male/Female Image: Ima | | |
| | COMBIN | IATION D-SUB | DRAWN: C.B | DATE: JAN. 01/20 |)19 |
| | | | CHECKED: | DATE: | |
| SERIES FULLY CONFORMS TO | EDAC II | | SCALE: N.T.S | SHEET 3 OF | 4 |
| EUROPEAN UNION DIRECTIVES /65/EU FOR R₀HS COMPLIANCY. | | OR USED AS THE BASIS FOR THE | DRAWING NUMBER: 628-47W | 1224-2N5 | ISSUE |
| | YOUR CONNECTION TO QUALITY & SE | ERVICE MANUFACTURE OR SALE OF APPARATUS | PART NUMBER: 628-47W | 1224-2N5 | 1 |

5W5 Male


5W5 Female



8W8 Male



5.30



WITHOUT WRITTEN PERMISSION.

THIS SE THE EU 2011/65/EU FOR RoHS COMPLIANCY. COMPLIANT

 TOLERANCE UNLESS OTHERWISE
 THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.


 .X
 ±0.25










25W3 Male












13W3 Male



36W4 Male







13W6 Male



43W2 Male





.XX ±0.13 .XXX ±0.05

9W4 Female

13W3 Female



43W2 Female


47W1 Female

36W4 Female



17W5 Male

COMPLIANT






2.77







| | | SW REFERENCE NO.: 628 C | RENCE NO.: 628 COMBO ASSEMBLY | | |
|--|--------------------------------------|--|-----------------------------------|------------|-------|
| , | COMBINATION | DRAWN: C.B | DATE: JAN. 01/201 | J19 | |
| | | | CHECKED: | DATE: | |
| THIS SERIES FULLY CONFORMS TO | EDAC INC | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND | SCALE: N.T.S | SHEET 4 OF | 4 |
| THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY. | YOUR CONNECTION TO QUALITY & SERVICE | SHALL NOT BE REPRODUCED OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | DRAWING NUMBER: 628-47W1224-2N5 | | ISSUE |
| | | | PART NUMBER: 628-47W ² | /1224-2N5 | 1 |