


THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER




(1)



NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 COPPER ALLOY, 30µ GOLD PLATED

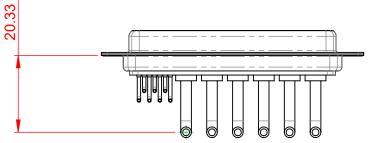



STEEL, NICKEL PLATED


-55°C ~ 125°C **OPERATING TEMPERATURE:**

POWER/CO-AX CONTACT RATING: 20A (CURRENT)

(IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX.

INSULATOR RESISTANCE: DIELECTRIC WITHSTANDING VOLTAGE: 5000MΩ min.

1000V AC rms



	COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY		
COMBIN			DATE: JAN. 01/20	19	
			DATE:		
EDAC INC	IC THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC. AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2	
	A OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 630-13W6650-2N1		ISSUE	
YOUR CONNECTION TO QUALITY & SE	RVICE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER: 630-13W	6650-2N1	1	



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

