


TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	
ORIGINAL	

(1)

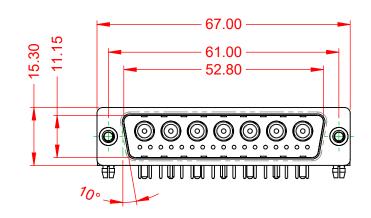




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

DIELECTRIC

WITHSTANDING VOLTAGE:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED




THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

COMPLIANT

OPERATING TEMPERATURE: $-55^{\circ}C \sim 125^{\circ}C$ POWER/CO-AX CONTACT RATING:10A (CURRENT)(IF PRESENT)SIGNAL CONTACT CURRENT RATING:5A PER CONTACTSIGNAL CONTACT RESISTANCE:10m Ω MAX.INSULATOR RESISTANCE:5000M Ω min.

.X ±0.25 .XX ±0.13 .XXX ±0.05



		SW REFERENCE NO.: 629 COMBO ASSEMBLY					
			COMBINATION D-SUB		DRAWN: C.B	DATE: JAN. 01/201	19
			CHECKED:	DATE:			
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2		
	TORONTO, ONTARIO CANADA	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 629-24W7250-1TB		ISSUE		
	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 629-24W	7250-1TB	1		

1000V AC rms

