

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0444281002](#)
Status: **Active**
Overview: [Micro-Fit Connector System](#)
Description: Micro-Fit BMI Header, Surface Mount Compatible, Dual Row, Right-Angle, with Snap-in Plastic Peg PCB Lock, 10 Circuits, 0.38µm Gold (Au) Selective Plating

Documents:

Drawing (PDF)	Test Summary 444280001-TS-000 (PDF)
3D Model	Datasheet (PDF)
3D Model (PDF)	Symbol Footprint Data SYM-44428-1001-001 (PDF)
Product Specification PS-44300-001-001 (PDF)	Symbol Footprint Data SYM-44428-10013-001 (PDF)
Packaging Specification PK-44428-001-001 (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification


CSA	LR19980
UL	E29179

General

Product Family	PCB Headers
Series	44428
Application	Board-to-Board, Power, Wire-to-Board
Comments	High Temperature Square Pin Solder Type Polarized to Mating Part
Overview	Micro-Fit Connector System
Product Name	Micro-Fit BMI
UPC	800756379760

Physical

Breakaway	No
Circuits (Loaded)	10
Circuits (maximum)	10
Color - Resin	Black
Durability (mating cycles max)	30
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	2.384/g
Number of Rows	2
Orientation	Right Angle
PC Tail Length	3.50mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
Packaging Type	Tray
Pitch - Mating Interface	3.00mm
Plating min - Mating	0.381µm
Plating min - Termination	2.540µm
Polarized to PCB	Yes
Shrouded	Fully
Stackable	No

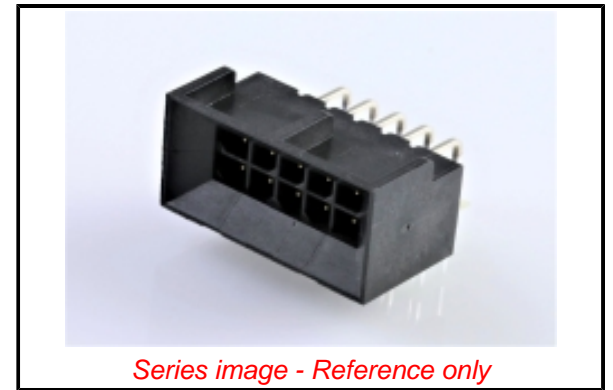

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Contained Per -
D(2021)4569-DC (8
July 2021)
Dibutylbis(pentane-2,4-
dionato-O,O')tin
2-ethylhexyl 10-
ethyl-4,4-dioctyl-7-
oxo-8-oxa-3,
Phenol, 2-(2H-
benzotriazol-2-yl)-4,6-
bis(1,1-dim
Ammonium-
pentadecafluorooctanoate
C.I. Direct Black 38
Dibutyltin-dichloride
1,2-diethoxyethane
1,2-
Benzenedicarboxylic
acid, bis(3-
methylbutyl)
Disodium 3,3'-[[1,1'-
Biphenyl]-4,4'-
Diylbis(Azo)
Octamethylcyclotetrasiloxane
Decamethylcyclopentasiloxane
Dodecamethylcyclohexasiloxane
Octanoic acid,
2,2,3,3,4,4,5,5,6,6,7,7,8,8,8-
pen
Benzo(ghi)perylene
Dipentyl phthalate
2-(2H-Benzotriazol-2-
yl)-4,6-
ditertpentylphenol
Perfluorohexane-1-
sulphonic acid and its
salts

China RoHS

Surface Mount Compatible (SMC) Yes
Temperature Range - Operating -40° to +105°C
Termination Interface: Style Through Hole

Electrical

Current - Maximum per Contact 8.5A
Voltage - Maximum 600V

Solder Process Data

Duration at Max. Process Temperature (seconds) 005
Lead-free Process Capability WAVE
Max. Cycles at Max. Process Temperature 001
Process Temperature max. C 260

Material Info

Reference - Drawing Numbers

Packaging Specification PK-44428-001-001
Product Specification PS-44300-001-001
Sales Drawing SD-44428-001-001
Symbol/Footprint Data SYM-44428-1001-001, SYM-44428-1001_3-001
Test Summary 444280001-TS-000

Perfluorononan-1-
oic acid
(2,2,3,3,4,4,5,5,6,6,7
Dioctyltin dilaurate,
stannane, dioctyl-,
bis(co
Dodecachloropentacyclo[12.2.1.16,9.02,13.05,10]o
Pyrene
Fluoranthene
Perfluorobutane
sulfonic acid (PFBS)
and its sal
Tris(4-nonylphenyl,
branched and linear)
phosphi
Nonadecafluorodecanoic
acid (PFDA) and its
sodiu
Zirconia
Aluminosilicate
Refractory Ceramic
Fibr
1,2-
Benzenedicarboxylic
acid, dipentyl ester, br
diisohexyl phthalate
1,2-
Benzenedicarboxylic
acid, dihexyl ester,
bra
2-(2H-Benzotriazol-2-
yl)-4-(tert-butyl)-6-
(sec-b
2-(2H-Benzotriazol-2-
yl)-4,6-
ditertpentylphenol
Cadmium
Lead
Lead(II,IV)-oxide
Cadmium-oxide
Diboron-trioxide
Decabromodiphenylether
1,2-bis(2-
methoxyethoxy)ethane
1,2-Dimethoxyethane
bis(2-methoxyethyl)
ether
Tris(2-chloroethyl)
phosphate
Lead chromate
molybdate sulfate red
Lead chromate
Bis(tributyltin) oxide
Alkanes, C10-13,
chloro
Cobalt-dichloride
Cadmium
Dipentyl phthalate
Imidazolidine-2-thione
Phenanthrene
N,N-
Dimethylformamide
4-aminoazobenzene
[Phthalato(2-)]dioxotrilead

Silicic acid (H₂Si₂O₅),
barium salt (1:1),
lead-
Sulfurous Acid, Lead
Salt, Dibasic
Cyanamide, lead(2+)
salt (1:1)
Lead titanium
zirconium oxide
Dioxobis(stearato)trilead
Tetralead-trioxide-
sulphate
Pentalead-tetraoxide-
sulphate
Lead-titanium-trioxide
Lead-dinitrate

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

[44428](#) Series

Mates With

[44133](#) Micro-Fit BMI Panel Mount
Receptacle Housing, [44764](#) Micro-Fit BMI
Receptacle Header, [44769](#) Micro-Fit BMI
Receptacle Header

This document was generated on 08/30/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION