



LAYOUT SHOWN AS EXAMPLE

Keying Shown as example

**CHARACTERISTICS**

- Standard : Based on MIL-DTL-38999 Series III
- Shell Material : Composite
- Shell Plating : Olive drab Cadmium
- Insulator : Thermoplastic
- Contacts : Copper Alloy
- Seals & Grommet : Silicon Elastomer
- Contact Plating : Gold over copper Alloy 0.8µm minimum
- Durability : 500 Mating cycles
- Delivered with Souriau contacts and Accessories
- Temperature Range : -65°C to +175°C
- Salt Spray : 2000 hours
- Mass : 80.4 g ± 10%

| Connector dimension |          |
|---------------------|----------|
| Dim                 | Nominal  |
| ØS                  | 48 Max   |
| Z'                  | 31.5 Max |
| VV THREAD           | M37x1-6g |

SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)

| Country | Jurisdiction & Control List |
|---------|-----------------------------|
| FR      | Not Listed                  |

**PN: 8D525J37SN**

|              |            |                          |                         |
|--------------|------------|--------------------------|-------------------------|
| A            | 07-10-2016 | First Release            |                         |
| ISS          | DATE       | Latest modification - by | MOD N°                  |
| Designed By: |            | Date:                    | <b>CUSTOMER DRAWING</b> |


**TITLE** Composite Plug 8D series

|       |  |                                |                 |
|-------|--|--------------------------------|-----------------|
| SCALE |  | General linear Tolerances: ±-- | NPRDS / PROJECT |
| NA    |  |                                | <b>859</b>      |

**SOURIAU** WWW.SOURIAU.COM

This document is the property of SOURIAU it must not be reproduced or communicated without permission

|           |                                    |  |            |
|-----------|------------------------------------|--|------------|
| FORMAT    | <b>SOURIAU DRG N° 8D525J37SN-C</b> |  | SHEET      |
| <b>A3</b> |                                    |  | <b>1/2</b> |

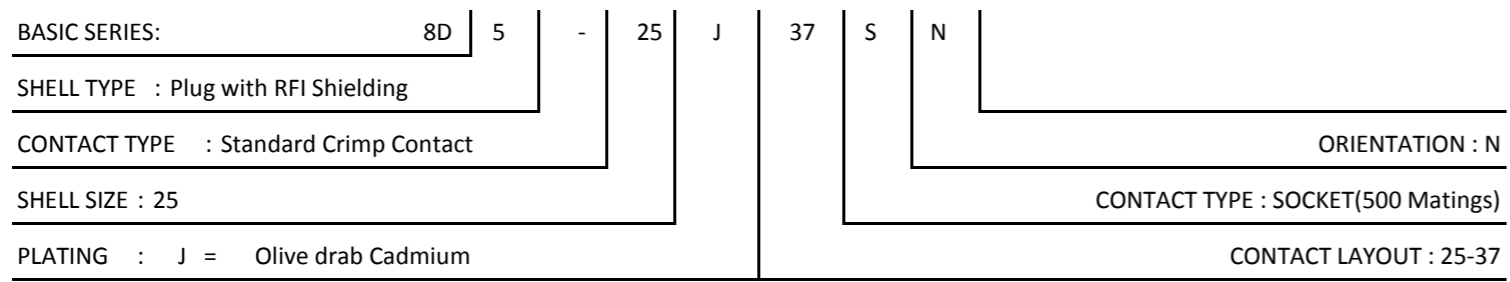

4  
3  
2  
1

**Contact Layout**



| Contacts<br>(Insert arrangement 25-37) |              |              |                     |             |             |
|----------------------------------------|--------------|--------------|---------------------|-------------|-------------|
| Contact position ID                    | Location     |              | Contact position ID | Location    |             |
|                                        | X-axis (mm)  | Y-axis (mm)  |                     | X-axis (mm) | Y-axis (mm) |
| A                                      | +000 (.00)   | +472 (11.99) | W                   | +242 (6.15) | +236 (5.99) |
| B                                      | +185 (4.70)  | +472 (11.99) | X                   | +326 (8.28) | +086 (2.18) |
| C                                      | +333 (8.46)  | +382 (9.70)  | Y                   | +326 (8.28) | -086 (2.18) |
| D                                      | +441 (11.20) | +249 (6.32)  | Z                   | +242 (6.15) | -236 (5.99) |
| E                                      | +500 (12.70) | +086 (2.18)  | a                   | +086 (2.18) | -320 (8.13) |
| F                                      | +500 (12.70) | -086 (2.18)  | b                   | -086 (2.18) | -320 (8.13) |
| G                                      | +441 (11.20) | -249 (6.32)  | c                   | -242 (6.15) | -236 (5.99) |
| H                                      | +333 (8.46)  | +382 (9.70)  | d                   | -326 (8.28) | -086 (2.18) |
| J                                      | +186 (4.72)  | -472 (11.99) | e                   | -326 (8.28) | +086 (2.18) |
| K                                      | +000 (.00)   | -472 (11.99) | f                   | -242 (6.15) | +236 (5.99) |
| L                                      | -186 (4.72)  | -472 (11.99) | g                   | -086 (2.18) | +320 (8.13) |
| M                                      | -333 (8.46)  | -382 (9.70)  | h                   | +000 (.00)  | +172 (4.37) |
| N                                      | -441 (11.20) | -249 (6.32)  | k                   | +154 (3.91) | +086 (2.18) |
| P                                      | -500 (12.70) | -086 (2.18)  | m                   | +154 (3.91) | -086 (2.18) |
| R                                      | -500 (12.70) | +086 (2.18)  | n                   | +000 (.00)  | -172 (4.37) |
| S                                      | -441 (11.20) | +249 (6.32)  | p                   | -154 (3.91) | -086 (2.18) |
| T                                      | -333 (8.46)  | +382 (9.70)  | q                   | -154 (3.91) | +086 (2.18) |
| U                                      | -186 (4.72)  | +472 (11.99) | r                   | +000 (.00)  | +000 (.00)  |
| V                                      | +086 (2.18)  | +320 (8.13)  | ---                 | ---         | ---         |

| Shell size | Arrangement no. | Number of contacts | Size contacts | Service rating | Contact location | Supersedes |
|------------|-----------------|--------------------|---------------|----------------|------------------|------------|
| 25         | 37              | 37                 | 16            | II             | All              | ---        |

SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)

| Country | Jurisdiction & Control List |
|---------|-----------------------------|
| FR      | Not Listed                  |

**PN: 8D525J37SN**

|                |                                    |                            |                                                                                                       |
|----------------|------------------------------------|----------------------------|-------------------------------------------------------------------------------------------------------|
| A              | 07-10-2016                         | First Release              |                                                                                                       |
| ISS            | DATE                               | Latest modification - by   | MOD N°                                                                                                |
| Designed By:   |                                    | Date:                      | <b>CUSTOMER DRAWING</b>                                                                               |
| <b>TITLE</b>   | <b>Composite Plug 8D series</b>    |                            |                                                                                                       |
| SCALE          |                                    | General linear Tolerances: | NPRDS / PROJECT                                                                                       |
| NA             |                                    | ±--                        | <b>859</b>                                                                                            |
| <b>SOURIAU</b> | <b>WWW.SOURIAU.COM</b>             |                            | This document is the property of SOURIAU it must not be reproduced or communicated without permission |
| FORMAT         | <b>SOURIAU DRG N° 8D525J37SN-C</b> |                            | SHEET                                                                                                 |
| <b>A3</b>      |                                    |                            | <b>2/2</b>                                                                                            |

4

3

2

1

4

3

2

1