


# 1N4532

## FEATURES

- 1N4532 AVAILABLE IN JAN, JANTX, AND JANTXV PER MIL-PRF-19500/144
- SWITCHING DIODE
- METALLURGICALLY BONDED
- HERMETICALLY SEALED
- DOUBLE PLUG CONSTRUCTION

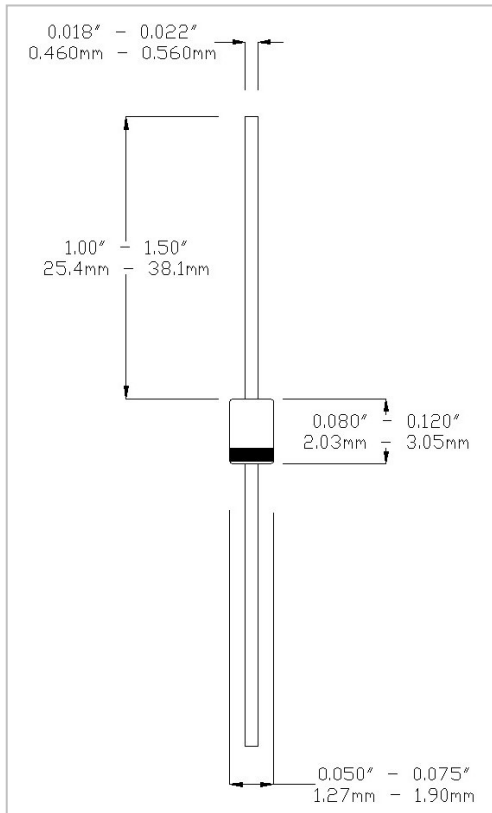

## MAXIMUM RATINGS AT 25 °C

Operating Temperature:	-55°C to +175°C
Storage Temperature:	-55°C to +175°C
Surge Current, Sine, 1uS:	2.0A
Total Power Dissipation:	500mW
Operating Current:	125mA, T <sub>A</sub> = +25°C
Derating Factor:	0.883mA/°C above T <sub>A</sub> = +25°C
D.C. Reverse Voltage (VRWM):	50V

## DC ELECTRICAL CHARACTERISTICS

Ambient (°C)	V <sub>F</sub>			Ambient (°C)	I <sub>R</sub>			Ambient (°C)	V <sub>BR</sub>		
	I <sub>F</sub> mA	Min V	Max V		V (dc)	Min μA	Max μA		I <sub>R</sub> μA	Min V	Max V
25	10	-	1.0	25	50	-	0.1	25	5	75	-
150	10	-	0.7	150	50	-	100	-55	10	75	-

## DESIGN DATA

**Case:** Hermetically sealed glass package per MIL-PRF-19500/144 DO-34 outline

**Lead Material:** Copper clad steel

**Lead Finish:** Tin/Lead

**Thermal Resistance (R<sub>θJL</sub>):** 250°C/W maximum at L=.375"

**Thermal Impedance (Z<sub>θJX</sub>):** 70°C/W maximum

**Marking:** Alpha numeric.

**Polarity:** Cathode end is banded.

## AC ELECTRICAL CHARACTERISTICS AT 25°C

	Symbol	Min	Max
Capacitance @ 0V	pF	-	2.0
T <sub>RR</sub> @ I <sub>F</sub> =I <sub>R</sub> =10mA, I <sub>rec</sub> = 1mA.	nsec	-	4.0
T <sub>FR</sub> @ IF = 100mA	nsec	-	30
V <sub>FR</sub> @ IF = 100mA	V(pk)	-	5



WWW.MICROSEMI.COM

IRELAND - GORT ROAD, ENNIS, CO. CLARE

PHONE: +353 65 6840044

TOLL FREE: +186 62 702434

FAX: +353 65 6822298

U.S.A. DOMESTIC SALES CONTACT

PHONE: (617) 926 0404

TOLL FREE: 1 800 666 2999