


Technical Data Sheet

Rosenberger

Cable assembly
RPC-1.00 Jack – RTK 047-F – RPC-1.85 Plug

L70-385-XXX

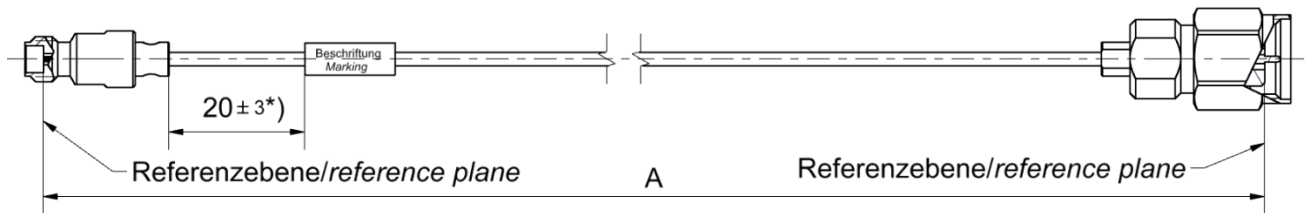

All dimensions are in mm; tolerances: ± 3mm for A ≤ 300 mm; ± 1% for A > 300 mm
*) If length "A" ≤ 90 mm marking is mount centric ± 5mm

Available variants

Type	max. Insertion loss	Marking	Weight (g) / pce
L70-385-XXX	$\leq (0.0020 * \sqrt{f[\text{GHz}]} + 0.00008 * f[\text{GHz}]) \frac{\text{dB}}{\text{mm}}$	ROSENBERGER YYYYY-WW L70-385-XXX sssss	$0.0056 \frac{\text{g}}{\text{mm}} * A[\text{mm}] + 4.70 \text{ g}$

XXX – length in mm = A Maximum possible length = 6000mm
WW – week YYYYY – year sssss – serial no.

Note: Weight:
First constant = Cable weight per mm; Second Constant = Connector left and Connector right weight per pce

Assembly parts

Connector left	RPC-1.00 Jack
Connector right	RPC-1.85 Plug
Cable	RTK 047-F
Armour	none

Electrical data

Impedance	50 Ω
Frequency	DC to 70 GHz
Return loss ¹	≥ 17 dB, DC to 50 GHz ≥ 14 dB, 50 to 70 GHz
Insertion loss ¹	see table available variants

Individual testing and documentation:
Measurement plot with all 4 S – Parameters (S11; S22; S21; S12) is included with the cable assembly and on the backside the care and handling instruction is printed.

Mechanical data

Minimum bend radius static	7.0 mm
Minimum bend radius dynamic	14.0 mm

Environmental data

Temperature range	- 40 °C to +85 °C
RoHS	compliant

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

For the installation of the electrotechnical equipment, particular electrotechnical expertise is required.



Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
Marcel Panicke	25.10.19	Ronny Mark	12.01.23	c00	22-2195	Marion Striegler	11.01.23

Rosenberger Hochfrequenztechnik GmbH & Co. KG
P.O.Box 1260 D-84526 Tittmoning Germany
www.rosenberger.com

Tel. : +49 8684 18-0
Email : info@rosenberger.com

Page
1 / 1