

MODEL:

PDU3XMV6G32

3-Phase Metered Rack-Mount PDU



400/380/360V
3-Phase Input



32A Red IEC 309
3P+N+E Plug



230/220/200V
Single-Phase
Output



42 Outlets



22.2kW
21.1kW
20kW
Load Capacity



Multifunction
Load Meter




0U
Rack-Mount





Toolless
Mounting
Buttons

- A** Multifunction Load Meter
- B** C13 and C19 Outlets
- C** 20A 2-Pole Hydraulic Magnetic Circuit Breakers
- D** C13 and C19 Plug-lock Inserts
- E** Removable Mounting Brackets
- F** Toolless Mounting Buttons with Removable 90° Rotation Brackets
- G** 6 ft. Input Power Cord
- H** 32A Red IEC 309 3P+N+E Plug
- I** Durable Metal Case
- J** RJ45 Configuration Port (For factory use only)





Also Includes: Owner's Manual

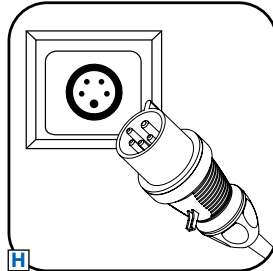

AC Input Connection: Insert 32A Red IEC 309 3P+N+E plug into compatible utility, generator or UPS outlet.

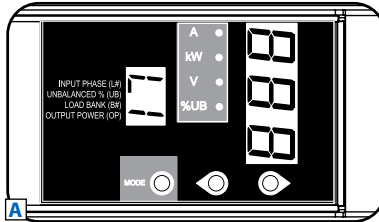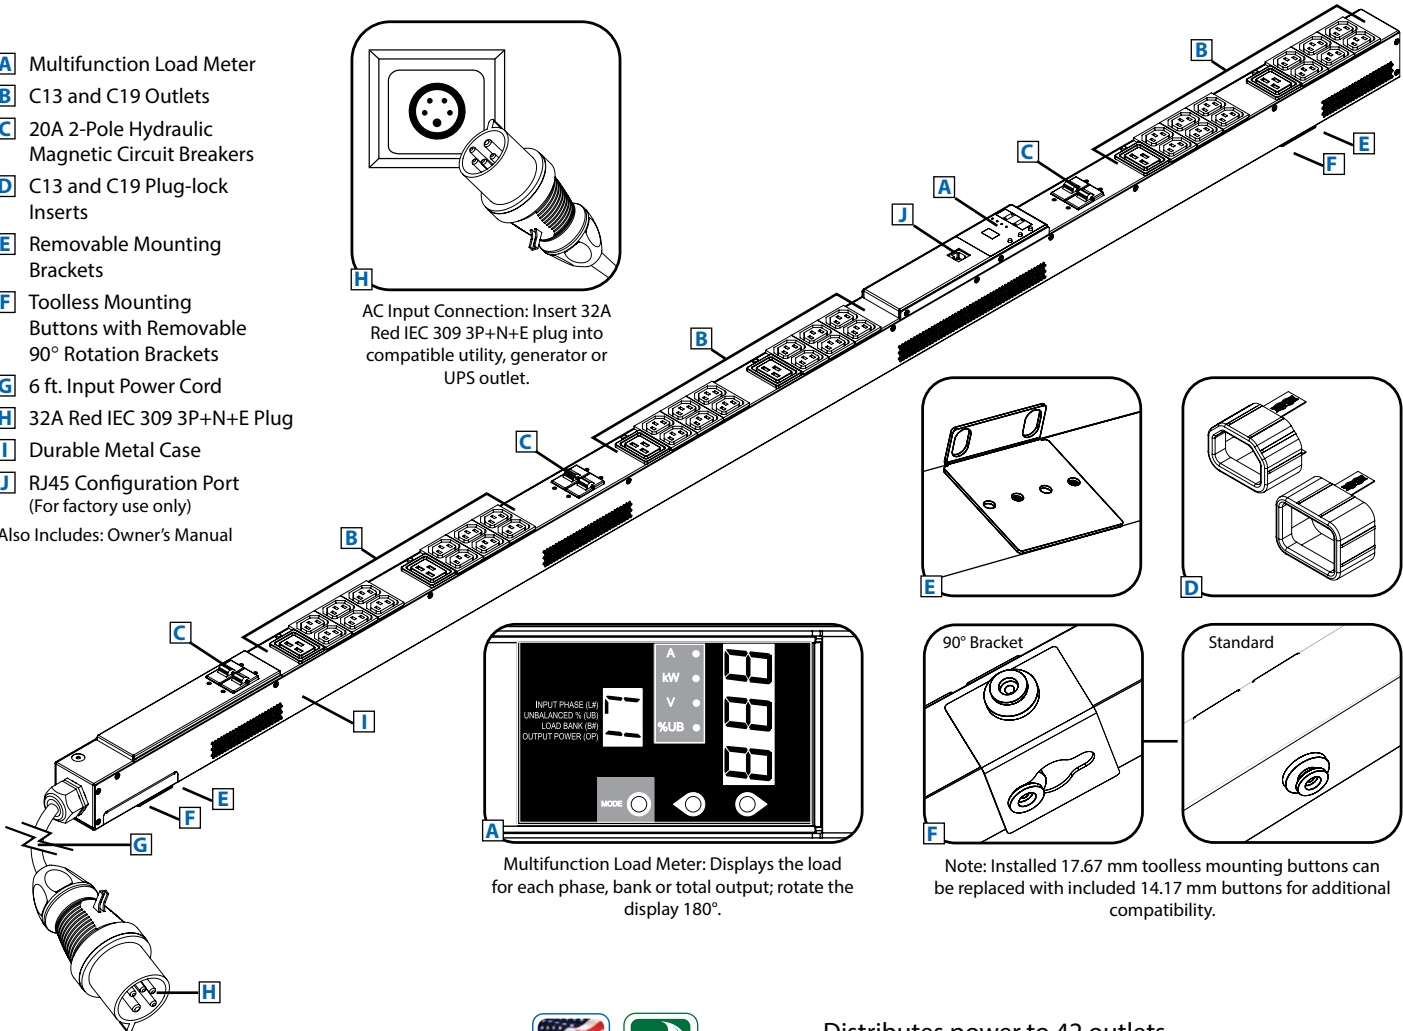

Multifunction Load Meter: Displays the load for each phase, bank or total output; rotate the display 180°.



Note: Installed 17.67 mm toolless mounting buttons can be replaced with included 14.17 mm buttons for additional compatibility.

Specifications

Model	PDU3XMV6G32
Voltage	400/380/360V 3-Phase Input/ 230/220/200V Single-Phase Output
Frequency	50/60Hz
Load Capacity	22.2/21.1/20kW
Input Plug	32A Red IEC 309 3P+N+E
Input Cord Length	6 ft.
Outlets	42 (36 C13 / 6 C19)
Primary Mounting Option	0U (Vertical) Rack-Mount
Unit Weight & Dimensions (H x W x D)	14.29 lb. / 70 x 2.17 x 2.49 in. 6.49 kg / 1778 x 55.1 x 63.2 mm
Standards	See next page for detailed unit measurements. Tested to UL 60950-1, CE (EN60950-1), Class A, NOM, ROHS, TAA Compliant




- Distributes power to 42 outlets (12 C13 and 2 C19 per phase)
- Displays load for output phase in real time
- Perfect for rack-mount server, network and telecom applications

SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS



1111 W. 35th Street
Chicago, IL 60609 USA
773.869.1234
www.tripplite.com

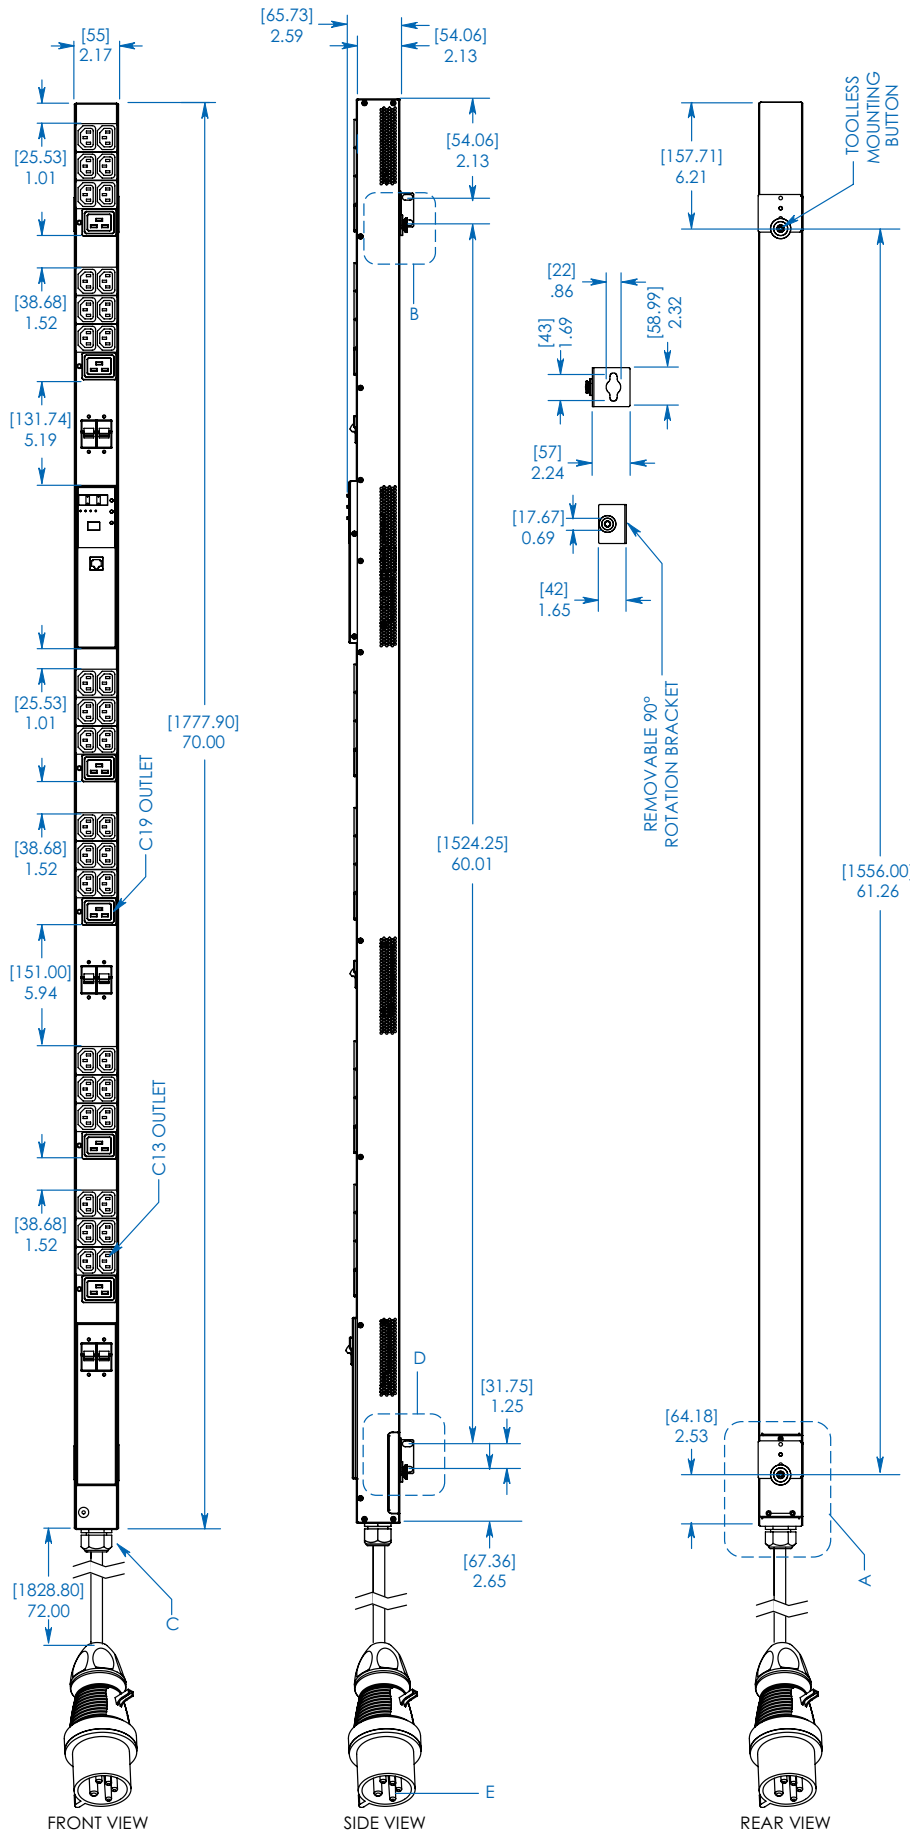

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

MODEL:
PDU3XMV6G32

TRIPP-LITE

1111 W. 35th Street
Chicago, IL 60609 USA

773.869.1234

www.tripplite.com