

ITEM	PART#	DESCRIPTION	QTY	UOM
A,B	334713306	MX150 ASSY 1.5 RCPT 1X3 CPA BLK A/3	2	PC
C	330123001	MX150 RCPT 0.3 TIN 14/16AWG D WIND SLD	6	PC
D	884260070	PAPER PRINTED PAPER WHITE (S100X150YAJ)	1	PC

FROM	TO	CABLE PART#	DESCRIPTION	COLOR
A1	B3	100027101	14AWG DISC PVC BK OD 2.4 TXL BALAJI	BLACK
A2	B2	100027101	14AWG DISC PVC BK OD 2.4 TXL BALAJI	BLACK
A3	B1	100027101	14AWG DISC PVC BK OD 2.4 TXL BALAJI	BLACK

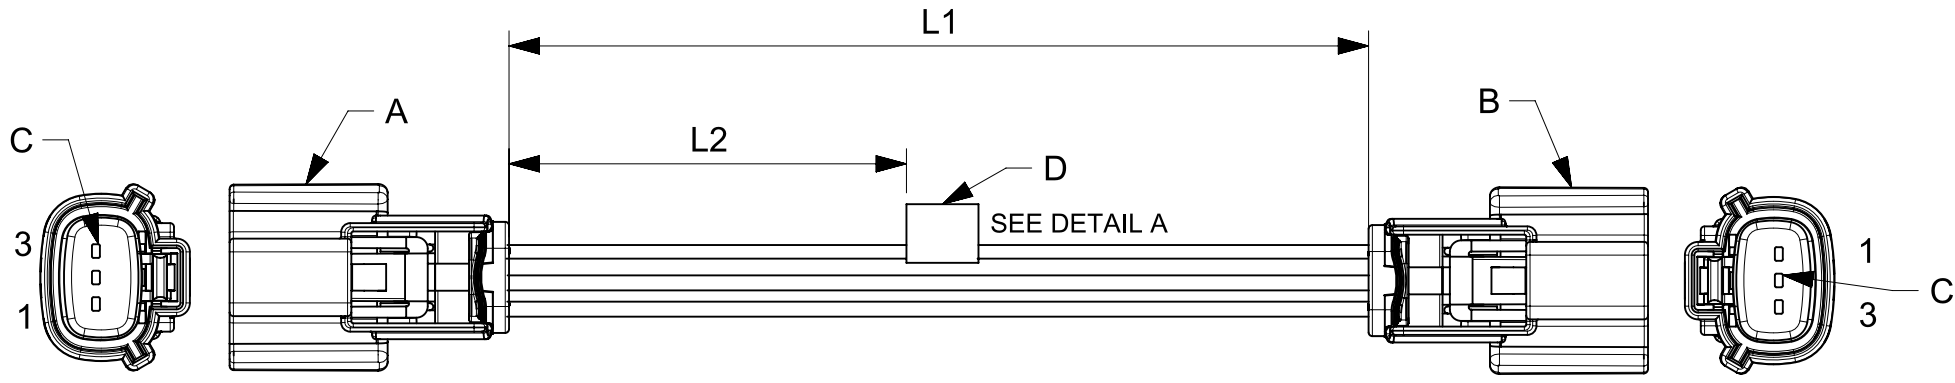


TABLE			
PART NUMBER	L1	L2	TITLE
2162801031	150±8	63 REF	MX150 R-R SR 3ckt 150mm Sn sealed cable
2162801032	300±10	138 REF	MX150 R-R SR 3ckt 300mm Sn sealed cable
2162801033	600±10	288 REF	MX150 R-R SR 3ckt 600mm Sn sealed cable

- NOTES
1. Connector assembly must pass 100% continuity and polarity test.
 2. Sealing must pass the IP67 rating as defined by product specification.
 3. Connector view shown is from mating side.
 4. Label text must be 2mm max. in height with Arial font.
 5. Label must be wrapped in flag type on a single cable.

MOLEX P/N
MOLEX
BATCH WK/YR
DETAIL A

FUNCTIONAL SYMBOLS $\frac{FA}{\Delta} = 0$ $\frac{FE}{\nabla} = 0$ $\frac{FP}{\nabla} = 0$ DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:			
	DIMENSION UNITS	SCALE	GENERAL TOLERANCES (UNLESS SPECIFIED)			EC NO: 643544 DRWN: NNANKOLA 2020/06/29 CHK'D: SD 2020/08/31 APPR: SD 2020/08/31
	mm	NTS	ANGULAR TOL ± °			
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING		SERIES