


.XXX ±0.05


DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER		
ORIGINAL		

(1)

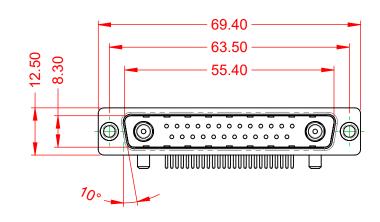




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED



POWER/CO-AX CONTACT RATING: (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX. **INSULATOR RESISTANCE:** 5000MΩ min. DIELECTRIC


WITHSTANDING VOLTAGE:

OPERATING TEMPERATURE:

30A (CURRENT)

-55°C ~ 125°C

1000V AC rms



			SW REFERENCE NO.: 629 COMBO ASSEMBLY			
			DRAWN: C.B	DATE: JAN. 01/20 ⁻	19	
			CHECKED:	DATE:		
	EDAC INC	TORONTO, ONTARIO CANADA OR USED AS THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2	
	EDECTOR EDAC INC TORONTO, ONTARIO CANADA		DRAWING NUMBER: 629-27W2240-3N1		ISSUE	
			PART NUMBER: 629-27W2	2240-3N1	1	



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

