




Modular Accessory for Control of Lighting Fixtures Module Provides Motion Detection and Daylight Harvesting

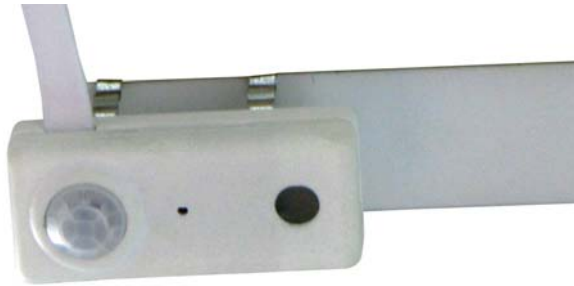

Features

- Auto optical dimming option to set a predetermined brightness to compensate for ambient light
- Seamless integration into existing luminaires
- Turn lights on/off with remote
- Set motion controls to dim lights automatically in empty spaces
- 4 Way Presence Detection

Part Numbers

Module: PDA-ILIGHT-R

Applications

- Indoor Lighting


Safety (Preliminary)

- CE
- FCC

Output Specifications

Input Voltage Range	Current Consumption	Illumination Control Range	Light Sensor Angle	Occupancy Sensor Range	Occupancy Sensor Angle	Occupancy Time Out
12-24VDC	≤12mA	0-1000Lux	60°	6m	90°	10min


Wiring Diagram

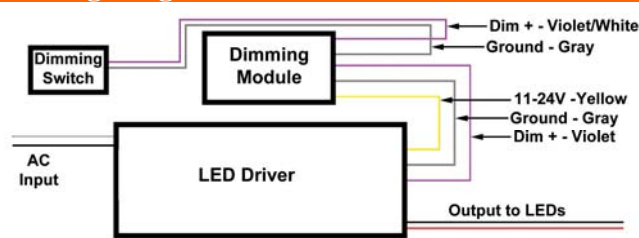

Wire Connections

Position	Color	Length	Gauge
Dim +	Violet	1000mm	AWG22
Dim+	Violet/White	1000mm	AWG22
Ground	Grey	1000mm	AWG22
Ground	Grey	1000mm	AWG22
Aux	Yellow	1000mm	AWG22

Dimension Diagram

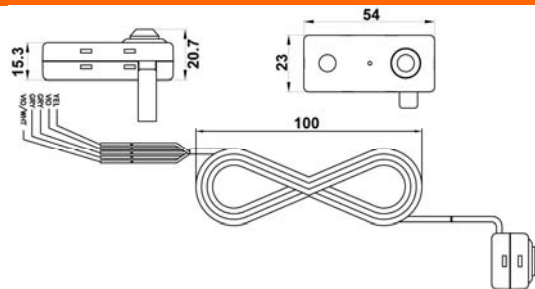

Phihong is not responsible for any error, and reserves the right to make changes without notice. Please visit our website at www.phihong.com for the most up-to-date specifications and contact information.