


| ITEM | PART# | DESCRIPTION | QTY | UOM |
|------|----------|--------------------------------------|-----|-----|
| A,B | 39012106 | 10CKT MINI FIT JR HOUSING 555910P210 | 2 | PC |
| C | 39000124 | MiniFit Term Crp Male C Bs Tin 16awg | 20 | PC |
| D | -- | PAPER PRINTED PAPER WHITE | 1 | PC |

| FROM | TO | DESCRIPTION | COLOR |
|------|-----|-----------------------------------|-------|
| A1 | B5 | 1X16AWG DISC PVC BK UL1015 HOOKUP | BLACK |
| A2 | B4 | 1X16AWG DISC PVC BK UL1015 HOOKUP | BLACK |
| A3 | B3 | 1X16AWG DISC PVC BK UL1015 HOOKUP | BLACK |
| A4 | B2 | 1X16AWG DISC PVC BK UL1015 HOOKUP | BLACK |
| A5 | B1 | 1X16AWG DISC PVC BK UL1015 HOOKUP | BLACK |
| A6 | B10 | 1X16AWG DISC PVC BK UL1015 HOOKUP | BLACK |
| A7 | B9 | 1X16AWG DISC PVC BK UL1015 HOOKUP | BLACK |
| A8 | B8 | 1X16AWG DISC PVC BK UL1015 HOOKUP | BLACK |
| A9 | B7 | 1X16AWG DISC PVC BK UL1015 HOOKUP | BLACK |
| A10 | B6 | 1X16AWG DISC PVC BK UL1015 HOOKUP | BLACK |

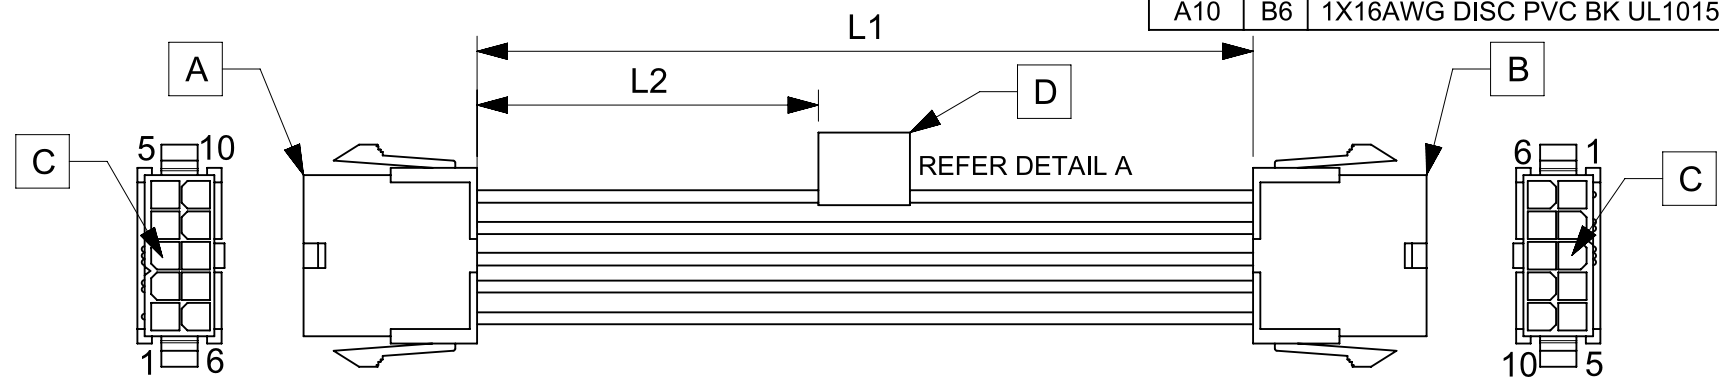

| TABLE | | | |
|-------------|--------|---------|---------------------------------------|
| PART NUMBER | L1 | L2 | TITLE |
| 2153271101 | 150±8 | 63 REF | MINIFIT JR DR P-P 10 CIRCUIT 150MM Sn |
| 2153271102 | 300±10 | 138 REF | MINIFIT JR DR P-P 10 CIRCUIT 300MM Sn |
| 2153271103 | 600±10 | 288 REF | MINIFIT JR DR P-P 10 CIRCUIT 600MM Sn |

NOTES

1. Cable assembly must pass 100% continuity and polarity test.
2. Connector view shown is from mating side.
3. Label text must be 2mm max. in height with Arial font.
4. Label must be wrapped in flag type on a single cable.

MOLEX P/N
MOLEX
BATCH WK/YR

DETAIL A

| REVISION | | | |
|------------|-----|-----------------|---------|
| DATE | REV | DESCRIPTION | CHANGER |
| 2020/03/19 | A | INITIAL RELEASE | ARAJU |

| | | | | | |
|---|---|------------------------|---------------------------------------|----------------------------|--------------------------------------|
| FUNCTIONAL SYMBOLS $\frac{E}{A} = 0$ $\frac{E}{E} = 0$ $\frac{E}{P} = 0$ DIVISIONAL SYMBOLS | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | | CURRENT REV DESC: | | |
| | DIMENSION UNITS | SCALE | GENERAL TOLERANCES (UNLESS SPECIFIED) | | |
| | mm | NTS | ANGULAR TOL ± ° | | |
| | 4 PLACES ± | | 3 PLACES ± | | |
| 3 PLACES ± | | 2 PLACES ± | | EC NO: 638379 | PRODUCT CUSTOMER DRAWING |
| 2 PLACES ± | | 1 PLACE ± | | DRWN: ARAJU 2020/03/19 | |
| 1 PLACE ± | | 0 PLACES ± | | CHK'D: RDESAI01 2020/05/28 | DOCUMENT NUMBER 2153271101 |
| DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | | THIRD ANGLE PROJECTION | DRAWING | APPR: RDESAI01 2020/05/28 | |
| | | | SERIES | INITIAL REVISION: | DOC PART 000 |
| | | | A4-SIZE | DRWN: ARAJU 2020/03/19 | REVISION A |
| | | | 215327 | APPR: RDESAI01 2020/05/28 | SHEET NUMBER 1 OF 1 |
| | | | | MATERIAL NUMBER | |
| | | | | SEE TABLE | |
| | | | | CUSTOMER | |
| | | | | GENERAL MARKET | |