




.XX ±0.13 .XXX ±0.05





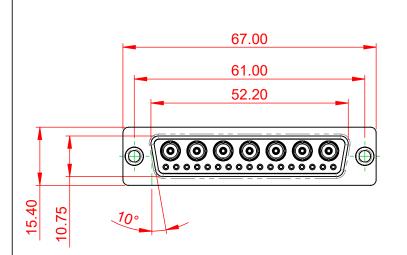



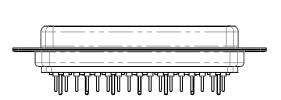

NOTES:

MATERIAL:

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, Sn or Ni PLATED CONTACT: COPPER ALLOY SEE ORDERING GUIDE FOR PLATING


OPERATING TEMPERATURE: -55°C ~ 125°C

SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX. INSULATOR RESISTANCE: $5000M\Omega$ min. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms


	COMBINATION D-SUB		SW REFERENCE NO.: 628 COMBO ASSEMBLY			
			DRAWN: C.B	DATE: JAN. 01/2019		
			CHECKED:	DATE:		
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	4	
	TORONTO, ONTARIO CANADA	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 628-24W	7624-5T1	ISSUE	
	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 628-24W	7624-5T1	1	



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY. OR PLATING

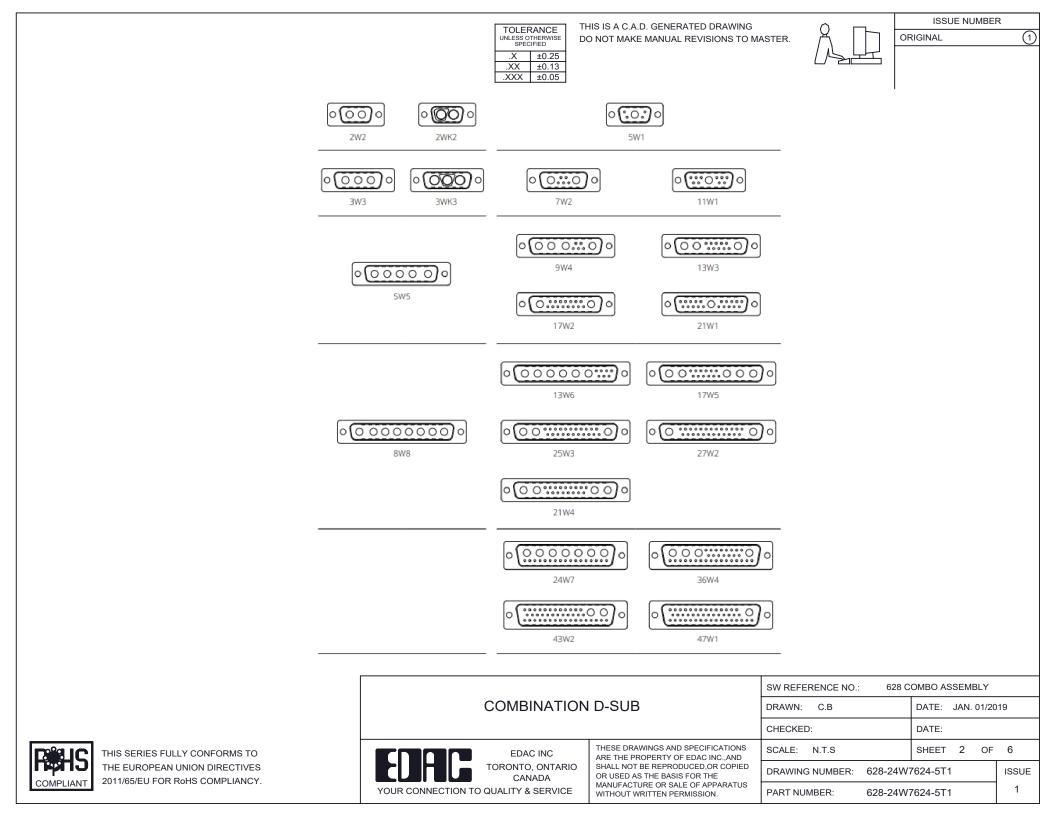

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER. .X ±0.25 .XX ±0.13 .XXX ±0.05





3W3 / 3WK3

5W1 Male/Female

7W2 Male/Female





(1)

21W4 Male/Female




628-24W7624-5T1


		1 2 1 1 272 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0			, sis
		11W1 Male/Female	27W2 Male/Femal	le	
47.08 23.03 14.40 14.40 90 93 93 93 93 93 93 93 93 93 93	8W8 Female 53.50 53.50 53.50 72.83 72.97			63.50 31,75 2 15.24 ++++++++++++++++++++++++++++++++++++	, and the second
CURRENT RATING	IAN	17W2 Male/Female	21W1 Male/Femal	le	
10A / 2.2 20A / 3.3 30A / 3.7 40A / 4.2					1 20
				SW REFERENCE NO.: 628 COMBO ASSEMBLY	
	COMBIN	NATION D-SUB	DRAWN: C.B	DATE: JAN. 01/20	019
			CHECKED:	DATE:	
IS SERIES FULLY CONFORMS TO	EDAC	ARE THE PROPERTY OF EDAG INC., AND	SCALE: N.T.S	SHEET 3 OF	4
E EUROPEAN UNION DIRECTIVES 11/65/EU FOR R₀HS COMPLIANCY.		DA OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 628-24VV	7624-5T1	ISSUE
	YOUR CONNECTION TO QUALITY & S	MANUEACTURE OR SALE OF APPARATUS	PART NUMBER: 628-24W	7624-5T1	1

5W5 Male


5W5 Female



8W8 Male



3.30



WITHOUT WRITTEN PERMISSION.

THIS THE 2011/65/EU FOR RoHS COMPLIANCY. COMPLIANT

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER. .X ±0.25







25W3 Male









36W4 Female





13W3 Male



36W4 Male








13W6 Male



43W2 Male






.XX ±0.13 .XXX ±0.05


9W4 Female

13W3 Female





47W1 Female





17W5 Male


COMPLIANT




47W1 Male







		SW REFERENCE NO.: 628 COMBO ASSEMBLY			
	COMBINATION D-SUB		DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
THIS SERIES FULLY CONFORMS TO	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: N.T.S	SHEET 4 OF	4
THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR R₀HS COMPLIANCY.	TORONTO, ONTARIO CANADA		DRAWING NUMBER: 628-24W7624-511		ISSUE
	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 628-24W	7624-5T1	1



17W5 Female