


NOTES


- 1 MATERIAL  
HOUSING : LIQUID CRYSTAL POLYMER UL94V-0 (COLOR : BLACK)  
TERMINAL : COPPER ALLOY  
FITTING NAIL : COPPER ALLOY
- 2 PLATING  
TERMINAL: CONTACT AREA: SEPARATED GOLD PLATING (0.1 MICROMETER MINIMUM).  
SOLDER TAIL AREA: SEPARATED GOLD PLATING.  
UNDER PLATING : NICKEL OVERALL.  
\*DIVIDE INTO PARTS THE GOLD PLATING OF THE CONTACT AND THE TAIL PART BY THE NICKEL PLATING.  
FITTING NAIL: CONTACT AREA: SEPARATED GOLD PLATING (0.1 MICROMETER MINIMUM).  
SOLDER TAIL AREA: SEPARATED GOLD PLATING.  
UNDER PLATING : NICKEL OVERALL.  
\*DIVIDE INTO PARTS THE GOLD PLATING OF THE CONTACT AND THE TAIL PART BY THE NICKEL PLATING.  
\*EVEN THOUGH GOLD PLATING ON THE TOP SURFACE OF NAIL MIGHT BE THIN, NO FUNCTIONAL PROBLEM.
- △ APPLY FOR (CIRCUIT/2)=EVEN
- 4 MATE WITH : 2068070\*\*2
- 5 TAIL AND FITTING NAIL COPLANARITY TOBE 0.08MAXIMUM.

3.23	2.17	0.70	3.30	2068060062	○	---	6
D	C	B	A	EMBOSSED TAPE PACKAGE	HIGH VOL. TOOL	LOW VOL. TOOL	CIRCUIT
				ORDER No.	SAMPLE PREPARATION ○:TOOLED △:WORK IN PROCESS ---:TOOLING TO BE CONFIRMED		
				CONNECTOR SERIES No. : 2068061**1			


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										
SYMBOLS		DIMENSION UNITS		SCALE		CURRENT REV DESC: PROPOSED				
▽ = 0	mm	10:1		<b>molex</b> 0.35 BB CONN. H=0.6 ICB6 REC ASSY PRODUCT CUSTOMER DRAWING DOCUMENT NUMBER: 2068061000-SD DOC TYPE: PSD DOC PART: 000 REVISION: B SHEET NUMBER: 1 OF 2						
▽ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)									
▽ = 0	ANGULAR TOL ± 3.0°									
▽ = 0	4 PLACES ± 0.03									
▽ = 0	3 PLACES ± 0.03									
▽ = 0	2 PLACES ± 0.05		EC NO: 622978		2019/08/26					
▽ = 0	1 PLACE ± 0.1		DRWN: TNISHIDA02		2019/08/26					
▽ = 0	0 PLACES ± 0.2		CHK'D: YNAITO		2019/08/26					
▽ = 0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPR: RTAKEUCHI		2019/08/26					
▽ = 0	THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER	
			A3-SIZE		206806		SEE CHART		GENERAL	

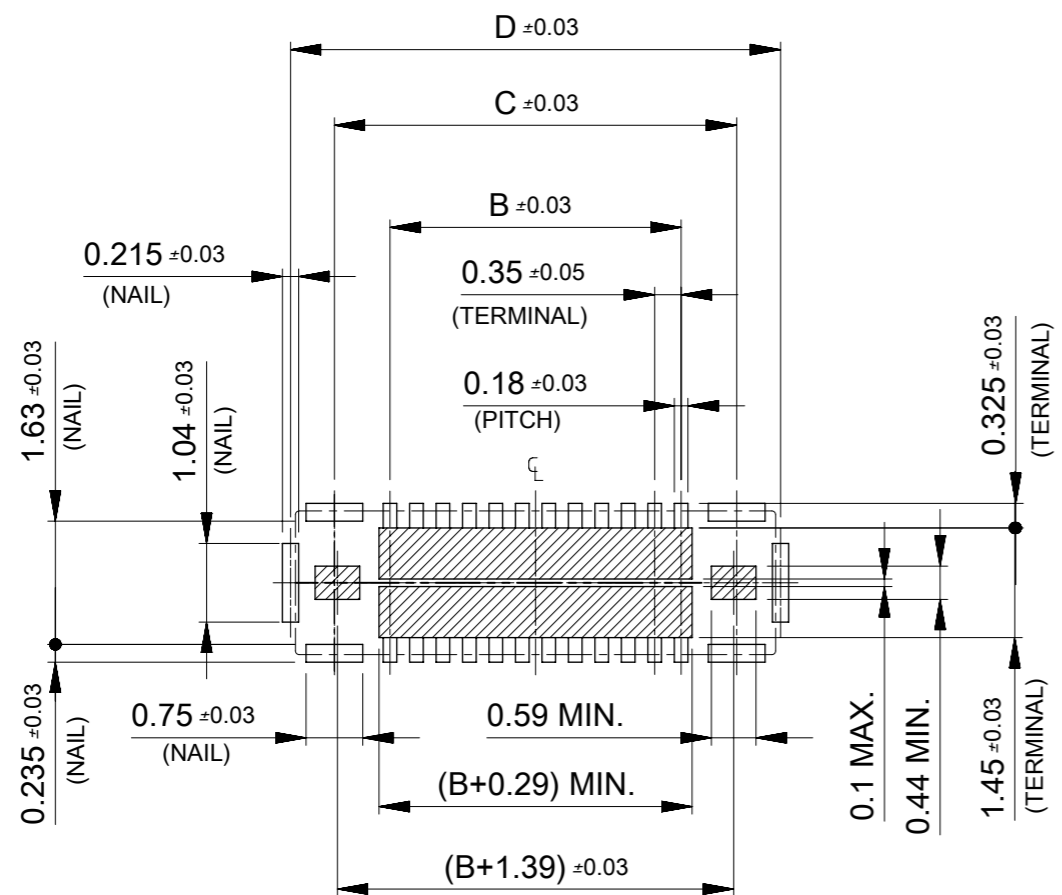











RECOMMENDED P.W. BOARD PATTERN LAYOUT (REFERENCE)

 SOLDERING PROHIBITED AREA.  
WHEN WIRING IS LOCATED,  
THE WIRING MUST BE MASKED BY COVER LAY OR RESIST FILM.

RECOMMENDED THICKNESS OF METAL MASK :  $t=0.08\text{mm}$   
RECOMMENDED OPEN APERTURE RATIO OF METAL MASK : 100%

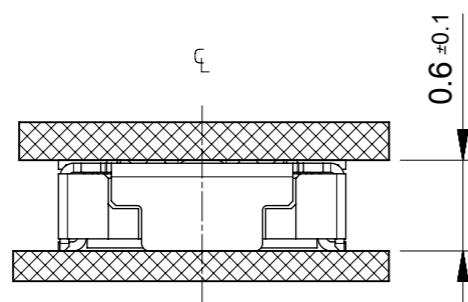

MATED CONDITION

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												
SYMBOLS	DIMENSION UNITS	SCALE	CURRENT REV DESC: PROPOSED				<b>molex</b>					
 = 0	mm	10:1	EC NO: 622978 DRWN: TNISHIDA02 2019/08/26 CHK'D: YNAITO 2019/08/26 APPR: RTAKEUCHI 2019/08/26				0.35 BB CONN. H=0.6 ICB6 REC ASSY					
 = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)									PRODUCT CUSTOMER DRAWING		
 = 0	ANGULAR TOL ± 3.0°						INITIAL REVISION:					
 = 0	4 PLACES ± 0.03											
 = 0	3 PLACES ± 0.03						DOCUMENT NUMBER					
 = 0	2 PLACES ± 0.05		2068061000-SD			DOC TYPE	DOC PART	REVISION				
 = 0	1 PLACE ± 0.1		SEE CHART			PSD	000	B				
 = 0	0 PLACES ± 0.2		GENERAL			SHEET NUMBER						
 = 0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	2 OF 2				
= 0				A3-SIZE	206806	SEE CHART	GENERAL					