

LED Lights

LED Rotating Swivel Lights

Features

- Ideal for Tiny Houses, Mobile Homes, Trailers, RVs and Boats
- Available in Clear or Frosted Lenses
- Flexible, 180° Rotation for Easy Angle Adjustment
- Compact Size with Fashionable Design and Easy Assembly
- 4 LEDs per Light
- 2 Inch Power Lead Wires

Specifications

Rating: 12 / 24VDC, 25mA / 10mA (69-LL-02)
12 / 24VDC, 2W at 13.6V (69-LL-03, 69-LL-04)

LED Type: SMD, 0.3W (69-LL-02)
SMD, 0.5W (69-LL-03, 69-LL-04)

Insulation Resistance: 100MΩ, 500VAC Min

Dielectric Strength: 100VAC, 1 Minute

Operating Temperature: -20° to +60°C


Base Color: Satin / White



Ordering Information

NTE Type No.	LED Color / CCT	Lens Type	Switch	Power Consumption	Output Illumination (Lux)
69-LL-02	Cold White (17671K)	Clear	Yes	1.2W	12VDC, 30.5 ±20%
69-LL-03	White (4000K)	Frosted	No	2.0W	13.6VDC, 27 ±20%
69-LL-04	White (4000K)	Frosted	Yes	2.0W	13.6VDC, 27 ±20%

Dimensions

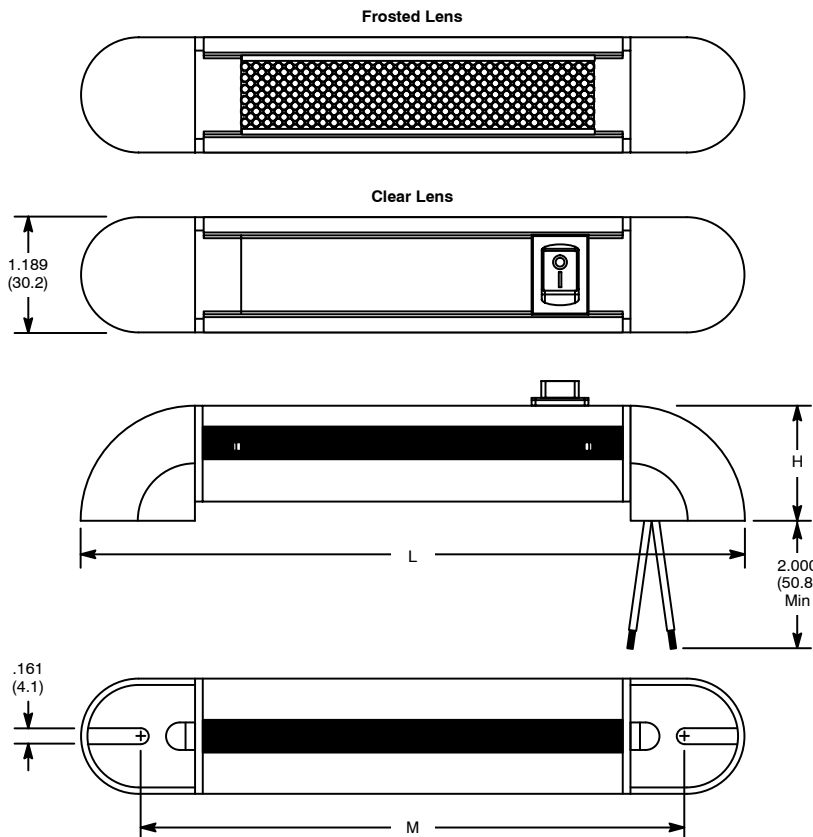

	L	H	M
69-LL-02	6.850 (174.0)	1.181 (30.0)	5.590 (142.0)
69-LL-03	6.850 (174.0)	1.181 (30.0)	5.590 (142.0)
69-LL-04	7.362 (187.0)	1.299 (33.0)	6.102 (155.0)

Mounting Instructions:

1. Remove end covers by sliding away from the light.
2. Drill .079" (2.0mm) pilot holes for screws or rivets.
3. Install screws or rivets to secure light.
4. Replace end covers.