
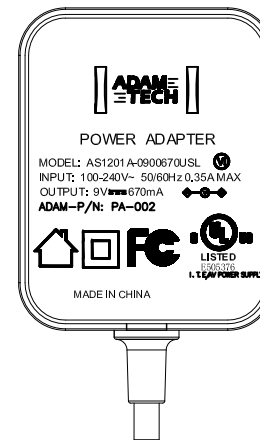


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/18/21	
A		ADDED TOLERANCE	6/10/21	WX/AC

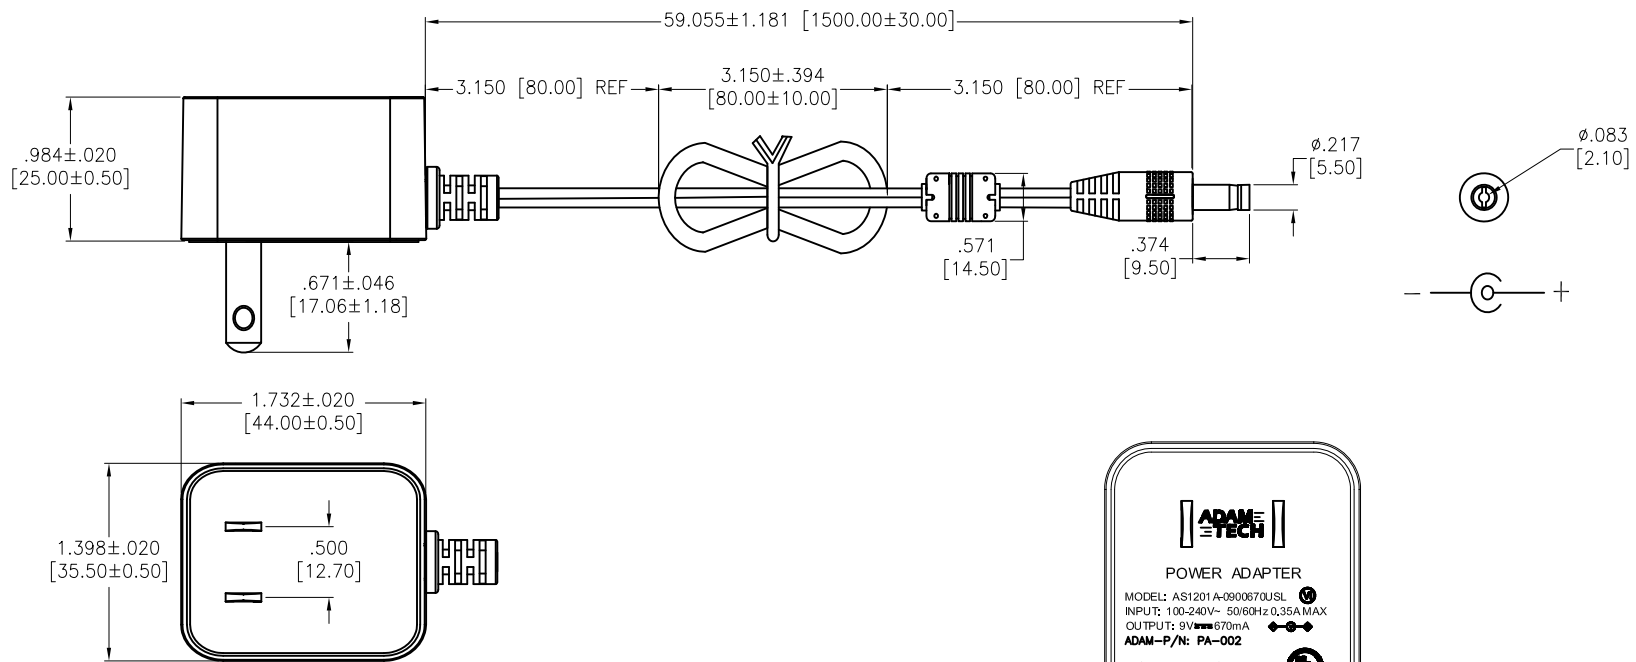

SPECIFICATIONS:

Connector

P1: Power Adapter, NEMA 1-15P
 P2: DC Plug, W/Strain Relief, 5.5*2.1*9.5mm
 Overmold Color: Black PVC-65P

CABLE:

UL2468: 22AWG(17*0.16)*2C 80°C 300V VW-1, O.D: 3.5mm, Jacket Color: Black

Electrical:

Input:

Voltage: 100Vac to 240Vac
 Current: 0.35A Max. @ 100Vac input & max load
 Frequency: 60Hz / 50Hz

Output:

Voltage: 9.0Vdc
 Current: 0.67A max.
 Load Regulation: ±5%
 Line Regulation: ±3%

Insulation Resistance: 10 Mohms min @ 500VDC
 Dielectric withstanding voltage (Hi-pot): 3,000V AC For 1 Minute
 Leakage Current: 0.25mA max. @ 230V AC/50Hz
 Temperature Rating:
 Operating Temperature: 0°C to +40°C
 Storage Temperature: -40°C to +70°C

Environmental:

Lead free, RoHS compliant.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED			
INCHES		HOLES	
.X	± .10	∅X	± .10
.XX	± .020	∅XX	± .015
.XXX	± .015	∅XXX	± .010

ADAM-TECH 909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

APPROVALS		DATE
DRAWN	WX	3/18/21
CHECKED	AC	3/18/21
APPROVED		

TITLE POWER ADAPTER, NEMA 1-15 TO 2.1 X 5.5 X 9.5 DC PLUG, 9 VOLT, 0.67 AMP, UL2468 22 AWG		
SIZE X	PART NO. PA-002	REV. A
REF:	SCALE: NTS	SHEET 1 OF 1