


4 POLE M12



WIDOK OD STRONY DRUTOW  
VIEW FROM WIRES SIDE

Pin	Kolor przew.	Wire color
1	Pomarańczowy	OG
2	Niebieski	BU
3	Pomarańczowy/Biały	OG/WH
4	Niebieski/Biały	BU/WH


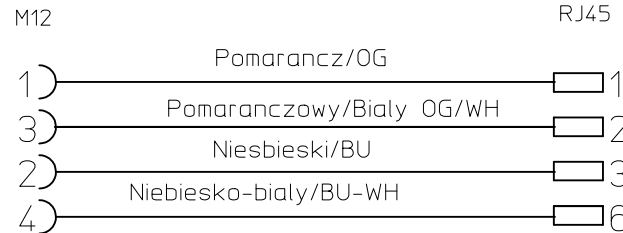


TABELA 1/CHART 1

Molex P/N	Woodhead No	L[mm]
1200490527	E16A06002M035	3500
1300480015	E16A06002M100	10000
1300480016	E16A06002M150	15000
1300480017	E16A06002M200	20000
1300480018	E16A06002M250	25000
1300480019	E16A06002M300	30000
1300480020	E16A06002M350	35000
1300480021	E16A06002M400	40000
1300480022	E16A06002M450	45000
1300480023	E16A06002M500	50000
1300480024	E16A06002M600	60000
1300480025	E16A06002M700	70000
1300480026	E16A06002M900	90000
1300480205	E16A06002M010	1000
1300480206	E16A06002M030	3000
1300480225	E16A06002M040	4000
1300480248	E16A06002M050	5000
1300488005	E16A06002M020	2000

Over/Od	Up to and including/ Do-włącznie	Tolerance/Tolerancja +
0	305	+19
305	915	+45
915	1830	+56
1830	3660	+89
3660	7320	+165
7320	14640	+317
14640	30500	+610
30500		+2% of length/długości

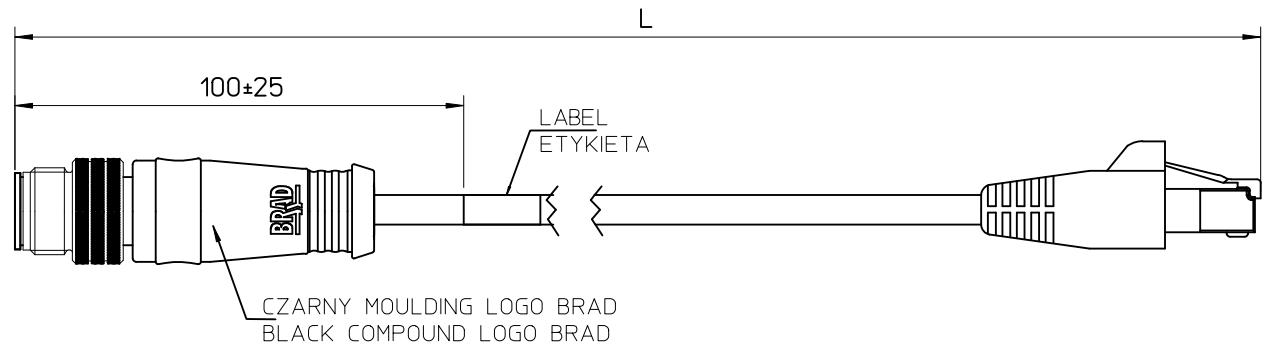

UWAGI:

1. DŁUGOSC CIECIA PRZEWODOW I SPECYFIKACJE NABIJANIA WEDŁUG LISTY CIECIA.

NOTES:

1. FOR WIRES CUTTING LENGTHS AND CRIMPING SPECIFICATION SEE THE CUTTING LIST.

ORIGINAL RELEASE EC NO: IPG2012-0657 DRWIN:MDABROWSKA 2011/02/24 CHKD: APPR:GOGRODNIK 2012/04/12	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	FIRST ANGLE PROJECTION
	▼=0 ◻=0	mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± --- 1 PLACE ± --- ± --- ANGULAR ± ---°	MM ONLY	---	METRIC	
			DRAWN BY DATE	TITLE		
			CHECKED BY DATE	M12-4P(D)-MM ST/RJ45-M-XXM		
			APPROVED BY DATE	MOLEX INCORPORATED		
			MATERIAL NO.	DOCUMENT NO.		
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE CHART 1	SD-130048-003		
			SIZE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		