


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

Item No.	Part No.	Description	TABLE 1										
1	See Table 1	XSR Connector	ITEM	NUMBER OF CIRCUITS	CONNECTOR PART NO.	ASSEMBLY PART NO.	TOTAL WIRE REQUIRED						
2	UL11136, 36 AWG	Red	1	2	02XSR-36S	A02XSR02XSR36R295B	609.6 mm						
<table border="1"> <tr> <td colspan="2"><u>Electrical Specifications</u></td> </tr> <tr> <td colspan="2">Current: 0.2A AC/DC</td> </tr> <tr> <td colspan="2">Voltage: 30V AC/DC</td> </tr> </table>			<u>Electrical Specifications</u>		Current: 0.2A AC/DC		Voltage: 30V AC/DC		1	4	04XSR-36S	A04XSR04XSR36R295B	1219.2 mm
<u>Electrical Specifications</u>													
Current: 0.2A AC/DC													
Voltage: 30V AC/DC													
			1	6	06XSR-36S	A06XSR06XSR36R295B	1828.8 mm						
			1	10	10XSR-36S	A10XSR10XSR36R295B	3048 mm						

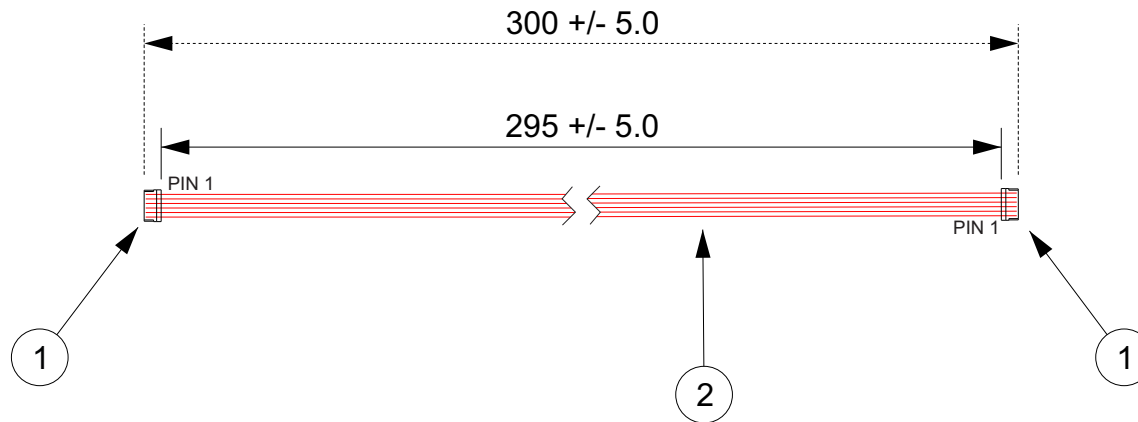

All dimensions are in millimeters with a default tolerance of +/- 5.0 unless otherwise specified.					CUSTOMER NAME			
					DESCRIPTION			
					0.6mm Pitch XSR Standard Catalog Assembly - 11.5" Overall Length - Pin Out: 1 to N			
ZONE	REV	DESCRIPTION	DATE	APPROVED	SIZE	CUSTOMER PART NO.	PART NO.	REV
	1	Add Electrical Specifications	7/03/2018	LM	SCALE 1:1	DRAWING NO. GAM-272	SEE TABLE 1	DATE 4/03/2018